



U.S. DEPARTMENT OF
ENERGY

PNNL-22971

Prepared for the U.S. Department of Energy
under Contract DE-AC05-76RL01830

Supply Security in Future Nuclear Fuel Markets

AM Seward
ET Gitau

TW Wood
BE Ford

November 2013



Pacific Northwest
NATIONAL LABORATORY

*Proudly Operated by **Battelle** Since 1965*

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor Battelle Memorial Institute, nor any of their employees, makes **any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights.** Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or Battelle Memorial Institute. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

PACIFIC NORTHWEST NATIONAL LABORATORY

operated by

BATTELLE

for the

UNITED STATES DEPARTMENT OF ENERGY

under Contract DE-AC05-76RL01830

Printed in the United States of America

Available to DOE and DOE contractors from the
Office of Scientific and Technical Information,
P.O. Box 62, Oak Ridge, TN 37831-0062;
ph: (865) 576-8401
fax: (865) 576-5728
email: reports@adonis.osti.gov

Available to the public from the National Technical Information Service,
U.S. Department of Commerce, 5285 Port Royal Rd., Springfield, VA 22161
ph: (800) 553-6847
fax: (703) 605-6900
email: orders@ntis.fedworld.gov
online ordering: <http://www.ntis.gov/ordering.htm>



This document was printed on recycled paper.

(9/2003)

Supply Security in Future Nuclear Fuel Markets

AM Seward TW Wood
ET Gitau BE Ford

November 2013

Prepared for
the U.S. Department of Energy
under Contract DE-AC05-76RL01830

Pacific Northwest National Laboratory
Richland, Washington 99352

Abstract

Previous PNNL work has shown the existing nuclear fuel markets to provide a high degree of supply security, including the ability to respond to supply disruptions that occur for technical and non-technical reasons.¹ It is in the context of new reactor designs – that is, reactors likely to be licensed and market ready over the next several decades – that fuel supply security is most relevant. Whereas the fuel design and fabrication technology for existing reactors are well known, the construction of a new set of reactors could stress the ability of the existing market to provide adequate supply redundancy. This study shows this is unlikely to occur for at least thirty years, as most reactors likely to be built in the next three decades will be evolutions of current designs, with similar fuel designs to existing reactors.

¹ See: AM Seward, TW Wood, CM Toomey et al. *Redundancy of Supply in the International Nuclear Fuel Fabrication Market: Are Fabrication Services Assured?* PNNL-20861. October 2011.
CM Toomey, AM Seward, TW Wood et al. *Redundancy of Supply in the International Nuclear Fuel Market: Technically Redundant and Politically Assured Fuel Supply.* INMM. PNNL-85476. July 2012.
TW Wood, AM Seward. *Redundancy of Fuel Fabrication Services in the International Nuclear Fuel Market.* PNNL-19234. February 2010.

Acronyms and Abbreviations

ACR	advanced CANDU reactor
AGR	advanced gas reactor
APR	advanced power reactor
ARIS	Advanced Reactors Information System
BWR	boiling water reactor
DOE	U.S. Department of Energy
EPR	European pressurized reactor
GE-H	General Electric-Hitachi
Gen II	Generation II (reactor)
Gen III	Generation III (reactor)
Gen III+	Generation III+ (reactor)
Gen IV	Generation IV (reactor)
GNF	Global Nuclear Fuel
IAEA	International Atomic Energy Agency
LEU	low-enriched uranium
LWR	light water reactor
MSR	molten salt reactor
MTU/yr	metric tons/year
NNSA	National Nuclear Security Administration
NSSS	Nuclear Steam Supply System
PHWR	pressurized heavy water reactor
PNNL	Pacific Northwest National Laboratory
PWR	pressurized water reactor
RBMK	Reaktor Bolschoi Moshchnosty Kanani
SCWR	supercritical water-cooled reactor
SMR	small- and medium-sized reactors
VHTR	very high temperature reactor
VVER	Vodo-Vodyanoi Energetichesky Reactor

Contents

Abstract	iii
Acronyms and Abbreviations	v
1.0 Introduction	1.1
1.1 Nuclear Reactors: Technology and Evolution.....	1.1
1.2 Nuclear Reactor: Fuel Technology and Evolution of Fuel Design	1.4
1.3 Nuclear Fuel: Market Structure and Evolution	1.6
2.0 Approach and Methodology	2.1
2.1 Survey of Potentially Available Technologies	2.1
2.2 Country Selection: Demand Side	2.2
2.3 Aligning Supply and Demand According to Nuclear Capacity Growth Forecast.....	2.3
2.4 Net Generation, Retirements, and New Builds	2.3
3.0 Results	3.1
3.1 Results of Expert Elicitation to Define Population of Anticipated Reactors	3.1
4.0 Conclusions	4.1
Appendix – PNNL Nuclear Fuel Fabrication Market Model.....	A.1

Figures

1.1 Evolution of Nuclear Reactor Technology	1.3
1.2 Nuclear Reactor Market Consolidation	1.7

Tables

1.1 Nuclear Power Reactor Population by Type.....	1.2
1.2 Gen IV Reactor Concepts	1.4
1.3 Fuel Features.....	1.5
1.4 International Nuclear Fuel Fabrication Market.....	1.7
2.1 Countries Included in Analysis.....	2.2
2.2 Reactor Lifetime Assumptions	2.4
3.1 Tabulation of Expert Results	3.1

1.0 Introduction

Pacific Northwest National Laboratory (PNNL) has for several years been assessing the reliability of nuclear fuel supply in support of the U.S. Department of Energy/National Nuclear Security Administration. Previous PNNL work has addressed the ability of the existing market to respond to supply disruptions that could occur for technical and non-technical reasons.¹ This previous analysis determined that existing fabrication plants could provide backup fabrication services to most of the world's power reactors, assuming that alternative fabricators were willing to provide backup services and able to obtain the necessary regulatory certifications.

This study is an assessment of the reactor technology and fuel requirements of reactors anticipated to be licensed through 2050. It is in the context of anticipated reactors – that is, reactors defined in this study as those likely to be licensed and market ready between now and 2050 – that fuel supply security is most relevant. Whereas the fuel requirements of existing reactors are well known, the construction of a new fleet of reactors could strain the existing market's capacity to provide adequate supply redundancy. Of specific interest in this study is whether reactor designs emerging during this time period would require new fuel manufacturing technology, which could prove a “disruptive innovation” in the fuel markets.

1.1 Nuclear Reactors: Technology and Evolution

There are currently some 440 commercially operating nuclear power reactors globally, with another 30 reactors under construction or scheduled to be restarted. Table 1.1 presents a breakdown of reactor types and market share of all commercial reactors in the world. The majority of these are light water reactors (LWR), with pressurized water reactors (PWR) (including vodo-vodyanoi energetichesky reactors [VVER]) accounting for some 66 percent of all power reactors. Pressurized heavy water reactors (PHWR) were developed for commercial use by Canada and successfully exported to a number of countries, including Argentina, China, South Korea, and Romania. BWRs are the second most common

¹ PNNL analysis characterized the functioning and efficacy of the fuel fabrication market in circumstances in which the primary supply is disrupted at the technical (i.e., fabrication plant) and non-technical (i.e., country) levels. PNNL developed a data-based model (relying on NAC International's *FuelTrac*) of the fuel fabrication market to simulate fabrication plant outages. The model simulated outages of varying durations at specific fabrication plants and output predictions about the reactors affected and the degree of fuel delivery delay. By applying a set of constrained assumptions about a fabricators' technical ability to build specific fuel designs, the modeling provided some initial insight into the extent of vulnerability to nuclear fuel supply disruption at the level of individual fabrication plants, reactors, and countries. See: 1) AM Seward, TW Wood, CM Toomey et al., *Redundancy of Supply in the International Nuclear Fuel Fabrication Market: Are Fabrication Services Assured?* PNNL. October 2011; 2) CM Toomey, AM Seward, TW Wood et al. *Redundancy of Supply in the International Nuclear Fuel Market: Technically Redundant and Politically Assured Fuel Supply*. INMM. July 2012; 3) TW Wood, AM Seward. *Redundancy of Fuel Fabrication Services in the International Nuclear Fuel Market*. PNNL 19234. February 2010.

type of reactor. Reaktor bolschoi moshchnosty kanani (RBMK)¹ reactors are operational only in Russia, and operating advanced gas-cooled reactors (AGRs) and Magnox reactors² are limited to the United Kingdom.

Table 1.1. Nuclear Power Reactor Population by Type

Reactor Type	Percent of Population
PWR ^(a)	65.6
BWR	22.9
PHWRs	6.0
RBMK	3.1
Gas-Cooled Reactors (Magnox, AGR)	2.4

(a) Includes VVERs.
Source: NEA/OECD 2009

Power reactor designs have evolved, and are continuing to evolve, through several generations. Figure 1.1 presents a timeline for each generation and several examples of specific designs of each. The current operating global nuclear fleet is primarily composed of Generation II (Gen II) reactor designs. These facilities were designed to operate for 40 years and rely upon "... active safety features involving electrical and mechanical operations that are initiated automatically" or by an operator. China, Russia, and South Korea have recently begun operations at several Gen II reactor facilities. China is currently the only country with plans to continue building Gen II reactors. After the accident at Fukushima in 2011, the Chinese State Council Research Office released a report containing its independent policy recommendations for strategic nuclear development. The State Council Research Organization stated in the report that the number of Gen II reactors under construction should not be large given international concerns over their safety.³ As a result, China has worked to increase safety at its Gen II facilities to Generation III (Gen III) standards and modified its plans to focus on the adoption of Gen III reactors.

¹ RBMK also is as the *High-Power Channel-Type Reactor*. The RBMK is a Russian PWR distinguished by individual fuel channels and the use of graphite as a moderator.

² Magnox reactors are graphite-moderated, gas-cooled reactors that use natural uranium for fuel and magnesium alloy as the fuel cladding. The Magnox design was replaced by the advanced gas-cooled reactor (AGR) design, and only one Magnox reactor remains in operation, with shutdown expected in the near future. There are currently 14 AGRs in operation on some seven sites. Both reactor designs are obsolete; no more reactors of either design are planned for construction.

³ http://www.world-nuclear-news.org/NP_Maintain_nuclear_perspective_China_told_1101112.html

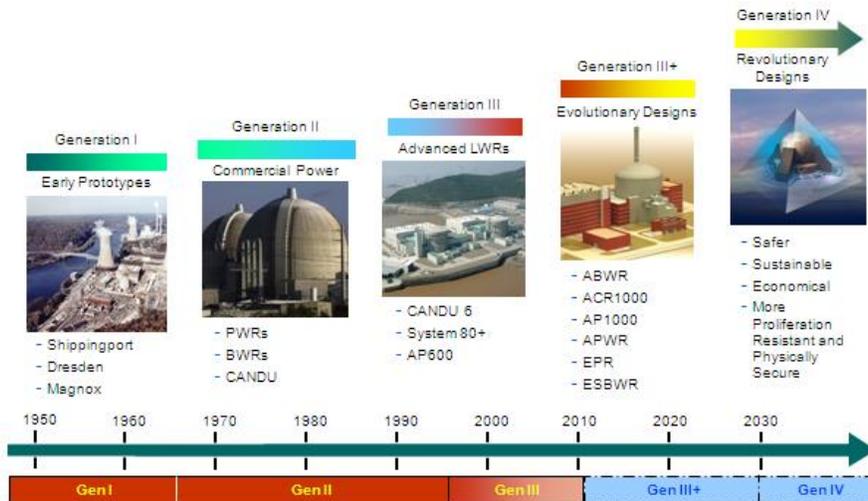


Figure 1.1. Evolution of Nuclear Reactor Technology¹

The majority of reactors currently under construction for commercial operation are Gen III reactors. While there is no universally accepted technical distinction between Generation II (Gen II) and Gen III reactors, Gen III reactors can be characterized by evolutionary improvements in safety, reliability, and efficiency. Designs widely considered to fall under this category include the CANDU 6 and AP600. An extension of this category is known as Generation III+ (Gen III+). Gen III+ reactors offer significant improvement in safety with systems incorporating passive features that do not require active controls or operator intervention during off-normal or accident scenarios.² Designs that fall into this category include the European Pressurized Reactor (EPR), Advanced CANDU Reactor (ACR)-1000, and Advanced Power Reactor (APR)-1400.

In the near term, Gen III/III+ designs will continue to be developed and deployed. However, in the coming decades more advanced reactor designs known as Generation IV (Gen IV) reactors and small- and medium-sized reactors (SMRs) will enter, and may ultimately dominate, the reactor market.

Gen IV reactor designs have been under development for decades, with several demonstration and prototype facilities being successfully operated. However, it was not until 2001 when the Gen IV International Forum (GIF)³ was established to coordinate global research and development efforts. In late 2002, GIF announced that it had identified six reactor concepts as priorities for deployment between 2020 and 2030. These Gen IV concepts, which are presented in Table 1.2, are expected to offer increased safety, higher efficiency, cogeneration opportunities, reduced wastes, and increased proliferation resistance and security.

¹ <http://www.gen-4.org/Technology/evolution.htm>.

² Goldberg, SM and R Rosner, Nuclear Reactors: Generation to Generation. American Academy of Arts and Sciences, 2011.

³ Members as of September 2013: Canada, China, Euratom, France, Japan, South Korea, Russia, South Africa, Switzerland, United States, Argentina, Brazil, United Kingdom

Table 1.2. Gen IV Reactor Concepts¹

Reactor Concept	Description
Gas-cooled fast reactor	Fast neutron spectrum, helium cooled, and closed fuel cycle
Very high temperature reactor (VHTR)	Graphite-moderated, helium-cooled reactor with a once-through uranium fuel cycle
Supercritical water-cooled reactor (SCWR)	High-temperature, high-pressure, water-cooled reactor that operates above the thermodynamic critical point of water
Sodium-cooled fast reactor	Fast neutron spectrum, sodium-cooled reactor, and closed fuel cycle
Lead-cooled fast reactor	Fast neutron spectrum, lead/bismuth-cooled reactor, and closed fuel cycle
Molten salt reactor (MSR)	Produces fission power in a circulating molten salt mixture with an epithermal-spectrum reactor and a full actinide recycling center

With the growing global nuclear renaissance, an interest in SMRs from smaller countries with limited grid capabilities has pushed new research and development into these types of reactor designs. SMRs are expected to offer better safety, security, and proliferation resistance. These designs also are expected to provide new nuclear countries with unstable or small grids a scalable nuclear option and allow the countries to increase capacity at a lower, and less expensive, rate than traditional large-scale reactors. SMRs are defined as reactors that produce less than 700 MWe from either a single unit or collection of smaller units. As part of this definition, small-sized reactors are produce less than 300 MWe, while medium-sized reactors produce between 300 MWe and 700 MWe. Numerous SMR designs have been released; however, the International Atomic Energy Agency (IAEA) has captured only 32 designs as part of its Advanced Reactors Information System (ARIS) database. These SMR designs can be placed into two categories: LWR designs and non-LWR designs. LWR designs incorporate system elements traditionally found in large, commercial PWRs and BWRs, while the non-LWR SMR designs are similar to larger liquid metal-cooled reactors, heavy-water reactors, and gas-cooled reactors. Many of the non-LWR SMR designs also represent smaller-scale Gen IV reactor concepts.

1.2 Nuclear Reactor: Fuel Technology and Evolution of Fuel Design

Over the past 40 years, fuel design has continuously evolved, with improvements including the use of advanced alloys, incorporation of debris screens, use of burnable poisons, and evolution of array geometry. This has resulted in better fuel performance - including lower fuel failure rates and increased burnup).

Designing a new type of fuel and fabricating a fuel element or assembly, and then qualifying it for use in a reactor, is a lengthy and costly engineering development program that must satisfy many regulatory requirements.² It typically takes some 15 years from the time a fuel design improvement is identified and the time when full fuel cores incorporating the innovation are deployed in a reactor.³

¹ Source: Based on information presented on Generation IV International Forum website. <http://www.gen-4.org/Technology/systems/index.htm>

² <http://energy.gov/ne/advanced-modeling-simulation/nuclear-fuels>

³ This information is based on Framatome ANP experience. Michel Watteau, Bernard Estève et al. *Framatome ANP Extended Burnup Experience and Views on LWR Fuels*. World Nuclear Association. 2001.

Reactor fuel is tailored to the specific needs of an individual reactor, which are determined by the physical characteristics of the reactor, the operating utility’s fuel cycle management strategy, and national (or in some cases regional) licensing requirements.¹ Hence, fabricated fuel, in general, is usable only in a reactor of a specific design, and in many cases, only in an individual reactor. Table 1.3 describes the features of various fuel types for commercial nuclear power reactors currently in operation globally.

Table 1.3. Fuel Features²

Reactor Type	Fuel Material	Fuel Pin Cladding	Typical Assembly	Enrichment
AGR	UO ₂	Stainless Steel	Circular array of pins in graphite sleeve	2–4%
Magnox	U metal	Magnesium alloy	Circular rod	Natural
PHWR	UO ₂	Zirconium alloy	Circular bundle	Natural
RBMK	UO ₂	Zirconium alloy	Circular array	Up to 2.8%
BWR	UO ₂	Zirconium alloy	Square array	Up to 4.95%
PWR	UO ₂	Zirconium alloy	Square array	Up to 4.95%
VVER	UO ₂	Zirconium alloy	Hexagonal array	Up to 4.95%

Gen IV and SMR reactor designs are expected to use a range of fuel designs and materials, with many relying upon current, or slightly evolved, low enriched uranium (LEU) fuel designs. Except for the VHTR and MSR, Gen IV reactor designs are expected to be capable of using entire core loads of pin-type MOX fuel that contains uranium, thorium, plutonium, and/or minor actinides to be burned in order to reduce wastes. Designs for the lead-cooled fast reactor and the gas-cooled fast reactor have been developed that are capable of using uranium nitride fuel. The VHTR and MSR present the most radical change in fuel design for Gen IV reactors. The VHTR uses TRISO-coated particle uranium, plutonium, and/or thorium fuel in either a pebble or prismatic form to create the fuel assembly. The MSR has two design derivatives, one that uses a liquid fluoride salt containing uranium or thorium as a fuel. The other uses prismatic fuel elements containing TRISO-coated fuel particles that are cooled using a molten salt. Among SMRs, medium-sized LWR SMR designs plan to utilize current standard LWR fuel assemblies. Many small-sized LWR SMR designs plan to use assemblies similar to standard LWR assemblies, but that are only half the height of those found in large-scale commercial reactor facilities. Fuel designs among non-LWR SMR designs will vary with each design. SMR variants of Gen IV designs can be expected to utilize fuel types similar to their larger Gen IV cousins.

A few preliminary conclusions can be drawn on the likely evolution of fuel design:

¹ <http://world-nuclear.org/info/Nuclear-Fuel-Cycle/Conversion-Enrichment-and-Fabrication/Fuel-Fabrication/>

² “Current Trends in Nuclear Fuel for Power Reactors.” IAEA Information Document for IAEA General Conference. September 2007. http://www.iaea.org/About/Policy/GC/GC51/GC51InfDocuments/English/gc51inf-3-att5_en.pdf

[1] Existing fuel design has evolved to extract increasing performance from a basic design. Further evolution will [a] yield increasingly small performance changes at the margin, but [b] ensure that fuel can be made pretty much as it is now

[2] At some point, the prospect of *large* performance increases will justify jumping to a radically new core and fuel design. This will be disruptive innovation for the fuel manufacture industry.

[3] Gen III and III+ designs will not produce the type of fuel manufacture revolution described in [2], but *some* Gen IV designs (including SMR variant of these), will. Thus the timing for radical change in fuel fab market is dictated by the timing (and pace of introduction) of these specific designs.

1.3 Nuclear Fuel: Market Structure and Evolution

There are currently three major global suppliers of LWR fuel: the French-owned company AREVA, Westinghouse (owned by Toshiba), and Global Nuclear Fuels (GNF), which is a joint venture of General Electric, Toshiba, and Hitachi (General Electric, 51 percent; Toshiba, 24.5 percent; Hitachi, 24.5 percent). Typically, the reactor vendor supplies the first core and the initial reloads. Thereafter, LWR fuel is purchased in a set of a competitive markets in which fabricators compete to supply fuel for some reactors of their competitors' designs. Most of this competition is based on product differentiation (comparative fuel performance) rather than price. Table 1.4 presents respective vendor shares of the fuel market.

Smaller national and regional fuel fabricators serve local markets in Argentina, Brazil, China, Canada, India, Japan, Romania, South Korea,¹ and Spain. These include non-LWR fabricators (i.e., PHWRs). Most of the smaller vendors entered the market later than the largest fuel and reactor vendors, and they largely service indigenous reactors, although they also may have licensing arrangements to supply fuel to reactors designed by foreign vendors. Key players among these smaller fuel fabricators are ENUSA (Spain), China National Nuclear Corporation, and Korea Nuclear Fuel Company Ltd. (KNFC - South Korea). Such vendors tend to be dominant (and sometimes exclusive) suppliers for their domestic fuel markets.

PHWR fuel warrants special note in this regard, as it is produced almost exclusively by the countries in which these reactors are located. Because PHWRs use natural or slightly enriched uranium in large quantities, fuel fabrication facilities are typically part of the initial reactor deal. However, on occasion, PHWR fuel may be imported from a foreign supplier.² Also of note is the market for MOX fuel. Currently, France, Japan, and India are the only countries that actively use MOX fuel as a part of operations for commercial reactor facilities. France and India are the only countries with domestic fabrication capacity to supply commercial fuel, while Japan is expected to begin fabrication operations in 2015 at its Rokkasho-Mura facility.

¹ South Korean fuel fabricator KNFC currently supplies fuel domestically. However, in July 2012, South Korea was awarded the fuel contract for the four reactors being built at the Barakah site in the UAE. This contract is expected to cover the first 15 years of operation for the 4 units. [<http://www.enec.gov.ae/media-centre/news/content/emirates-nuclear-energy-corporation>]

²World Nuclear Association 2007. Advanced CANDU reactors (ACRs) use slightly enriched uranium.

Table 1.4. International Nuclear Fuel Fabrication Market¹

Vendor	Market Share (%)
AREVA	31.7
Westinghouse-Toshiba	20.3
Global Nuclear Fuel (GNF)	19.0
TVEL (Atomenergoprom)	7.8
Nuclear Fuel Industries	5.2
Mitsubishi Nuclear Fuel (MNF)	4.3
Enusa	3.9
Korea Nuclear Fuel Company (KNFC)	3.9
China National Nuclear Fuel Corp (CNNC)	2.0
Industrias Nucleares do Brazil (INB)	2.0

As shown in Figure 1.2, there has been a marked consolidation of the reactor and fuel vendors over the past few decades.²

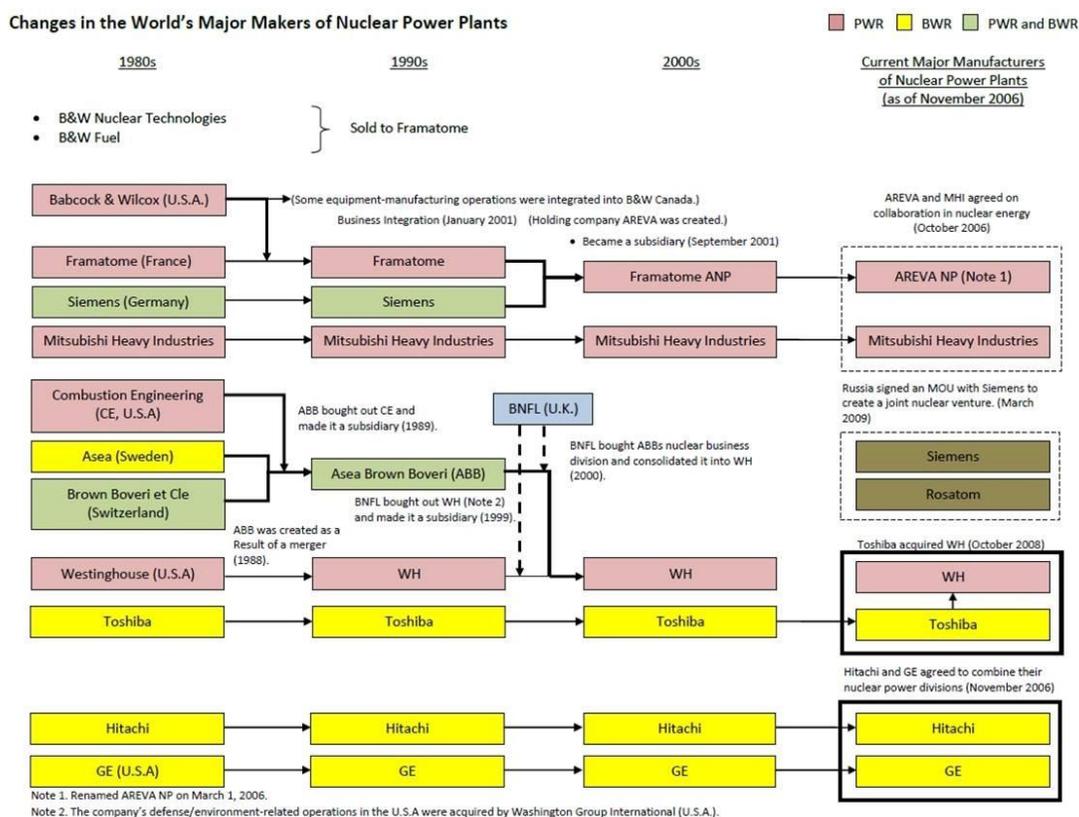


Figure 1.2. Nuclear Reactor Market Consolidation (METI, updated)

¹ Source: Market Competition in the Nuclear Industry. OECD 2007.

² Fifteen years ago, there were five major fabricators of LWR fuel: 1) Framatome-Cogema, 2) General Electric, 3) Westinghouse, 4) Siemens, and 5) Asea Brown Boveri-Combustion Engineering (NEA/OECD 2009).

As with the reactor vendor market, there are technical, financial, and economic barriers to entry¹ in the nuclear fuel fabrication market. Access to the technology (e.g., patents, processes, intellectual property) required to build a technically competitive product is the primary technical barrier.

Economic barriers also include the mutual fixed costs and investment required to commence a fuel fabrication plant. One measure of the economic barrier to entry is the “minimum economic scale.” The minimum economic scale can be used to compare the cost of doing business for an economically feasible new entrant to an industry with the cost for an established firm. Rothwell calculated these figures for the LWR fuel fabrication market using a detailed cost model.² The results showed that a new entrant must operate at a scale of about 1000 MTU (metric tons uranium)/year to offer a competitive price. In contrast, an incumbent firm can operate at a minimum economic scale of 270 MTU/year. Given that 1000 MTU represents about 10 percent of the annual global fuel requirement, this presents a significant barrier to entry by new fabricators.³

Because the cost of fuel testing and innovation is borne by the fuel vendor, further advancement in fuel design will likely lead to greater industry concentration. Established firms with substantial R&D capabilities are likely to be more competitive, and the barriers to entry by smaller, regional fuel fabricators will be greater.

The large investment of time and money required to develop competitive fuel designs also creates an economic threshold market size (number of reactors) below which it is not profitable to compete for fuel business. As a consequence, fuel designers tend to specialize in reactor types with at least four to five deployed units. This market paradigm makes supplying fuel for new and unproven reactors designs risky relative to their existing core business.

There is sufficient technical redundancy in the market for LWR fuel.⁴ The “international nuclear fuel market is clearly somewhat imperfect, but it has always performed well on its basic function of supplying reactors.”⁵ Despite the potential for transportation delays, political supply disruptions, fabrication plant outages, and a myriad of other factors, the existing market has functioned well to supply nuclear fuel to operate power reactors.

¹ Freedom of entry is a prerequisite for perfect competition. To the extent that entry is restricted, (a few) existing firms may raise prices. The trend toward consolidation in the fabrication sector in the last two decades may impact competition within the industry.

² Rothwell G. *Cost Structure and Market Sustainability of the International Light Water Reactor Fuel Fabrication Industry*. April 2008.

³ Ibid.

⁴ See Wood T and A Seward. *Redundancy of Fuel Fabrication Services in the International Nuclear Fuel Market*. February 2010. PNNL-19234.

⁵ Kidd S. “Fuel – nuclear power’s trump card?” *NEI Magazine*. 7 July 2009.

2.0 Approach and Methodology

Our analysis sought to align nuclear power technologies with anticipated nuclear capacity growth in countries where the greatest expansion is expected to occur. This required definition of supply (i.e., a set of anticipated reactors) and demand (i.e., the set of countries in which nuclear growth is projected to occur). It also required application of country-specific information about what types of reactors are likely to be of interest to individual countries. A set of nuclear growth forecasts was then used to align specific reactor types with individual countries through the period of analysis (through 2050).

2.1 Survey of Potentially Available Reactor Designs

This study relied upon the IAEA ARIS database¹ to define the set of reactor designs under development from which designs with a reasonable chance of significant market penetration would be selected. The reactor set supplied by ARIS was supplemented with additional reactor designs not contained in the ARIS database to produce a comprehensive list of candidate designs for licensing and construction through the period of analysis (2012 to 2050). A separate analysis assessed the potential market penetration of competing SMR designs. The most prominent SMR designs, however, were included in the base study to account for this important reactor market.

Some 45 designs were chosen for evaluation. Information about the chosen designs is provided in Appendix A. This set of reactor designs was then evaluated by a group of PNNL reactor experts to determine which designs were potentially licensable. Each design was assessed based on the following nine objective criteria:

1. Nuclear steam and supply system (NSSS) vendor in place
2. Architect engineer in place
3. Site selected
4. At least one interested utility
5. Fuel supplier identified
6. Reactor design has licensing precedent
7. Funding source in place
8. Fuel material identified
9. Cladding material identified

A design needed to meet six of the nine criteria to be considered licensable and deployable in significant numbers in our study timeframe. After narrowing down likely candidate designs in this way, country-specific information was used to predict which reactor type (and how many) of each would be built.

¹ <http://aris.iaea.org>

2.2 Country Selection – Demand Side

According to the IAEA, some 30 states that do not currently have nuclear power are currently planning or considering its development.¹ Given that fuel markets will be driven largely by growth in countries with large nuclear power programs, country selection for our study was limited to states in which 95% of new nuclear energy growth is projected to occur.² The countries included in this study and their expected contributions to new global nuclear generating capacity are listed in **Error! Not a valid bookmark self-reference..**

Table 2.1. Countries Included in Analysis³

Country	Projected Number of Reactor Units ^(a)	Percentage of Projected Global Nuclear Capacity Growth
Belarus	2	1%
Brazil	6	2%
Bulgaria	4	1%
Canada	5	2%
China	125	37%
Czech Republic	2	1%
Egypt	2	1%
Finland	5	1%
France	13	4%
Hungary	3	1%
India	32	10%
Italy	3	1%
Japan	9	3%
Mexico	3	1%
Poland	3	1%
Russia	19	6%
South Africa	5	1%
South Korea	21	6%
Spain	2	1%
Taiwan	5	2%
Thailand	2	1%
Turkey	3	1%
U.A.E.	5	2%
UK	4	1%
Ukraine	4	1%
USA	26	8%
Vietnam	3	1%

¹ Of the 27 countries considering or planning for nuclear power in 2012, 10 are from the Asia and the Pacific region, 10 are from the Africa region, 7 are in Europe (mostly Eastern Europe) and 2 are in Latin America. http://www.iaea.org/About/Policy/GC/GC56/GC56InfDocuments/English/gc56inf-6_en.pdf

² Countries that might buy a small number of reactors were excluded based on the logic that they are below the economic threshold for fuel manufacturer investment of growth in which nuclear generating capacity is likely to occur.

³ Italy was removed from consideration as in 2011 the country elected to not pursue development of nuclear energy. Japan was also removed due to the uncertainties tied to recovery from the events at Fukushima.

(a) Based on a nominal 1000 MWe capacity reactor facility.

The countries included in this study were chosen based on nuclear generating capacity projections from the UxC *Fabrication Market Outlook 2010* report. That report projected the number of reactor units and total generating capacity for 52 countries that UxC predicts will generate commercial, grid-connected electrical nuclear generating capacity by 2030.

The projected generating capacity for several countries was limited to the construction of one or two units. These countries were not included in the study, as their probability of building domestic nuclear capacity would overall have a limited impact on the demand of nuclear fuel.

2.3 Aligning Supply and Demand According to Nuclear Capacity Growth Forecast

Following identification of a population of anticipated reactor designs and the countries in which the majority of nuclear generating capacity growth is likely to occur, the next step was to align capacity forecast by country with available nuclear technologies by assigning specific reactor types to each country. The country distribution of reactors contains a great deal of information about what general types of reactors will be built, but it does not address specific reactor designs a country may choose (i.e., advanced LWR vs. Westinghouse AP-1000). This approach avoids trying to compare a wide range of designs “on the technological merits” and exploits what many countries have already published about reactors of interest.¹

The basis of this alignment varied by decade, and greater certainty was associated with reactor technology and vendor design choices in the early years of the study. The UxC nuclear generating capacity projections provided projections of specific reactor types with individual countries through 2030; these projections were used as the basis for the 2012 to 2030 projections. From 2031 to 2050, the rate of nuclear growth in a country for each decade beyond 2030 was determined using a linear projection of pre-2030 capacity figures in the UxC data.

2.4 Net Generation, Retirements, and New Builds

In order to derive new build forecasts from net capacity forecasts, assumptions on the rate and distribution of retirements for existing reactors were required. To generate a retirements forecast, a set of average reactor lifetimes was assumed based on PNNL expert assessment. Assumed reactor lifetimes are listed in Table 2.2.

Using the projected generating capacity and expected retirements, a required additional nuclear generating capacity was determined for each decade. This capacity represents the amount of new generating capacity a country must bring online within that decade to meet its projected capacity at the end of the decade. The required additional nuclear generating capacity was used as a guide, rather than a rule, while making reactor type/design projections.

¹ PNNL analysis in FY 2014 will advance the analysis further by aligning nuclear capacity growth per decade through 2050 by individual country and specific reactor design.

Table 2.2. Reactor Lifetime Assumptions¹

Reactor Type	Assumed Lifetime
RBMK	50
Magnox	50
AGR	50
Old BWR	50
New BWR	60
Old PWR	60
New PWR	60
Old VVER	60
New VVER	60
PHWR	60
Fast Breeder Reactor (FBR)	50
Unknown	50

To the extent possible, stated nuclear energy development plans for each country were in the projections, as well as documented dates in country profiles available from the World Nuclear Association.² These projections thus take into account explicit design purchases, plans, and proposals that each country has released. In most cases this information was only available for the period from 2021 to 2030. For projections to 2050, common trends identified for reactor types (e.g., LWR, HWR, etc.) were drawn from publicly available information.

See Appendix A for the complete set of country projections.

¹ A distinction was made between “new” and “old” reactor types to account for general technical improvement in reactor designs. There is no clear distinction, but “new” reactor types are generally those built in the past 25 years.

² <http://www.world-nuclear.org/>

3.0 Results

3.1 Expert Elicitation to Define Population of Anticipated Reactors

Using the criteria described in section 2.1, and expert group identified a set of designs as those most likely to be built in our study timeframe. These are primarily advanced LWR designs, specifically, PWRs and BWRs. More advanced versions of PHWRs were judged to be less successful, but still realistic, options for future reactor deployment. Several SMR designs also were considered to be successful, in particular those that are LWR designs. Table 3.1 presents a tabulation of results from the expert elicitation.¹

Table 3.1. Tabulation of Expert Results²

Reactor	Expert #1	Expert #2	Expert #3	Expert #4	Actual Status	Proposed Entry Decade
4S	never	12-20	31-40	21-30	Conceptual	
ABWR	12-20	12-20	31-40	12-20	In operation	12-20
ABWR-II	21-30	31-40	41-50	never	Basic Design	31-40
ACR-1000	12-20	21-30		12-20	Basic design	21-30
AHWR	21-30	50+	50+	31-40	Basic design	
AP-1000	12-20	12-20	31-40	12-20	Under construction	12-20
AP-600	never	41-50	41-50	never	Basic Design	
APR-1000	21-30	31-40	41-50	21-30	Basic Design	21-30
APR-1400	12-20	12-20	31-40	12-20	Under Construction	12-20
APWR	12-20	12-20	41-50	12-20	Licensing certification	12-20
ATMEA1	21-30		50+	12-20	Basic design	
CAREM	12-20				Under construction	12-20
China HTR-PM	12-20	50+	never	12-20	Under construction	12-20
Enhanced CANDU 6	21-30	never	50+	never	Basic design	
EPR	12-20	12-20	31-40	12-20	Under construction	12-20

¹ Projecting the success of the various reactor designs in various stages of development by its nature draws conflicting opinions, and this was evident among the group of PNNL experts. The PNNL expert group consisted of staff with experience in nuclear reactors (light water, liquid metal, graphite, etc...) and nonproliferation in an effort to establish a rounded base of expertise to reduce potential bias. Regardless of specific background and expertise, the group recognized that global nuclear infrastructure is biased toward supporting light water reactors; therefore, the prevailing opinion favors light water deployment. There was from the start disagreement over what defined a ‘viable’ reactor concept. Some of the experts believed that a design became viable with the 5th reactor of that design being built; others felt that the design must be accepted globally before it could be considered viable. The projections were made after the April 2011 Fukushima accident, at a time when the impact of the accident on global nuclear energy growth was not clear. The belief that Fukushima would delay the entry of some (in particular Japanese) reactor designs into the market was reflected in the projections of Expert #3 (thus explaining how a design with a currently operational unit could be assigned a “never” categorization).

² The ‘proposed entry decade’ was agreed to as a summary judgment among the four experts. The experts assigned each reactor one of the following projected market entry dates: 1) never; 2) 2012-2020; 3) 2021-2030; 3) 2031-2040; 4) 2041-2050. (The years have been abbreviated in the table – i.e. 12-20 is 2012-2020.)

Table 3.2. Continued

Reactor	Expert #1	Expert #2	Expert #3	Expert #4	Actual Status	Proposed Entry Decade
ESBWR	21-30	21-30	41-50	12-20	NRC Final design approval	21-30
FBNR	never	never	never	Never	Concept	
GA GTMHR	31-40	never	50+	31-40	Detailed design	
GTHTR20-300C	never	41-50	50+	never	Conceptual design	
HP-LWR	never	never	never	never	Concept description	
Hyperion	never	never	50+	50+	Design certification	
IMR	never	50+		31-40	Conceptual design	
IPHWR-220	12-20	12-20	41-50	never	In operation	12-20
IPHWR-700	12-20	12-20	41-50	never	Under construction	12-20
IRIS	never	never	never	never	Detailed design	
JSCWR	never	31-40	50+	never	Conceptual design	
KAMADO-FBR	never	never	never	never	Conceptual design	
KERENA	21-30	50+	41-50	21-30	Basic design	21-30
KLT-40s	12-20	12-20	12-20	never	Under construction	12-20
mPower	12-20	21-30	41-50	21-30	Preliminary design review	21-30
NuScale	12-20	21-30	41-50	21-30	Conceptual design	12-30
PRISM	21-30	21-30	never	never	Basic design	
RMWR	never	31-40	never	50+	Conceptual design	
SMART	21-30	50+	41-50	21-30	Detailed design	21-30
South Africa PBMR	never	never	never	never	Project halted	
VBER-300	21-30	21-30	50+	21-30	Conceptual design	21-30
VVER 640 (V 407)	21-30	21-30	never	31-40	Basic design	21-30
VVER-1000 (V-466 B)	12-20	12-20	31-40	12-20	Under construction	12-20
VVER-1200 (V-392M)	12-20	12-20	31-40	12-20	Under construction	12-20
VVER-1200 (V-491)	12-20	12-20	31-40	12-20	Under construction	12-20
VVER-1500 (V-448)	21-30	21-30	50+	21-30	Detailed design	21-30
VVER-300 (V-478)	21-30	12-20	never	12-20	Detailed design	21-30
VVER-600 (V 498)	21-30	21-30	never	31-40	Conceptual design	21-30

Other more radical reactor types, such as molten salt and pebble bed reactors, are under development, and may ultimately be built commercially. Although these reactors may be ready for commercial operation before 2030, they were not seen to be successful until the latter period of analysis. They are likely to be deployed only after the timeframe considered in this study.

4.0 Conclusions

The widespread construction of a new set of reactor designs could strain the capacity of existing markets to provide adequate redundancy of supply, since new fuel designs could involve new fabrication technologies, and favor new entrants to the market. For economic reasons, and at least initially, building new reactor designs will rely on single-vendor fuel supply. Fuel supply security is in fact an important factor for states to consider in developing nuclear power. The choices a state makes among various reactor technologies may have implications for fuel supply security; these choices also will impact fuel supply security in the evolving nuclear fuel market.

Since most of the reactors anticipated for deployment in our study timeframe are evolutions of current LWR or PHWR designs, the capabilities of existing vendors are sufficient to fuel the advanced reactors that are starting to be built. It is likely that the incremental improvements in fuel burn-up, giving optimum utilization, will be the main change over the next decade.¹ The results of this study suggest that there are numerous reactor designs approaching market readiness. Our review of reactor designs in the development stage indicates those that are most mature and likely to be deployed by 2050 are mostly LWR designs with a few PHWR designs. Exceptions, such as gas reactors and fast reactors, are not likely to be market ready prior to 2050. As a result, LWR fuel will continue to dominate the fuel market through the period of analysis. Fuel manufacturing technology for these designs will be an evolutionary adaptation of existing nuclear fuel manufacturing processes, not processes that are fundamentally different from those currently used. As such, it is less likely to be a disruptive factor in the structure and function of fuel markets, and the existing market equilibrium, which tends to offer a high degree of supply security, is likely to be preserved as a new phase of nuclear power growth begins.

Growth of the global nuclear reactor population and the need for nuclear fuel will be driven by three factors: 1) the large scale expansion of nuclear power in China (also India and South Korea); 2) the entry of new nuclear power consumers; and 3) the replacement of existing reactors. Each of these market segments has important implications for the market penetration of new designs. In China, the high number of new builds, the diversity of power markets, and the indigenization of technology and export plans will favor a diversification of technology.

At the same time, new nuclear consumers—those developing nuclear power for the first time—will tend to be risk averse in terms of choosing advanced, less traditional designs. These countries represent a market with no fixed allegiance to designs, as illustrated in the UAE's purchase of four South Korean reactors.² Finally, the replacement of existing reactors will follow the evolution of existing designs and vendors. This market segment will exhibit design-type inertia as consumers follow a pattern of historical allegiance to specific designs and vendors.

¹ *Current Trends in Nuclear Fuel for Power Reactors*. www.iaea.org/About/Policy/GC/GC51/.../gc51inf-3-att5_en.pdf.

² In December 2009, the UAE and South Korea signed a U.S. \$20 billion contract for construction, commissioning, and fuel loading of four South Korean developed APR-1400 reactors, with another US\$20 billion for operating and maintaining the proposed reactors for a period of 60 years. South Korea's success in the UAE reactor tender solidified its status as a global contender for reactor sales and services, beating out more established Western vendors. The APR-1400 is based on Gen II western technology. Under a licensee relationship with Westinghouse, Korea Hydro and Nuclear Power (updated the Combustion Engineering System 80 design for its own domestic requirements. Korea Hydro and Nuclear Power went on to develop the Korean Standard Nuclear Plant (KNSP), the OPR-1000 design and finally the APR-1400.

Appendix

PNNL Nuclear Fuel Fabrication Market Model

Appendix

PNNL Nuclear Fuel Fabrication Market Model

Table A.1. Expert Consensus on Reactor Startup Decade

Consensus Expert Opinion for Reactor Design Entry into Service				
Large Reactor Designs				
Expected Decade of Entry				
2012-2020	2021-2030	2031-2040	2041-2050	2050+
ABWR	ACR-1000	ABWR-II		
AP-1000	APR-1000			
APR-1400	ESBWR			
APWR	KERENA			
EPR	VBER-300			
IPHWR-220	VVER 640 (V 407)			
IPHWR-700	VVER-1500 (V-448)			
VVER-1000 (V-466 B)	VVER-300 (V-478)			
VVER-1200 (V-392M)	VVER-600 (V 498)			
VVER-1200 (V-491)				
Small Reactor Designs				
Expected Decade of Entry				
2012-2020	2021-2030	2031-2040	2041-2050	2050+
CAREM	mPower			
China HTR-PM	NuScale			
KLT-40S	SMART			

Key: xxxx (y) xxxx = expected MWe total (y) =expected number of units

Table A.2. Belarus

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III/III+ PWR (1000 MWe)	1200 (1)	1200 (1)		1200 (1)
LWR SMR				(1)
Capacity at Beginning of Decade	0	1000	2000	3000
Decline in 2012 Capacity over Decade (Shutdowns)	0	0	0	0
Capacity at Beginning of Decade Less Shutdown Losses	0	1000	2000	3000
UxC Projected Capacity at End of Decade	1000	2000	3000	4000
Required Additional Capacity	1000	1000	1000	1000

Table A.3. Brazil

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III/III+ PWR (1000 MWe)	1350 (1)	4000 (4)	2000 (2)	4000 (4)
LWR SMR			(1-2)	(1-2)
Non-LWR SMR Potential for domestic pebble fuel (FBNR) Small CANDU		(1)		
Capacity at Beginning of Decade	1884	3125	7475	11825
Decline in 2012 Capacity over Decade (Shutdowns)	0	0	0	-609
Capacity at Beginning of Decade Less Shutdown Losses	1884	3125	7475	11216
UxC Projected Capacity at End of Decade	3125	7475	11825	16175
Required Additional Capacity	1241	4350	4350	4959

Table A.4. Bulgaria

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III/III+ PWR (1000 MWe)		3000 (2- 3)	2000 (2)	3000 (3)
LWR SMR			(1)	(4)
Non-LWR SMR			(1)	(2)
Capacity at Beginning of Decade	1906	2917	5928	8939
Decline in 2012 Capacity over Decade (Shutdowns)	0	0	0	0
Capacity at Beginning of Decade Less Shutdown Losses	1906	2917	5928	8939
UxC Projected Capacity at End of Decade	2917	5928	8939	11950
Required Additional Capacity	1011	3011	3011	3011

Table A.5. Canada

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Advanced HWR (1200 MWe)		2400 (2)	2400 (2)	2400 (2)
LWR SMR Something for outposts			(1)	(1)
Non-LWR SMR Small CANDUs (EC-6) Little potential for Small LMFBR like 4S for outpost	1200 (2)			
Capacity at Beginning of Decade	14179	15237	17860	20483
Decline in 2012 Capacity over Decade (Shutdowns)	0	0	0	0
Capacity at Beginning of Decade Less Shutdown Losses	14179	15237	17860	20483
UxC Projected Capacity at End of Decade	15237	17860	20483	23106
Required Additional Capacity	1058	2623	2623	2623

Table A.6. China

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen II/III PWR (1000 MWe)	34,000 (34)	16,000 (16)	30,000 (30)	10,000 (10)
Gen III+ PWR (1500 MWe)	27,000 (18)	45,000 (30)	22,500 (15)	45,000 (30)
Advanced BWR (1000 MWe)			5,000 (5)	10,000 (10)
Advanced HWR (1000 MWe)		2,400 (2)	4000 (4-5)	4000 (4-5)
Gen IV	1,760 (2)	1,760 (2)	(1)	(2)
LWR SMR	(2)	(10)	(5-10)	
Non-LWR SMR Everything (pebble, LMFR, etc)	(1)	(4-8)	(2-4)	
Capacity at Beginning of Decade	11816	70216	133216	196216
Decline in 2012 Capacity over Decade (Shutdowns)	0	0	-298	-1888
Capacity at Beginning of Decade Less Shutdown Losses	11816	70216	132918	194328
UxC Projected Capacity at End of Decade	70216	133216	196216	259216
Required Additional Capacity	58400	63000	63298	64888

Table A.7. Czech Republic

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III LWR (1000 MWe)		2000 (2)	2000 (2)	2000 (2)
LWR SMR				
Non-LWR SMR				
Capacity at Beginning of Decade	0	3703	5703	7703
Decline in 2012 Capacity over Decade (Shutdowns)	0	0	0	0
Capacity at Beginning of Decade Less Shutdown Losses	0	3703	5703	7703
UxC Projected Capacity at End of Decade	3703	5703	7703	9703
Required Additional Capacity	3703	2000	2000	2000

Table A.8. Egypt

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III LWR (1000 MWe)		1000 (1)	1000 (1)	2000 (2)
LWR SMR				
Non-LWR SMR				
Capacity at Beginning of Decade	0	1000	2000	3000
Decline in 2012 Capacity over Decade (Shutdowns)	0	0	0	0
Capacity at Beginning of Decade Less Shutdown Losses	0	1000	2000	3000
UxC Projected Capacity at End of Decade	1000	2000	3000	4000
Required Additional Capacity	1000	1000	1000	1000

Table A.9. Finland

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III/III+ LWR (1500 MWe)	3000 (2)	3000 (2)	3000 (2)	3000 (2)
LWR SMR				
Non-LWR SMR				
Capacity at Beginning of Decade	2752	5896	7496	9096
Decline in 2012 Capacity over Decade (Shutdowns)	0	-1760	-992	0
Capacity at Beginning of Decade Less Shutdown Losses	2752	4136	6504	9096
UxC Projected Capacity at End of Decade	5896	7496	9096	10696
Required Additional Capacity	3144	3360	2592	1600

Table A.10. France

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III/III+ LWR (1500 MWe)	4500 (3)	7500 (5)	15,000 (10)	22,500 (15)
LWR SMR			(2)	
Non-LWR SMR LMFR			(2)	
Gen IV			(1)	(1-2)
Capacity at Beginning of Decade	63130	68140	76480	84820
Decline in 2012 Capacity over Decade (Shutdowns)	0	0	-11680	-19090
Capacity at Beginning of Decade Less Shutdown Losses	63130	68140	64800	65730
UxC Projected Capacity at End of Decade	68140	76480	84820	93160
Required Additional Capacity	5010	8340	20020	27430

Table A.11. Hungary

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III/III+ LWR (1000 MWe)		2000 (2)	2000 (2)	2000 (2)
Non-LWR SMR			(1)	
Capacity at Beginning of Decade	0	1886	4336	6786
Decline in 2012 Capacity over Decade (Shutdowns)	0	0	0	0
Capacity at Beginning of Decade Less Shutdown Losses	0	1886	4336	6786
UxC Projected Capacity at End of Decade	1886	4336	6786	9236
Required Additional Capacity	1886	2450	2450	2450

Table A.12. India

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Domestic HWR (700 MWe)	4900 (7)	5600 (8)	7000 (10)	6000 (8-9)
Gen III/III+ LWR (1000 MWe)	8000 (8)	10,000 (10)	10,000 (10)	10,000 (10)
Gen IV (1000 MWe)	1000 (1)	2000 (2)	5000 (5)	7000 (5-7)
Non-LWR SMR LMFRs	(1)	(4)	(7-9)	
Capacity at Beginning of Decade	4391	18362	35786	53210
Decline in 2012 Capacity over Decade (Shutdowns)	-300	-90	-799	-1414
Capacity at Beginning of Decade Less Shutdown Losses	4091	18272	34987	51796
UxC Projected Capacity at End of Decade	18362	35786	53210	70634
Required Additional Capacity	14271	17514	18223	18838

Table A.13. Mexico

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III/III+ LWR (1000 MWe)		2000 (2)	2000 (2)	3000 (3)
Capacity at Beginning of Decade	0	1598	4248	6898
Decline in 2012 Capacity over Decade (Shutdowns)	0	0	0	0
Capacity at Beginning of Decade Less Shutdown Losses	0	1598	4248	6898
UxC Projected Capacity at End of Decade	1598	4248	6898	9548
Required Additional Capacity	1598	2650	2650	2650

Table A.14. Poland

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III/III+ LWR (1000 MWe)		2000 (2)	3000 (3)	3000 (3)
LWR SMR				
Non-LWR SMR				
Capacity at Beginning of Decade	0	0	3200	6400
Decline in 2012 Capacity over Decade (Shutdowns)	0	0	0	0
Capacity at Beginning of Decade Less Shutdown Losses	0	0	3200	6400
UxC Projected Capacity at End of Decade	0	3200	6400	9600
Required Additional Capacity	0	3200	3200	3200

Table A.15. Russia

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III/III+ PWR (1000-1500 MWe)	8500 (7)	14,000 (11)	15,000 (15)	5000 (5)
Gen IV	800 (1)	2400 (2)	2400 (2)	2400 (2)
LWR SMR	(3)	(2-4)	(5-7)	(10)
Non-LWR SMR	(1)	(1-2)	(2-3)	
Capacity at Beginning of Decade	23643	32854	40933	49012
Decline in 2012 Capacity over Decade (Shutdowns)	0	-7771	-11122	-950
Capacity at Beginning of Decade Less Shutdown Losses	23643	25083	29811	48062
UxC Projected Capacity at End of Decade	32854	40933	49012	57091
Required Additional Capacity	9211	15850	19201	9029

Table A.16. Spain

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III/III+ LWR (1500 MWe)		3000 (2)	4500 (3)	6000 (4)
LWR SMR				
Non-LWR SMR				
Capacity at Beginning of Decade	7560	7560	9454	11904
Decline in 2012 Capacity over Decade (Shutdowns)	0	-446	0	-5050
Capacity at Beginning of Decade Less Shutdown Losses	7560	7114	9454	6854
UxC Projected Capacity at End of Decade	7560	9454	11904	14354
Required Additional Capacity	0	2340	2450	7500

Table A.17. South Africa

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III/III+ LWR (1000 MWe)		2000 (2)	2000 (2)	4000 (4)
LWR SMR				
Non-LWR SMR				
Capacity at Beginning of Decade	1830	3400	6300	9200
Decline in 2012 Capacity over Decade (Shutdowns)	0	0	0	-1830
Capacity at Beginning of Decade Less Shutdown Losses	1830	3400	6300	7370
UxC Projected Capacity at End of Decade	3400	6300	9200	12100
Required Additional Capacity	1570	2900	2900	4730

Table A.18. South Korea

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen II LWR (1000 MWe)	1000 (1)	2000 (2)		
Gen III/III+ LWR (1500 MWe)	6000 (4)	6000 (4)	7500 (5)	7500 (5)
LWR SMR	(1)		(1)	
Non-LWR SMR				
Gen IV				(1)
Capacity at Beginning of Decade	20671	29380	38187	46994
Decline in 2012 Capacity over Decade (Shutdowns)	0	0	-576	0
Capacity at Beginning of Decade Less Shutdown Losses	20671	29380	37611	46994
UxC Projected Capacity at End of Decade	29380	38187	46994	55801
Required Additional Capacity	8709	8807	9383	8807

Table A.19. Taiwan

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III/III+ LWR (1500 MWe)	3000 (2)	3000 (2)	3000 (2)	3000 (2)
LWR SMR				
Non-LWR SMR				
Capacity at Beginning of Decade	5018	7484	10326	13168
Decline in 2012 Capacity over Decade (Shutdowns)	0	-1208	0	-1840
Capacity at Beginning of Decade Less Shutdown Losses	5018	6276	10326	11328
UxC Projected Capacity at End of Decade	7484	10326	13168	16010
Required Additional Capacity	2466	4050	2842	4682

Table A.20. Thailand

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III LWR (1000 MWe)		2000 (2)	1000 (1)	1000 (1)
LWR SMR		(1)	(2-4)	
Non-LWR SMR Pebble		(1)	(1-2)	
Capacity at Beginning of Decade	0	0	2000	4000
Decline in 2012 Capacity over Decade (Shutdowns)	0	0	0	0
Capacity at Beginning of Decade Less Shutdown Losses	0	0	2000	4000
UxC Projected Capacity at End of Decade	0	2000	4000	6000
Required Additional Capacity	0	2000	2000	2000

Table A.21. Turkey

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III/III+ LWR (1500 MWe)	1500 (1)	4500 (3)	6000 (4)	1500 (1)
LWR SMR				
Non-LWR SMR				
Capacity at Beginning of Decade	0	1000	3000	5000
Decline in 2012 Capacity over Decade (Shutdowns)	0	0	0	0
Capacity at Beginning of Decade Less Shutdown Losses	0	1000	3000	5000
UxC Projected Capacity at End of Decade	1000	3000	5000	7000
Required Additional Capacity	1000	2000	2000	2000

Table A.22. United Arab Emirates

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III/III+ LWR (1500 MWe)	5500 (4)		3000 (2)	
LWR SMR				
Non-LWR SMR				
Capacity at Beginning of Decade	0	5360	5360	5360
Decline in 2012 Capacity over Decade (Shutdowns)	0	0	0	0
Capacity at Beginning of Decade Less Shutdown Losses	0	5360	5360	5360
UxC Projected Capacity at End of Decade	5360	5360	5360	5360
Required Additional Capacity	5360	0	0	0

Table A.23. United Kingdom

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III/III+ LWR (1500 MWe)	3000 (2)	4500 (3)	7500 (5)	3000 (3)
LWR SMR				
Non-LWR SMR				
Capacity at Beginning of Decade	9243	12116	14656	17196
Decline in 2012 Capacity over Decade (Shutdowns)	0	-2220	-5835	0
Capacity at Beginning of Decade Less Shutdown Losses	9243	9896	8821	17196
UxC Projected Capacity at End of Decade	12116	14656	17196	19736
Required Additional Capacity	2873	4760	8375	2540

Table A.24. Ukraine

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III/III+ LWR (1000 MWe)	2000 (2)	2000 (2)	1500 (1)	3000 (2)
LWR SMR			(1)	
Non-LWR SMR			(1)	
Capacity at Beginning of Decade	13107	15095	17535	19975
Decline in 2012 Capacity over Decade (Shutdowns)	0	0	-381	-376
Capacity at Beginning of Decade Less Shutdown Losses	13107	15095	17154	19599
UxC Projected Capacity at End of Decade	15095	17535	19975	22415
Required Additional Capacity	1988	2440	2821	2816

Table A.25. United States of America

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III/III+ LWR (1500 MWe)	15,000 (10)	20,000 (20)	22,500 (15)	37,500 (25)
Gen IV			(1)	(1)
LWR SMR		(3-4)	(2-4)	
Non-LWR SMR			(1)	
Capacity at Beginning of Decade	101409	111425	126567	141709
Decline in 2012 Capacity over Decade (Shutdowns)	-2102	-17727	-27538	-4450
Capacity at Beginning of Decade Less Shutdown Losses	99307	93698	99029	137259
UxC Projected Capacity at End of Decade	111425	126567	141709	156851
Required Additional Capacity	12118	32869	42680	19592

Table A.26. Vietnam

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III/III+ LWR (1000 MWe)	1000 (1)	2000 (2)	2000 (2)	2000 (2)
LWR SMR			(1)	
Non-LWR SMR Pebble			(1)	
Capacity at Beginning of Decade	0	1000	3000	5000
Decline in 2012 Capacity over Decade (Shutdowns)	0	0	0	0
Capacity at Beginning of Decade Less Shutdown Losses	0	1000	3000	5000
UxC Projected Capacity at End of Decade	1000	3000	5000	7000
Required Additional Capacity	1000	2000	2000	2000

Sensitivities**Table A.27. India**

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Domestic HWR (700 MWe)	(4)	(3-4)	(3-4)	(8-9)
Gen III/III+ LWR (1000 MWe)	(2)	(2-4)	(4-6)	(4-6)
Gen IV (1000 MWe)				
Non-LWR SMR LMFRs	(1)	(1-2)	(2-3)	(2-3)
Capacity at Beginning of Decade	4391	18362	35786	53210
Decline in 2012 Capacity over Decade (Shutdowns)	-300	-90	-799	-1414
Capacity at Beginning of Decade Less Shutdown Losses	4091	18272	34987	51796
UxC Projected Capacity at End of Decade	18362	35786	53210	70634
Required Additional Capacity	14271	17514	18223	18838

Table A.28. China

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen II/III PWR (1000 MWe)	34,000 (34)	16,000 (16)	(10)	(10-15)
Gen III+ PWR (1500 MWe)	27,000 (18)	45,000 (30)	(10)	(10-15)
Advanced BWR (1000 MWe)			(5)	(10)
Advanced HWR (1000 MWe)		2,400 (2)	4000 (4-5)	4000 (4-5)
Gen IV	1,760 (2)	1,760 (2)	(1)	(2)
LWR SMR	(2)	(10)	(5-10)	
Non-LWR SMR Everything (pebble, LMFR, etc)	(1)	(4-8)	(2-4)	
Capacity at Beginning of Decade	11816	70216	133216	196216
Decline in 2012 Capacity over Decade (Shutdowns)	0	0	-298	-1888
Capacity at Beginning of Decade Less Shutdown Losses	11816	70216	132918	194328
UxC Projected Capacity at End of Decade	70216	133216	196216	259216
Required Additional Capacity	58400	63000	63298	64888

Table A.29. Russia

Unit	Decade			
	2012-20	2021-30	2031-40	2041-50
Gen III/III+ PWR (1000-1500 MWe)	8500 (7)	(5-7)	(5-7)	(5-7)
Gen IV	800 (1)	2400 (2)	2400 (2)	2400 (2)
LWR SMR	(3)	(2-4)	(2-3)	(2-3)
Non-LWR SMR	(1)	(1-2)	(2-3)	
Capacity at Beginning of Decade	23643	32854	40933	49012
Decline in 2012 Capacity over Decade (Shutdowns)	0	-7771	-11122	-950
Capacity at Beginning of Decade Less Shutdown Losses	23643	25083	29811	48062
UxC Projected Capacity at End of Decade	32854	40933	49012	57091
Required Additional Capacity	9211	15850	19201	9029



Pacific Northwest
NATIONAL LABORATORY

*Proudly Operated by **Battelle** Since 1965*

902 Battelle Boulevard
P.O. Box 999
Richland, WA 99352
1-888-375-PNNL (7665)
www.pnnl.gov



U.S. DEPARTMENT OF
ENERGY