



US006914528B2

(12) **United States Patent**  
**Pratt et al.**

(10) **Patent No.:** **US 6,914,528 B2**  
(45) **Date of Patent:** **Jul. 5, 2005**

(54) **WIRELESS COMMUNICATION SYSTEMS, RADIO FREQUENCY IDENTIFICATION DEVICES, METHODS OF ENHANCING A COMMUNICATIONS RANGE OF A RADIO FREQUENCY IDENTIFICATION DEVICE, AND WIRELESS COMMUNICATION METHODS**

5,850,181 A	*	12/1998	Heinrich et al. ....	340/572.1
5,850,187 A		12/1998	Carrender et al. ....	340/10.6
5,883,368 A	*	3/1999	Jeong .....	219/761
5,883,582 A		3/1999	Bowers et al. ....	340/825.54
5,986,570 A		11/1999	Black et al. ....	340/825.54
6,054,925 A	*	4/2000	Proctor et al. ....	340/572.7

(Continued)

(75) Inventors: **Richard M. Pratt**, Richland, WA (US);  
**Steven B. Thompson**, Richland, WA (US)

**OTHER PUBLICATIONS**

U.S. Appl. No. 09/589,001, filed Jun. 6, 2000, Gilbert et al.  
U.S. Appl. No. 09/802,408, filed Mar. 9, 2001, Gilbert et al.

(73) Assignee: **Battelle Memorial Institute**, Richland, WA (US)

(Continued)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

*Primary Examiner*—Daniel Wu  
*Assistant Examiner*—Son Tang  
(74) *Attorney, Agent, or Firm*—Wells St. John, P.S.

(21) Appl. No.: **10/263,997**

(57) **ABSTRACT**

(22) Filed: **Oct. 2, 2002**

Wireless communication systems, radio frequency identification devices, methods of enhancing a communications range of a radio frequency identification device, and wireless communication methods are described. According to one aspect, a wireless communication system includes a reader configured to output a first wireless communication signal and to receive a second wireless communication signal comprising a backscatter signal and a remote communication device configured to receive the first wireless communication signal and to communicate the second wireless communication signal comprising the backscatter signal, wherein the remote communication device includes an antenna configured to provide electrical energy, communication circuitry configured to process the received first wireless communication signal and to generate a modulation signal to communicate the backscatter signal and a plurality of power conditioning circuits coupled in series intermediate the antenna and the communication circuitry and individually configured to enhance at least one electrical characteristic of the electrical energy from the antenna.

(65) **Prior Publication Data**

US 2004/0070500 A1 Apr. 15, 2004

(51) **Int. Cl.**<sup>7</sup> ..... **G08B 13/14**

(52) **U.S. Cl.** ..... **340/572.1; 340/658**


(58) **Field of Search** ..... 340/572.1, 572.2, 340/572.4, 572.5, 572.7

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

4,075,632 A	*	2/1978	Baldwin et al. ....	342/51
4,352,183 A		9/1982	Davis et al. ....	371/33
4,360,810 A		11/1982	Landt .....	343/6.5
4,786,907 A	*	11/1988	Koelle .....	342/51
4,857,893 A	*	8/1989	Carroll .....	340/572.7
5,530,702 A		6/1996	Palmer et al. ....	370/85.3
5,550,547 A		8/1996	Chan et al. ....	342/42
5,606,323 A	*	2/1997	Heinrich et al. ....	340/10.34
5,731,691 A	*	3/1998	Noto .....	323/220

**20 Claims, 2 Drawing Sheets**

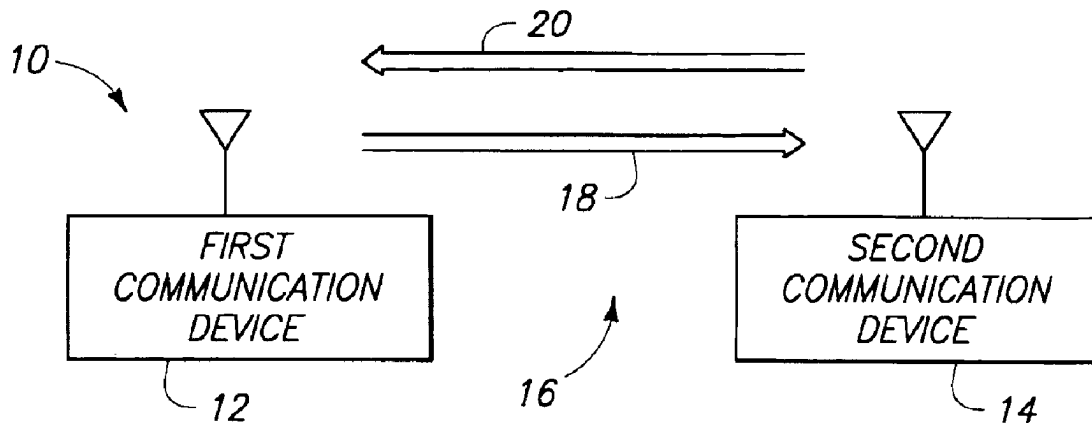

## U.S. PATENT DOCUMENTS

6,091,319	A	7/2000	Black et al. ....	340/10.2
6,130,623	A	10/2000	MacLellan et al. ....	340/825.54
6,140,924	A	* 10/2000	Chia et al. ....	340/572.5
6,177,861	B1	1/2001	MacLellan et al. ....	340/10.1
6,202,927	B1	* 3/2001	Bashan et al. ....	235/451
6,243,013	B1	6/2001	Duan et al. ....	340/572.7
6,265,962	B1	7/2001	Black et al. ....	340/10.2
6,307,848	B1	10/2001	Wood, Jr. ....	370/329
6,366,260	B1	4/2002	Carrender ....	343/866
6,400,274	B1	* 6/2002	Duan et al. ....	340/572.7
6,515,919	B1	* 2/2003	Lee ....	365/192
6,590,498	B2	* 7/2003	Helms ....	340/572.7
6,615,074	B2	* 9/2003	Mickle et al. ....	600/509
6,738,025	B2	* 5/2004	Carrender ....	343/860

## OTHER PUBLICATIONS

U.S. Appl. No. 09/833,465, filed Apr. 11, 2001, Carrender et al.

U.S. Appl. No. 09/588,997, filed Jun. 6, 2000, Gilbert et al.

U.S. Appl. No. 09/589,000, filed Jun. 6, 2000, Gilbert et al.

U.S. Appl. No. 09/588,998, filed Jun. 6, 2000, Carrender et al.

U.S. Appl. No. 09/797,539, filed Feb. 28, 2001, Carrender.

U.S. Appl. No. 09/833,391, filed Apr. 11, 2001, Carrender. Finkenzeller, Klaus, "Radio-Frequency identification Fundamentals and Applications", *RFID Handbook*, Chapter 8, pp. 151-158 (Jan. 2002).

International Standard, ISO/IEC, "Part 2: Mechanisms Using Symmetry Encipherment Algorithms", *Information Technology—Security Techniques—Entity Authentication*, #ISO/IEC 9798-2:1999(E), 2nd Ed., pp 1-11 (Jul. 15, 1999).

Agilent Technologies, "Schottky Diode Voltage Doubler, Application Note 956-4", 2 pages (1999).

U.S. Patent Appn. filed Oct. 2, 2002, entitled "RFID System and Method Including Tag ID Compression", Michael A. Hughes and Richard M. Pratt.

U.S. Patent Appn. filed Oct. 2, 2002, entitled "Radio Frequency Identification Device Communications Systems, Wireless Communication Devices, Wireless Communication Systems, Backscatter Communication Methods, Radio Frequency Identification Device Communication Methods and a Radio Frequency Identification Device", by Michael A. Hughes and Richard M. Pratt.

U.S. Patent Appn. filed Oct. 2, 2002, entitled "Wireless Communications Devices, Methods of Processing a Wireless Communication Signal, Wireless Communication Synchronization Methods and a Radio Frequency Identification Device Communication Method", by Richard M. Pratt and Steven B. Thompson.

U.S. Patent Appn. filed Oct. 2, 2002, entitled "Wireless Communications Systems, Radio Frequency Identification Devices, Wireless Communications Methods, and Radio Frequency Identification Device Communications Methods", by Richard M. Pratt and Steven B. Thompson.




U.S. Patent Appn. filed Oct. 2, 2002, entitled "A Challenge-Based Tag Authentication Model", by Michael A. Hughes and Richard M. Pratt.

U.S. Patent Appn. filed Oct. 2, 2002, entitled "Method of Simultaneously Reading Multiple Radio Frequency Tags, RF Tag, and RF Reader", by Emre Ertin, Richard M. Pratt, Michael A. Hughes, Kevin L. Priddy and Wayne M. Lechelt.

U.S. Patent Appn. filed Oct. 2, 2002, entitled "Radio Frequency Identification Devices, Backscatter Communication Device Wake-Up Methods, Communication Device Wake-Up Methods and a Radio Frequency Identification Device Wake-Up Method", by Richard M. Pratt and Michael A. Hughes.

U.S. Patent Appn. filed Oct. 2, 2002, entitled "System and Method to Identify Multiple RFID Tags", by Michael A. Hughes and Richard M. Pratt.

\* cited by examiner

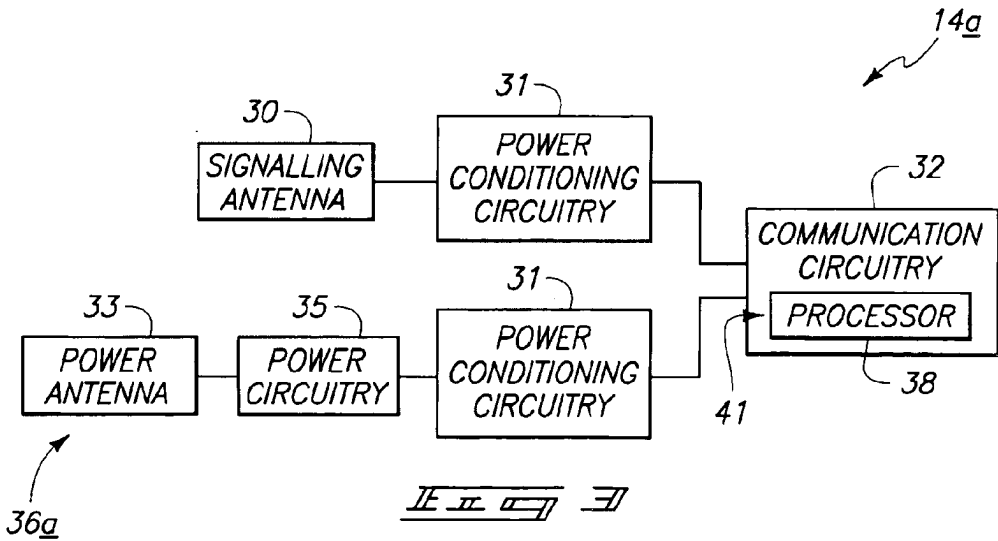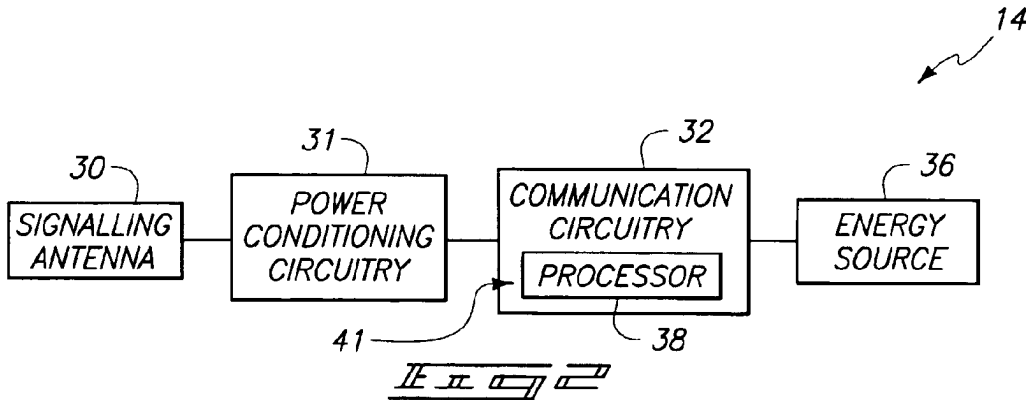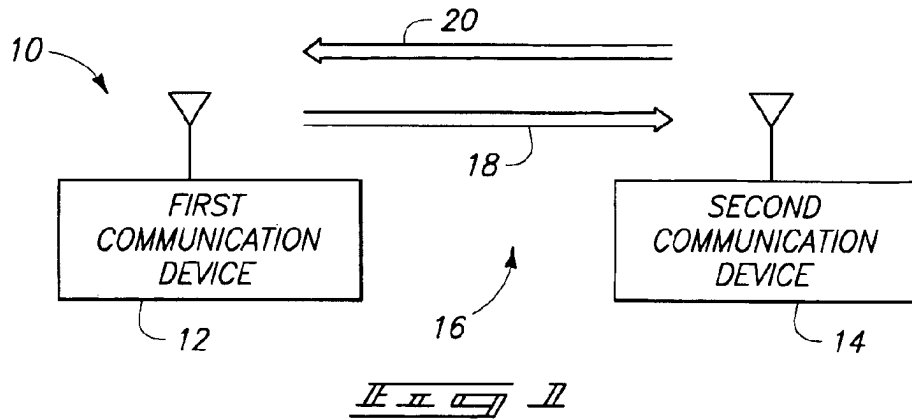

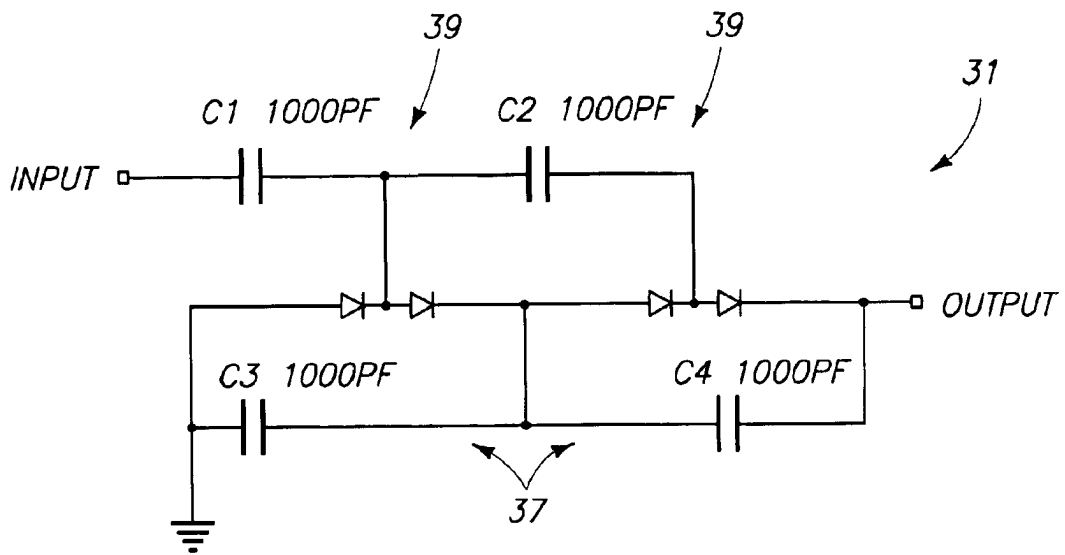


FIG. 2

1

**WIRELESS COMMUNICATION SYSTEMS,  
RADIO FREQUENCY IDENTIFICATION  
DEVICES, METHODS OF ENHANCING A  
COMMUNICATIONS RANGE OF A RADIO  
FREQUENCY IDENTIFICATION DEVICE,  
AND WIRELESS COMMUNICATION  
METHODS**

**TECHNICAL FIELD**

The present invention relates to wireless communication systems, radio frequency identification devices, methods of enhancing a communications range of a radio frequency identification device, and wireless communication methods.

**BACKGROUND OF THE INVENTION**

Remote wireless communications may be implemented using radio frequency (RF) technology. Exemplary applications utilizing RF technology include identification applications including, for example, locating, identifying, and tracking of objects. Radio frequency identification device (RFID) systems may be utilized to facilitate identification operations. For example, one device may be arranged to output and receive radio frequency communications and one or more remotely located device may be configured to communicate with the one device using radio frequency communications. The remotely located device(s) may be referred to as a tag, while the other device may be referred to as a reader. Some advantages of radio frequency communications of exemplary radio frequency identification device systems include an ability to communicate without contact or line-of-sight, at relatively fast speeds, and with robust communication channels.

A communications range for reading passive and semi-passive radio frequency identification devices may be limited by circuitry that uses interrogation beam power to detect the presence of interrogation signals. Aspects of the present invention including methodologies and structural arrangements provide robust wireless communications to enhance communications between remotely located wireless communication devices.

**BRIEF DESCRIPTION OF THE DRAWINGS**

Preferred embodiments of the invention are described below with reference to the following accompanying drawings.

FIG. 1 is a functional block diagram of an exemplary wireless communication system.

FIG. 2 is a functional block diagram of components of an exemplary configuration of a wireless communication device of the system.

FIG. 3 is a functional block diagram of components of another possible exemplary arrangement of the wireless communication device shown in FIG. 2.

FIG. 4 is a schematic representation of exemplary power conditioning circuitry of the devices of FIGS. 2 and 3.

**DETAILED DESCRIPTION OF THE  
PREFERRED EMBODIMENTS**

Attention is directed to the following commonly assigned applications, which are incorporated herein by reference:

U.S. patent application Ser. No. 10/263,826 entitled "Radio Frequency Identification Device Communications Systems, Wireless Communication Devices, Backscatter

2

Communication Methods, Radio Frequency Identification Device Communication Methods, and a Radio Frequency Identification Device," by inventors Mike A. Hughes and Richard M. Pratt; U.S. patent application Ser. No. 10/263,809, entitled "Method of Simultaneously Reading Multiple Radio Frequency Tags, RF Tag, and RF Reader," by inventors Emre Ertin, Richard M. Pratt, Mike A. Hughes, Kevin L. Priddy, and Wayne M. Lechelt; U.S. patent application Ser. No. 10/263,873, entitled "RFID System and Method Including Tag ID Compression," by inventors Richard M. Pratt and Mike A. Hughes; U.S. patent application Ser. No. 10/264,078, entitled "System and Method to Identify Multiple RF Tags," by inventors Mike A. Hughes and Richard M. Pratt; U.S. patent application Ser. No. 10/263,940, entitled "Radio Frequency Identification Devices, Backscatter Communication Device Wake-up Methods, Communication Device Wake-up Methods and A Radio Frequency Identification Device Wake-up Method," by inventors Richard Pratt and Mike Hughes; U.S. patent application Ser. No. 10/263,670, entitled "Wireless Communications Devices, Methods of Processing a Wireless Communication Signal, Wireless Communication Synchronization Methods and a Radio Frequency Identification Device Communication Method," by inventors Richard M. Pratt and Steven B. Thompson; U.S. patent application Ser. No. 10/263,656, entitled "Wireless Communications Systems, Radio Frequency Identification Devices, Wireless Communications Methods, and Radio Frequency Identification Device Communications Methods," by inventors Richard Pratt and Steven B. Thompson; U.S. patent application Ser. No. 10/263,635, entitled "A Challenged-Based Tag Authentication Model," by inventors Mike A. Hughes and Richard M. Pratt; U.S. patent application Ser. No. 09/589,001, filed Jun. 6, 2000, entitled "Remote Communication System and Method," by inventors R. W. Gilbert, G. A. Anderson, K. D. Steele, and C. L. Carrender; U.S. patent application Ser. No. 09/802,408; filed Mar. 9, 2001, entitled "Multi-Level RF Identification System," by inventors R. W. Gilbert, G. A. Anderson, and K. D. Steele; U.S. patent application Ser. No. 09/833,465, filed Apr. 11, 2001, entitled "System and Method for Controlling Remote Device," by inventors C. L. Carrender, R. W. Gilbert, J. W. Scott, and D. Clark; U.S. patent application Ser. No. 09/588,997, filed Jun. 6, 2000, entitled "Phase Modulation in RF Tag," by inventors R. W. Gilbert and C. L. Carrender; U.S. patent application Ser. No. 09/589,000, filed Jun. 6, 2000, entitled "Multi-Frequency Communication System and Method," by inventors R. W. Gilbert and C. L. Carrender; U.S. patent application Ser. No. 09/588,998; filed Jun. 6, 2000, entitled "Distance/Ranging by Determination of RF Phase Delta," by inventor C. L. Carrender; U.S. patent application Ser. No. 09/797,539, filed Feb. 28, 2001, entitled "Antenna Matching Circuit," by inventor C. L. Carrender; U.S. patent application Ser. No. 09/833,391, filed Apr. 11, 2001, entitled "Frequency Hopping RFID Reader," by inventor C. L. Carrender.

According to one aspect, a wireless communication system comprises a reader configured to output a first wireless communication signal and to receive a second wireless communication signal comprising a backscatter signal and a remote communication device configured to receive the first wireless communication signal and to communicate the second wireless communication signal comprising the backscatter signal, wherein the remote communication device comprises an antenna configured to provide electrical energy, communication circuitry configured to process the received first wireless communication signal and to generate a modulation signal to communicate the backscatter signal

3

and a plurality of power conditioning circuits coupled in series intermediate the antenna and the communication circuitry and individually configured to enhance at least one electrical characteristic of the electrical energy from the antenna.

According to another aspect, a radio frequency identification device comprises an antenna configured to provide electrical energy corresponding to received electromagnetic energy comprising a first wireless communication signal from a reader, a plurality of voltage doubler circuits individually configured to increase a voltage of the electrical energy from the antenna and communication circuitry coupled with the voltage doubler circuits and configured to receive the electrical energy of the increased voltage from the voltage doubler circuits, wherein the communication circuitry is configured to process the electrical energy of the increased voltage to process the first wireless communication signal.

According to an additional aspect, a method of enhancing a communications range of a radio frequency identification device comprising providing a radio frequency identification device including a first voltage doubler circuit and a second voltage doubler circuit, receiving electromagnetic energy using an antenna of the radio frequency identification device, providing electrical energy of a first voltage using the antenna of the radio frequency identification device and responsive to the received electromagnetic energy, increasing a voltage of the electrical energy to a second voltage greater than the first voltage using the first voltage doubler circuit, increasing the voltage of the electrical energy to a third voltage greater than the second voltage using the second voltage doubler circuit coupled in series with the first voltage doubler circuit and implementing radio frequency identification device communications using the radio frequency identification device and the electrical energy of the third voltage.

Yet another aspect provides a wireless communication method comprising providing a first device and a second device individually configured to communicate wireless communication signals, outputting a first wireless communication signal using the first device, first increasing an electrical characteristic of the first wireless communication signal using a first power conditioning circuit of the second device, second increasing the electrical characteristic of the first wireless communication signal using a second power conditioning circuit of the second device after the first increasing, processing the first wireless communication signal using the second device after the first and second increasing and backscatter modulating radio frequency energy using the second device responsive to the processing and to communicate a second wireless communication signal to the first device.

Referring to FIG. 1, an exemplary wireless communication system **10** is depicted. The exemplary system **10** includes a first communication device **12** and one or more second communication device **14**. Only one device **14** is shown in the exemplary arrangement of FIG. 1. In other applications, a plurality of devices **14** may be utilized for communications.

First and second communication devices **12**, **14** are arranged to implement wireless communications **16** in the depicted exemplary embodiment. Possible wireless communications **16** include first wireless communication signals **18** communicated from first communication device **12** and second wireless communication signals **20** communicated from the one or more second communication device **14**.

4

Wireless communication signals include signals (e.g., electromagnetic) which at some point in time are communicated over a wireless medium but may also be communicated over an electrical conductor (e.g., electrical signals within devices **12**, **14**) at other moments in time.

System **10** is provided to illustrate exemplary structural and method aspects of the present invention. In one possible implementation, system **10** is implemented as a radio frequency identification device (RFID) communications system. For example, in such an arrangement, first communication device **12** may be implemented as a reader, and second communication devices **14** may be referred to as remote communication devices and may be implemented as transponders, such as RFID tags. In such an implementation, devices **14** may be associated with respective articles to implement identification operations.

In one configuration, first wireless communication signals **18** may be referred to as forward link wireless signals and second wireless communication signals **20** may be referred to as return link wireless signals communicated responsive to forward link wireless signals **18**. Exemplary wireless communications **16** include electromagnetic energy or signals, such as radio frequency signals. Alternatively, wireless communications **16** may comprise infrared signals, acoustic signals, or any other appropriate signals capable of being communicated between devices **12**, **14**.

Referring to FIG. 2, an exemplary arrangement of communication device **14** comprising a semi-passive device is shown. Another possible exemplary arrangement of the second communication device **14** configured as a passive device is illustrated in FIG. 3 with respect to reference numeral **14a**. Like references herein may refer to like components with any significant differences therebetween being represented by a suffix, such as "a".

Referring again to FIG. 2, the exemplary configuration of device **14** includes a signaling antenna **30**, power conditioning circuitry **31**, communication circuitry **32**, and an energy source **36**.

Signaling antenna **30** is arranged to receive electromagnetic energy of signals **18** and to output electromagnetic energy of signals **20**. Signaling antenna **30** may comprise a single antenna for communication of signals **18**, **20**, or include a plurality of respective dedicated antennas for communication of signals **18**, **20**.

Power conditioning circuitry **31** operates to provide device **14** having increased sensitivity according to aspects of the present invention. Power conditioning circuitry **31** operates to increase a communications range of system **10** for a given transmission power, or to enable communications of a common communications range at a reduced transmission power.

As is discussed in detail below, power conditioning circuitry **31** is arranged to increase an electrical characteristic of electrical energy corresponding to received electromagnetic energy to increase the sensitivity of detection circuitry of device **14**. Exemplary detection circuitry including a comparator is discussed in a U.S. patent application entitled "Radio Frequency Identification Devices, Backscatter Communication Device Wake-up Methods, Communication Device Wake-up Methods and A Radio Frequency Identification Device Wake-up Method," naming Richard Pratt and Mike Hughes as inventors, having Ser. No. 10/263,940, filed the same day as the present application, and incorporated herein by reference.

Communication circuitry **32** includes processing circuitry **41** according to at least one configuration. Processing cir-

cuitry **41** is arranged to control operations of device **14** including processing received signals and formulating outputted signals. Exemplary processing circuitry **41** may include a processor **38** such as a model number MSP430F1121 available from Texas Instruments, Inc. Other processor configurations or processing circuitry configurations (e.g., embedded circuitry) are possible.

Energy source **36** may comprise one of a plurality of possible configurations corresponding to the implementation of communication device **14**. In semi-passive implementations, such as the arrangement of FIG. 2, energy source **36** may be implemented as a battery utilized to provide operational energy (e.g., electrical energy) to communication circuitry **32** to implement processing of wireless signals **18**. Electromagnetic energy received within device **14** is utilized to generate wireless signals **20** in one arrangement. As discussed below with reference to FIG. 3 for passive implementations of device **14a**, received electromagnetic energy is utilized to provide operational energy to components of device **14a** as well as to communicate wireless signals **20**.

Processor **38** of communication circuitry **32** is configured to execute instructions to control communication operations of device **14**. For example, processor **38** of communication circuitry **32** is arranged to process received wireless communication signals **18** and to control communication of outputted wireless communication signals **20**. In one arrangement, processor **38** is configured to control antenna **30** to generate wireless communication signals **20** using backscatter modulation communication techniques. Communication circuitry **32** may control outputting of wireless communication signals **20** using backscatter modulation according to at least one radio frequency identification device communications protocol. In such an arrangement, wireless communication signals **20** are generated by backscatter modulating electromagnetic energy present at device **14**. The electromagnetic energy which is backscatter modulated may be generated by device **12** (e.g., a continuous wave signal outputted from device **12**, communications from device **12** to other devices **14**, etc.) or by other sources.

Communication circuitry **32** controls electrical characteristics of antenna **30** according to one backscatter embodiment. Processor **38** may provide a modulation signal to alter electrical characteristics of antenna **30** wherein electromagnetic energy is selectively reflected by antenna **30**. Antenna **30** selectively reflects electromagnetic energy creating wireless communication signals **20** responsive to the modulation signal according to one exemplary backscatter implementation.

The modulation signal may be encoded with information to be communicated from device **14** to device **12**. Exemplary information includes identification information, such as a unique serial number which identifies the communicating device **14**, or any other desired information to be communicated. According to one exemplary arrangement, communication devices **12**, **14** are configured to communicate wireless signals **18**, **20** using on/off key (OOK) modulation, such as a FMO or FMI encoding scheme. Other types of modulation or schemes may be utilized to communicate information between devices **12**, **14**.

Communication circuitry **32** arranged to implement RFID communications may be referred to as radio frequency identification device communication circuitry. Communication circuitry **32** may be operable to control communication of wireless signals **20** responsive to processing of one or more wireless signal **18**. For example, circuitry **32** may implement transponder communications in one exemplary embodiment.

Processing of received signals **18** may include extracting an identifier from the wireless signals **18** (e.g., an identifier of the communicating device **12** and/or identifying device **14**) and also include processing of commands within signals **18**. Responsive to processing, device **14** may selectively output or communicate wireless signals **20** including identification information or other desired requested information from first communication device **12**.

Referring to FIG. 3, an exemplary passive configuration of a communication device is described with respect to reference **14a**. As illustrated, the depicted communication device **14a** includes signaling antenna **30**, power conditioning circuitry **31** coupled with antenna **30**, and communication circuitry **32**.

In addition, device **14a** includes an energy source **36a** configured to derive operational energy from received electromagnetic energy. The exemplary energy source **36a** of FIG. 3 includes a power antenna **33**, power circuitry **35**, and power conditioning circuitry **31** configured to provide operational energy to communication circuitry **32** including processor **38**.

Power antenna **33** is arranged and tuned to receive electromagnetic energy and to provide electrical energy. For example, power antenna **33** may be tuned to a communication frequency of device **12** in implementations wherein device **14** is to provide electrical energy from communications of device **12** (e.g., 2.45 GHz continuous wave signal).

Power circuitry **35** is arranged to provide operational energy from electrical energy provided by antenna **33**. Exemplary configurations of power circuitry **35** are described as power section circuitry in a U.S. patent application Ser. No. 09/797,539, entitled "Antenna Matching Circuit," having docket number 12630-B; and as a power circuit in a U.S. patent application Ser. No. 09/589,001, entitled "Remote Communication System and Method," having docket number E-1674, the teachings of both applications are incorporated herein by reference. Other configurations of power circuitry **35** are possible.

In one aspect, power conditioning circuitry **31** is operable to increase or enhance an electrical characteristic of operational energy from power circuitry **35** prior to utilization within communication circuitry **32** and processor **38**. Further details of exemplary circuitry **31** coupled with power circuitry **35** are discussed in detail below.

Some other passive implementations of device **14a** may utilize a single antenna for receiving electromagnetic energy corresponding to first wireless communication signals **18** and also for providing operational energy. For example, antenna **33** could be omitted and antenna **30** could be coupled with power circuitry shown in FIG. 3.

Aspects of the invention for increasing sensitivity of detection circuitry of device **14** are described below. Increasing the sensitivity provides a greater communications range for a given transmission power, or enables communications within a given communications range using less transmission power depending upon the particular desired application.

A transmitter of device **12** radiates energy using a transmit antenna in radio frequency implementations. This energy radiates at the speed of light from the antenna outward in all directions. At any distance from device **12**, the energy per square unit is equal to the radiated energy (times the antenna gain) divided over the surface area of a sphere, which has a radius equal to the range at which the density is being measured. In mathematical terms:

$$\text{Energy density (W/m}^2\text{)} = \frac{\text{Transmitted energy} * \text{Antenna gain}}{4\pi * \text{range (m)} * \text{range (m)}} \quad (1)$$

Only a portion of the transmitted energy reaches device **14**, **14a** for conversion into electrical energy. A term called effective aperture makes this efficiency conversion. In mathematical terms such may be represented as:

$$P_r = \text{Energy received (W)} = \text{Energy density at range (W/m}^2\text{)} * \text{Effective aperture (m}^2\text{)} \quad (2)$$

The appropriate antenna(s) of device **14**, **14a** collects this energy which may be rectified to produce operational energy (e.g., operating voltage) and/or communication signals for passive devices **14a**, or communication signals for semi-passive devices **14**. The effective aperture of device **14**, **14a** is a function of the gain of the antenna and the square of the operating wavelength (speed of light/operating frequency). The operating wavelength defines the antenna length.

The actual antenna gains and cable losses are considered when calculating the signal power  $P_r$  available at the receiver input of communication circuitry **32**:

$$P_r = P_t - L_t + G_t - L_p + G_r - L_r \quad (3)$$

where  $P_t$ =transmitter power output (dBm or dBW, same units as  $P_r$ )

$L_p$ =free space path loss between isotropic antennas (dB)

$G_t$ =transmit antenna gain (dBi)

$G_r$ =receive antenna gain (dBi)

$L_t$ =transmission line loss between transmitter and transmit antenna (dB)

$L_r$ =transmission line loss between receive antenna and receiver input (dB)

When the sensitivity of device **14**, **14a** is increased, the device requires less power to detect an input signal. Since all the other factors remain constant, free space path loss between antennas  $L_p$ , can decrease if sensitivity is increased. If the sensitivity is increased by 12 dBv (6 dBm—referenced to 1 mW), then a 100% range improvement is obtained as shown in Equations (4) and (5).

$$L_p = \text{Path Loss (dBm)} = 32.4 + 20 * \log(f) + 20 * \log(d) \quad (4)$$

$$L_p = \text{Path Loss (dBm)} = 6 \text{ dBm} = 20 * \log(d) \quad (5)$$

where  $f$  is frequency in MHz and  $d$  is distance in kilometers.

Aspects of the present invention provide exemplary methods and structures for implementing improvements in a communications range of system **10** or, put another way, enabling communications of a common communications range with reduced transmission power. According to one aspect, sensitivity of devices **14**, **14a** is increased using power conditioning circuitry **31**.

Power conditioning circuitry **31** is arranged to enhance or increase at least one electrical characteristic of electrical energy from a respective antenna **30**, **33** corresponding to received electromagnetic energy according to at least one aspect. As discussed further below, exemplary power conditioning circuitry **31** comprises a plurality of power conditioning circuits (e.g., reference **39** in FIG. **4**) coupled in series and individually configured to increase the at least one electrical characteristic of the electrical energy. In one aspect, the power conditioning circuits are individually configured to increase the voltage of the electrical energy. Power conditioning circuitry **31** may include at least two circuits **39** and perhaps more depending upon the particular application or implementation of system **10**.

Accordingly, for configurations wherein circuitry **31** is coupled with signaling antenna **30**, circuitry **31** is arranged to increase an electrical characteristic of electrical energy corresponding to received first wireless communication signals **18**. For passive configurations, circuitry **31** may increase an electrical characteristic of operational energy used within device **14a**.

The power conditioning circuits **39** coupled in series within circuitry **31** are individually implemented as a voltage doubler circuit in one implementation. Referring to FIG. **4**, exemplary configurations of power conditioning circuits **39** implemented as voltage doubler circuits **37** are shown. The voltage doubler circuits **37** may comprise full-wave rectifier circuit arrangements as shown in the exemplary embodiment depicted in FIG. **4**. Other configurations of power conditioning circuits **39** are possible.

The depicted input of circuitry **31** of FIG. **4** may be coupled with signaling antenna **30** for conditioning of received signals **18**, or with power antenna **33** for conditioning of electrical energy utilized as operational energy for device **14a**. The output of circuitry **31** coupled with an antenna **30** may be coupled with detection circuitry comprising, for example, a comparator as discussed in the U.S. patent application Ser. No. 10/263,940 having incorporated by reference above. The circuit **37** coupled with the input increases the voltage of the received electrical energy and the circuit **37** coupled with the output increases the voltage of the electrical energy outputted from the circuit **37** coupled with the input.

In arrangements wherein circuitry **31** is coupled with signaling antenna **30**, the outputted electrical energy from circuitry **31** having the increased voltage may be processed for example by processor **38** of communication circuitry **32** enabling processing of communications from device **12**. In arrangements wherein circuitry **31** is coupled with power antenna **33**, the outputted electrical energy having the increased voltage is utilized as operational energy within device **14** (e.g., power for communication circuitry **32** including processor **38**).

As mentioned above, at least two and perhaps additional power conditioning circuits **39** may be coupled in series to provide individual ones of circuitry **31**. For configurations wherein the power conditioning circuits **39** comprise voltage doubler circuits **37**, the number of possible doublers which may be utilized is function of bandwidth reduction caused by the individual doublers, as well as available source current. Provision of circuitry **31** including two pairs of voltage doubler circuits (i.e., four voltage doubler circuits **37** in series) increases the output voltage by 12 dBv and reduces transmit power requirements by 6 dBm. Such enables the communications range to double if the receiving sensitivity of device **14**, **14a** is the limiting factor. The reduction in transmit power was verified by experimental measurements and the extension of the range calculation was verified by calculation.

As described herein, the power conditioning circuitry **31** may be utilized for passive and semi-passive device configurations. The power conditioning circuitry **31** may be used as an input signal amplifier and/or amplifying an RF beam signal for use in internal power sources or supplies of the devices **14**, **14a**.

In compliance with the statute, the invention has been described in language more or less specific as to structural and methodical features. It is to be understood, however, that the invention is not limited to the specific features shown and described, since the means herein disclosed comprise preferred forms of putting the invention into effect. The



9

invention is, therefore, claimed in any of its forms or modifications within the proper scope of the appended claims appropriately interpreted in accordance with the doctrine of equivalents.

What is claimed:

1. A wireless communication system comprising:

a reader configured to output a first wireless communication signal and to receive a second wireless communication signal comprising a backscatter signal; and  
a remote communication device configured to receive the first wireless communication signal and to communicate the second wireless communication signal comprising the backscatter signal;

wherein the remote communication device comprises:

a signaling antenna configured to provide electrical energy;  
communication circuitry configured to process the received first wireless communication signal and to generate a modulation signal to communicate the backscatter signal;  
a plurality of first power conditioning circuits coupled in series intermediate the signaling antenna and the communication circuitry and individually configured to enhance at least one electrical characteristic of the electrical energy from the signaling antenna;

wherein the remote communication device further comprises an energy source configured to provide operational energy to the communication circuitry using electromagnetic energy received within the remote communication device, and wherein the energy source comprises:

a power antenna configured to provide the operational energy derived from the electromagnetic energy; and  
a plurality of second power conditioning circuits coupled in series and individually configured to enhance at least one electrical characteristic of the operational energy derived from the electromagnetic energy; and

wherein the first and second power conditioning circuits individually comprise a voltage doubler circuit.

2. The system of claim 1 wherein the first and second power conditioning circuits are individually configured to increase a voltage of the electrical energy.

3. The system of claim 1 wherein the remote communication device comprises a radio frequency identification device.

4. The system of claim 1 wherein the signaling antenna is configured to provide the electrical energy corresponding to electromagnetic energy of the first wireless communication signal.

5. The system of claim 4 wherein the first wireless communication signal comprises data communicated by the reader.

6. The system of claim 1 further comprising a battery configured to provide operational energy to the communication circuitry.

7. The system of claim 1 wherein the reader is configured to output the first wireless communication signal using on/off key modulation.

8. The system of claim 1 wherein the modulation signal is configured to alter electrical characteristics of the signaling antenna to selectively reflect electromagnetic energy to communicate the backscatter signal.

9. A radio frequency identification device comprising:

a signaling antenna configured to provide electrical energy corresponding to received electromagnetic

10

energy comprising a first wireless communication signal from a reader;

a power antenna separate from the signaling antenna and configured to provide operational energy separate from the electrical energy of the first wireless communication signal;

a plurality of first voltage doubler circuits coupled in series and individually configured to increase a voltage of the electrical energy from the signaling antenna;

communication circuitry coupled with the first voltage doubler circuits and configured to receive the electrical energy of the increased voltage from the first voltage doubler circuits and the operational energy from the power antenna;

wherein the communication circuitry is configured to process the electrical energy of the increased voltage to process the first wireless communication signal;

wherein the communication circuitry is configured to control the signaling antenna to backscatter modulate a second wireless communication signal for communication to the reader; and

a plurality of second voltage doubler circuits coupled in series and further coupled with the power antenna and individually configured to increase a voltage of the operational energy.

10. The device of claim 9 wherein the signaling antenna is configured to provide electrical energy corresponding to the received electromagnetic energy comprising the first wireless communication signal communicated using on/off key modulation.

11. The device of claim 9 wherein the electromagnetic energy comprising the first wireless communication signal received by the signaling antenna comprises data communicated by the reader.

12. The device of claim 9 wherein the communication circuitry is only configured to process the electrical energy from the signaling antenna and is only configured to utilize operational energy received from the power antenna for power.

13. A wireless communication method comprising:

providing a first device and a second device individually configured to communicate wireless communication signals;

outputting a first wireless communication signal using the first device;

first increasing an electrical characteristic of the first wireless communication signal using a first power conditioning circuit of the second device;

second increasing the electrical characteristic of the first wireless communication signal using a second power conditioning circuit of the second device after the first increasing;

processing the first wireless communication signal using the second device after the first and second increasing; backscatter modulating radio frequency energy using the second device responsive to the processing and to communicate a second wireless communication signal to the first device;

receiving electromagnetic energy within the second device;

providing electrical energy corresponding to the electromagnetic energy using the second device;

third increasing an electrical characteristic of the electrical energy using a third power conditioning circuit of the second device;

**11**

fourth increasing the electrical characteristic of the electrical energy using a fourth power conditioning circuit of the second device after the third increasing to provide operational energy;

wherein the processing comprises processing using the operational energy; and

wherein the first, second, third and fourth power conditioning circuits individually comprise a voltage doubler circuit.

**14.** The method of claim **13** wherein the first and second increases individually comprise increasing the electrical characteristic comprising a voltage of the first wireless communication signal.

**15.** The method of claim **13** further comprising outputting a continuous wave signal using the first device, and wherein the backscatter modulating comprises backscatter modulating the continuous wave signal using the second device.

**12**

**16.** The method of claim **13** further comprising providing a battery configured to supply additional operational energy, and wherein the processing comprises processing using the additional operational energy.

**17.** The method of claim **13** wherein the first device comprises a reader and the second device comprises a radio frequency identification device.

**18.** The method of claim **13** wherein the outputting comprises outputting the first wireless communication signal using on/off key modulation.

**19.** The method of claim **13** wherein the processing comprises processing data of the first wireless communication signal.

**20.** The method of claim **13** wherein the processing comprises processing data of the first wireless communication signal having the increased electrical characteristic.

\* \* \* \* \*

UNITED STATES PATENT AND TRADEMARK OFFICE  
**CERTIFICATE OF CORRECTION**

PATENT NO. : 6,914,528 B2  
DATED : July 5, 2005  
INVENTOR(S) : Pratt et al.

Page 1 of 1

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Column 7,


Line 29, delete "G<sub>r</sub>" before "=" and insert -- G<sub>t</sub> --.

Column 8,

Line 24, insert -- attorney docket no. 13154-B -- after "having".

Signed and Sealed this

Sixth Day of June, 2006

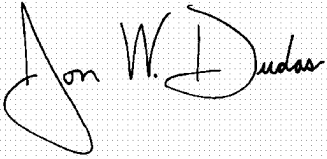A handwritten signature in black ink on a light gray dotted background. The signature reads "Jon W. Dudas" in a cursive style.

JON W. DUDAS

*Director of the United States Patent and Trademark Office*