
**Pacific Northwest
National Laboratory**

Operated by Battelle for the
U.S. Department of Energy

K Basins Groundwater Monitoring Task, K Basins Closure Project: Report for April, May, and June 2007

R. E. Peterson

August 2007

Prepared for Fluor Hanford, Inc. and the
U.S. Department of Energy
under Contract DE-AC05-76RL01830



DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor Battelle Memorial Institute, nor any of their employees, makes **any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights.** Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or Battelle Memorial Institute. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

PACIFIC NORTHWEST NATIONAL LABORATORY

operated by

BATTELLE

for the

UNITED STATES DEPARTMENT OF ENERGY

under Contract DE-AC05-76RL01830

Printed in the United States of America

Available to DOE and DOE contractors from the
Office of Scientific and Technical Information,

P.O. Box 62, Oak Ridge, TN 37831-0062;

ph: (865) 576-8401

fax: (865) 576-5728

email: reports@adonis.osti.gov

Available to the public from the National Technical Information Service,
U.S. Department of Commerce, 5285 Port Royal Rd., Springfield, VA 22161

ph: (800) 553-6847

fax: (703) 605-6900

email: orders@ntis.fedworld.gov

online ordering: <http://www.ntis.gov/ordering.htm>



This document was printed on recycled paper.

**K Basins Groundwater Monitoring Task,
K Basins Closure Project: Report for
April, May, and June 2007**

R. E. Peterson

August 2007

Prepared for Fluor Hanford, Inc. and
the U.S. Department of Energy
under Contract DE-AC05-76RL01830

Pacific Northwest National Laboratory
Richland, Washington 99352

Summary

This report provides information on groundwater monitoring near the K Basins during April, May, and June 2007. Conditions remained similar to those reported in the previous quarter's report, with no evidence in monitoring results to suggest groundwater impact from current loss of shielding water from either basin to the ground. During the current quarter, the first results from two new wells installed between KE Basin and the river became available. Groundwater conditions at each new well are reasonably consistent with adjacent wells and expectations, with the exception of anomalously high chromium concentrations at one of the new wells. The K Basins monitoring network will be modified for FY 2008 to take advantage of new wells recently installed near KW Basin as part of a pump-and-treat system for chromium contamination, and also the new wells recently installed between the KE Basin and the river, which augment long-term monitoring capability in that area.

Contents

Summary	iii
1.0 Introduction	1
1.1 Sampling and Analysis Activities	1
1.2 Monitoring for Basin Water Loss.....	1
1.3 Groundwater Contamination from Past Basin Leakage and Other Sources.....	1
2.0 Technical Details and Discussion	2
2.1 Groundwater Conditions Near the KE Basin	2
2.2 Groundwater Conditions Near the KW Basin	3
2.3 Other Central 100-K Area News	4
3.0 References	4

Figures

1 Location Map for Wells in the Vicinity of the K Basins, and 2006 Tritium and Carbon-14 Plumes	7
2 Tritium in Groundwater Near the KE Basin	8
3 Tritium in Groundwater Along East Side of KE Reactor Building	8
4 Migration of Tritium Plume Created by Leakage from KE Basin in 1993.....	9
5 Tritium in Groundwater Near the KW Basin.....	9
6 Tritium in Groundwater Along East Side of the KW Reactor Building	10

Tables

1 Tritium in Groundwater Near the KE Basin	5
2 Tritium in Groundwater Near the KW Basin.....	6

1.0 Introduction

The information contained in this periodic report represents an initial interpretation of monitoring results by a hydrologist from Pacific Northwest National Laboratory. Subsequent new results and/or facility information may warrant changes to these initial interpretations. Groundwater conditions near the K Basins remain very similar to conditions described in the report for the previous quarter (Peterson 2007). Some of the information below is repeated from that earlier report, such that each quarterly report provides a stand alone description of conditions.

The following Section 1.0 subsections present a synopsis of current conditions and key issues with regard to groundwater near the K Basins. The level of detail is intended for general audiences. Technical details are presented in Section 2.0.

1.1 Sampling and Analysis Activities

- The quarterly groundwater sampling event occurred as scheduled during April 2007.
- Additional sampling continued monthly at three wells near KE Basin to more closely monitor conditions while basin decontamination activities are underway.
- The next regularly scheduled quarterly sampling event occurs during July 2007. Analytical results from this sampling event should become available by the late August/early September 2007.

1.2 Monitoring for Basin Water Loss

- Groundwater monitoring results do not exhibit evidence to indicate current water loss to the ground from either the KE or KW fuel storage basin. If water loss to the ground is occurring, it is a relatively small volume when compared to the previous well-documented leakage from KE Basin in 1993, which was readily identifiable in groundwater monitoring results.
- The increase in tritium concentrations that began at two wells near KE Basin in 2003 remain unexplained. The trend reversed itself during 2004 and current concentrations are typical of pre-2003 trends. Although an association with loss of basin water to the ground is possible, there is no conclusive evidence for this.

1.3 Groundwater Contamination from Past Basin Leakage and Other Sources

- The tritium plume created by the leakage in 1993 from the KE Basin has migrated downgradient more than half the distance to the river. Based on travel time estimates, the leading edge of that plume is likely to be near the shoreline currently. However, tritium has not yet been detected during recent sampling events at the two aquifer tube sites in the direct path of this plume.
- Sources for tritium other than past leakage from the KE Basin (i.e., 1976–1979; 1993) also contribute to the currently mapped plume. The most prominent sources near the reactor buildings

are the former reactor atmosphere condensate cribs, which were excavated in 2004. Some contamination may remain in the vadose zone beneath those waste disposal sites.

- Radiological contamination is likely to be present in the vadose zone beneath the drain fields/injection wells associated with each fuel storage basin. These past-practice waste sites, which are located on the river side of the reactor buildings, have not yet been remediated. Unusually high water-table conditions (e.g., 1996/97 and 2006) and/or infiltration of moisture from the surface may periodically remobilize radiological contamination remaining beneath these waste sites.

2.0 Technical Details and Discussion

The following sections provide technical details regarding groundwater conditions near the KE and KW fuel storage basins, which are located within the respective reactor buildings. Groundwater beneath these basins is monitored under requirements designed for an operating facility (Peterson 2002). Groundwater near the Columbia River downgradient from the basins is monitored at aquifer tube sites along the river shoreline (Mahood 2007). Tritium is a key indicator for detecting basin water loss to the ground because of high tritium concentrations in basin water and tritium's mobility in the environment. However, tritium in groundwater near the 100-K reactors may come from a variety of past-practice waste sites, so additional groundwater constituents are monitored to help differentiate the various sources.

Well locations in the 100-K Area are shown in Figure 1. Additional maps for the 100-K Area are included in the Groundwater Performance Assessment Project's annual report (Peterson and Raidl 2007; <http://groundwater.pnl.gov/reports>), or contact Bob Peterson (373-9020; robert.peterson@pnl.gov). Note that detailed maps of facilities and aerial photographs are limited to official use only.

2.1 Groundwater Conditions Near the KE Basin

Analytical results for the second calendar quarter of 2007 for wells that monitor the flow path beneath the KE Basin are listed in Table 1 and updated tritium concentration trends at selected wells are shown in Figure 2. The tritium concentration in KE Basin shielding water was measured at 1,900,000 pCi/L in June 2007. Since 2005, tritium concentrations have been measured monthly at wells 199-K-27 and 199-K-109A, which are adjacent to and downgradient of the KE Basin. The increased frequency of sampling was started in response to an abrupt rise that started in early 2003, for which there is no obvious explanation. Other shielding water indicators (e.g., technetium-99; gross alpha and gross beta) at these two wells do not show similar trends, so a definitive explanation for the tritium trend remains elusive. The purpose of monthly sampling is to track trends while sludge removal activities are underway, and to more closely monitor conditions following the unexpected rise in concentrations during 2003.

The plume created by leakage from the KE Basin construction joint in 1993 appears to have passed downgradient well 199-K-32A, which is located approximately mid-distance between the KE Reactor building and the Columbia River. Tritium concentrations at that well have now returned to levels that existed prior to the arrival of this leakage plume at the well in late 1999 (Figure 3). The trends at well 199-K-27, located adjacent to the KE Basin, and at 199-K-32A have been used to estimate a migration rate of 0.12 m/d for the plume (Peterson 2002, pp. 5.11 to 5.13). The peak concentration observed at well 199-K-32A was ~80,000 pCi/L. Assuming a similar migration rate and a reduction in concentration that

is proportionate to the reduction between wells 199-K-27 and 199-K-32A, this plume may be currently near the river at concentrations that are below the drinking water standard. However, tritium was not detected at aquifer tube sites situated along the shoreline downgradient from the KE Basin during the last two sampling events at those sites (February 2006 and January 2007).

Tritium concentrations are elevated above the drinking water standard at wells within the groundwater flow path that passes just to the east of the KE Reactor building. The presumed waste site source for this tritium (and co-contaminant carbon-14) is the former KE Condensate Crib (116-KE-1), which was excavated in March 2004 (see Figure 1 for location map). Tritium trends in the two wells that monitor the flow path downgradient of the crib are shown in Figure 4. Concentrations at well 199-K-30 remain high relative to other locations near KE Reactor, although current concentrations are significantly lower than their historical highs, which ranged up to nearly 2,400,000 pCi/L in the late 1990s. The absence of a long-term gradually decreasing trend at this well suggests some re-supply of tritium to the plume, possibly from the vadose zone beneath the former condensate crib. In early 2001, an increasing trend started at well 199-K-29, which is located ~50 meters north of the northeast corner of the KE Basin. This well is near to, but not in, the presumed groundwater flow path beneath the KE Basin. That trend peaked in early 2002, declined to well below the drinking water standard in 2003, rose again in 2004, and currently reveals a fairly constant level below or at the drinking water standard. The absence of technetium-99 and presence of carbon-14 at well 199-K-29 support the assumption that the former KE Condensate Crib and underlying soil are the source for the tritium.

2.2 Groundwater Conditions Near the KW Basin

Analytical results for the second calendar quarter of 2007 for wells that monitor the flow path beneath the KW Basin are listed in Table 2 and updated tritium concentration trends are shown in Figure 5. For wells adjacent to and immediately downgradient of the KW Basin, recent tritium concentrations remain well below the drinking water standard, with no evidence for water loss from the basin causing an impact on groundwater. The tritium concentration in KW Basin shielding water was 1,900,000 pCi/L in June 2007. Starting in mid-2003, results for samples from well 199-K-34 showed a trend toward slightly higher values. However, historical variability appears to be episodic, and recent results from the well remain within the expected range. The most recent result from the well indicates a distinct change to a higher concentration. The cause for this trend change, and trend changes observed for other constituents, may be changes in the groundwater flow pattern brought on by the new pump-and-treat system that is remediating the chromium plume near KW Reactor.

To the east of the KW Reactor building, tritium concentrations at well 199-K-106A remain well above the drinking water standard, but have declined significantly since two distinct spikes in 2003 and 2005, each of which exceeded 1,000,000 pCi/L (Figure 6). The well is located ~50 meters northeast of the KW Reactor building and monitors conditions downgradient of the former KW Condensate Crib (116-KW-1), which was excavated in early 2004. The suspected tritium source is the vadose zone beneath the former crib, which likely contains tritium and carbon-14. The processes responsible for the elevated tritium (and other waste indicators, e.g., nitrate, technetium-99) in groundwater at this well are not fully understood, although a connection to the KW Basin is unlikely.

Because of high tritium concentrations in the KW Basin, loss of KW Basin water to the ground is routinely evaluated as a possible cause when interpreting changes in the characteristics of tritium plumes

near the KW Reactor building. However, interpretations to date suggest that unusual circumstances would have to exist if the basin were the source for the tritium observed at well 199-K-106A, and the possibility of that is considered remote.

2.3 Other Central 100-K Area News

New wells 199-K-137, 199-K-138, 199-K-139, 199-K-140 and 199-K-158 (see Figure 1 for locations) installed in fall 2006 near the KW Reactor are now in use as part of a pump-and-treat system addressing chromium contamination in groundwater. Three of the new wells located downgradient from KW Reactor, along with existing well 199-K-132, will be used as groundwater extraction wells. Several wells inland of the KW Reactor will be used to inject treated effluent.

Two new wells (199-K-141 and 199-K-142) installed between the KE Reactor and the Columbia River were sampled for the first time during April 2007. The purpose for these wells is to enhance long-term monitoring capability in the area near the KE Reactor. Initial results showed anomalously high chromium at 199-K-141 (~250 ug/L) and low tritium (~230 pCi/L) at 199-K-142. Investigation of those results is continuing.

3.0 References

Mahood RO, RF Raidl, MJ Hartman, and RE Peterson. 2007. *100/300 Areas Aquifer Tube Sampling and Analysis Instruction for Fiscal Year 2007, Hanford Site, Washington*. SGW-32647, Rev. 0, Fluor Hanford, Inc., Richland, Washington.

Peterson RE. 2002. *Groundwater Monitoring and Assessment Plan for the 100-K Area Fuel Storage Basins*. PNNL-14033, Pacific Northwest National Laboratory, Richland, Washington.

Peterson RE. 2007. *K Basins Groundwater Monitoring Task, Spent Nuclear Fuels Project: Report for January, February, and March 2007*. PNNL-16556, Pacific Northwest National Laboratory, Richland, Washington.

Peterson RE, FA Spane, KB Olsen, and MD Williams. 2002. *Evaluation of Potential Sources for Tritium Detected in Groundwater at Well 199-K-111A, 100-K Area*. PNNL-14031, Pacific Northwest National Laboratory, Richland, Washington.

Peterson RE and RF Raidl. 2007. "100-KR-4 Operable Unit." In Chapter 2.3 of *Hanford Site Groundwater Monitoring for Fiscal Year 2006*. PNNL-16346, MJ Hartman, LF Morasch, and WD Webber (eds.), Pacific Northwest National Laboratory, Richland, Washington.

Table 1. Tritium in Groundwater Near the KE Basin (Apr/May/Jun 2007)

(Updated July 23, 2007; new results, changes, and interpretations are printed in blue)

Well Name (Sample Frequency) Position	Current Quarter, pCi/L (sample date)	Recent Concentration Trend	Prior Results, pCi/L (sample date)	Historical Concentration Trend Since 1997
Wells Downgradient of KE Basin (Tritium concentration in KE Basin shielding water is ~1,900,000 pCi/L—June 2007)				
<input checked="" type="checkbox"/> 199-K-109A (Q/M) Adjacent to KE Basin and basin drain field.	1,210 & 1,330 (4/16/07) 2,030 (6/22/07)	Concentrations remain well below the DWS, following pulse that started in 2003. Tc-99 not detected.	2,600 (1/18/07)	General decline from high of ~90,000 in mid-1997 (with periodic peaks up to 420,000) until early 2003, when new pulse began.
<input checked="" type="checkbox"/> 199-K-27 (Q/M) Adjacent to KE Basin.	4,910 (4/02/07) 4,610 & 4,400 (4/27/07) 7,460 (6/22/07)	Concentrations remain well below the DWS, following pulse that started in 2003. Tc-99 not detected.	5,300 5,000 (1/12/07) 5,120 (2/23/07)	General decline from high of ~40,000 in 1997 to low of several hundred, until early 2003 when new pulse started.
199-K-141 (Q) Between KE Reactor and Columbia River.	4,500 (4/27/07)	Reasonably consistent with expectations based on values at adjacent wells.		New well; first sampled in April 2007.
199-K-142 (Q) Between KE Reactor and Columbia River.	377 (4/27/07)	Anomalously low value, based on values at adjacent wells.		New well; first sampled in April 2007.
199-K-32A (Q) Between KE Reactor and Columbia River.	3,600 (4/27/07)	Continued long-term gradual decrease.	5,700 (1/09/07)	Historically 4,000~80,000; plume created by 1993 KE Basin leak passed in 2001.
Wells East of KE Basin				
199-K-29 (Q/M) Downgradient of KE Condensate Crib; near KE Basin.	22,100 (4/02/07) 21,200 (4/27/07) 20,700 (6/22/07)	Continuing gradual rise to near DWS in recent months. Source of tritium assumed to be former KE condensate crib, not KE basin.	16,000 (1/12/07) 19,800 (2/23/07)	Generally constant within range of 8,000~24,000 until summer 2001, when concentrations rose, reaching a high of 98,300 in 2002.
199-K-30 (Q) Downgradient of KE Condensate Crib.	370,000 (4/17/07)	Variable within range 200,000~500,000 during past four years.	320,000 (1/12/07)	Variable; cyclic within range of ~150,000 to ~2,360,000 since mid-1998.
Wells Upgradient of the KE Basin				
199-K-110A (SA) Near KE Reactor.	290 (4/27/07)	Typically not detected.	ND (10/31/06)	Generally not detected (less than several hundred pCi/L).
199-K-36 (A) Inland from Reactor	ND (10/19/06)	Essentially constant near the method detection limit.	392 & 574 (10/10/05)	Change to current level in ~1997.
<input checked="" type="checkbox"/> Indicates key well for detecting shielding water impact on groundwater. Technetium-99 (Tc-99) is an additional indicator for shielding water. Abbreviations: (M) = monthly; (Q) = quarterly; (SA) = semiannually; (A) = annually; and (BE) = biennially <u>Regulatory Standards for Tritium in Groundwater:</u> The drinking water standard (DWS) is 20,000 pCi/L and the DOE derived concentration guide is 2,000,000 pCi/L. The offsite lab (STL-RL) detection limit is ~300 pCi/L.				

Table 2. Tritium in Groundwater Near the KW Basin (Apr/May/Jun 2007)

(Updated July 23, 2007; new results, changes, and interpretations are printed in blue)

Well Name (Sample Frequency) <i>Position</i>	Current Quarter, pCi/L (sample date)	Recent Concentration Trend	Prior Results, pCi/L (sample date)	Historical Concentration Trend Since 1997
Wells Downgradient of KW Basin (Tritium concentration in KW Basin shielding water is ~1,900,000 pCi/L—June 2007)				
☑ 199-K-34 (Q) <i>Adjacent to KW Basin.</i>	10,000 (4/27/07)	Recent unexpected rise; possible consequence of changing flow pattern because of new pump and treat system.	2,900 (1/22/07)	Long-term gradual decrease from ~6,000 to ~1,000. Recent unexplained change in trend started late 2003.
☑ 199-K-107A (Q) <i>Adjacent to KW Basin and basin drain field.</i>	640 (4/16/07)	Continued long-term decline to well below the DWS; low variability.	410 (1/18/07)	Long-term gradual decline from ~2,000 down to <1,000.
199-K-139 (Q) <i>Downgradient of KW Reactor.</i>	740 (4/12/07)	Constant; very low level of tritium.	730 630 (10/31/06)	New well installed as part of KW chromium plume remedial action.
199-K-132 (Q) <i>Between KW Reactor and the Columbia River.</i>	2,000 (4/12/07)	Variable; concentration range similar to 199-K-34, except for recent rise at 199-K-34.	1,200 (1/09/07)	Overall decline from plume that passed 199-K-33 during 1995~1998, with peak values of ~45,000.
199-K-31 (A) <i>Near river.</i>	910 (4/18/07)	Fairly constant, low variability.	860 (10/19/06)	Long-term gradual decline; in path of plume from 200 East (tritium, NO ₃ , Tc-99).
Wells East of KW Basin				
199-K-106A (Q) <i>Downgradient of KW Condensate Crib; alongside KW Basin.</i>	280,000 (4/16/07)	Returning to lower concentrations, following high values in 2005. Chloride, nitrate, and Tc-99 are also elevated.	120,000 (1/18/07)	Variable within range of ~2,500 to ~25,000 (following 1996 plume passage that had peak of 676,000), until recent pulse started in July 2001.
Wells upgradient of the KW Basin				
199-K-108A (A) <i>Adjacent to KW Reactor.</i>	970 (4/27/07)	Slight recent rise. Other contaminants show a return (increase) back to pre- dilution concentrations.	250 (10/12/06)	Gradual decline from ~650 in 1996; dilution by clean water 1999 to 2004, with tritium undetected.
199-K-35 (BE) <i>Background for KW Reactor.</i>	420 (10/19/06)	Continued gradual decline to background levels.	949 (10/05/05)	Long-term decline from ~2,600 to <1,000 (regional background for 100-K Area).
☑ Indicates key well for detecting shielding water loss to the ground. Technetium-99 (Tc-99) is an additional indicator for shielding water. Abbreviations: (M) = monthly; (Q) = quarterly; (SA) = semiannually; (A) = annually; (BE) = biennially <u>Regulatory Standards for Tritium in Groundwater:</u> The drinking water standard (DWS) is 20,000 pCi/L and the DOE derived concentration guide is 2,000,000 pCi/L. The offsite lab (STL-RL) detection limit is 300 pCi/L.				

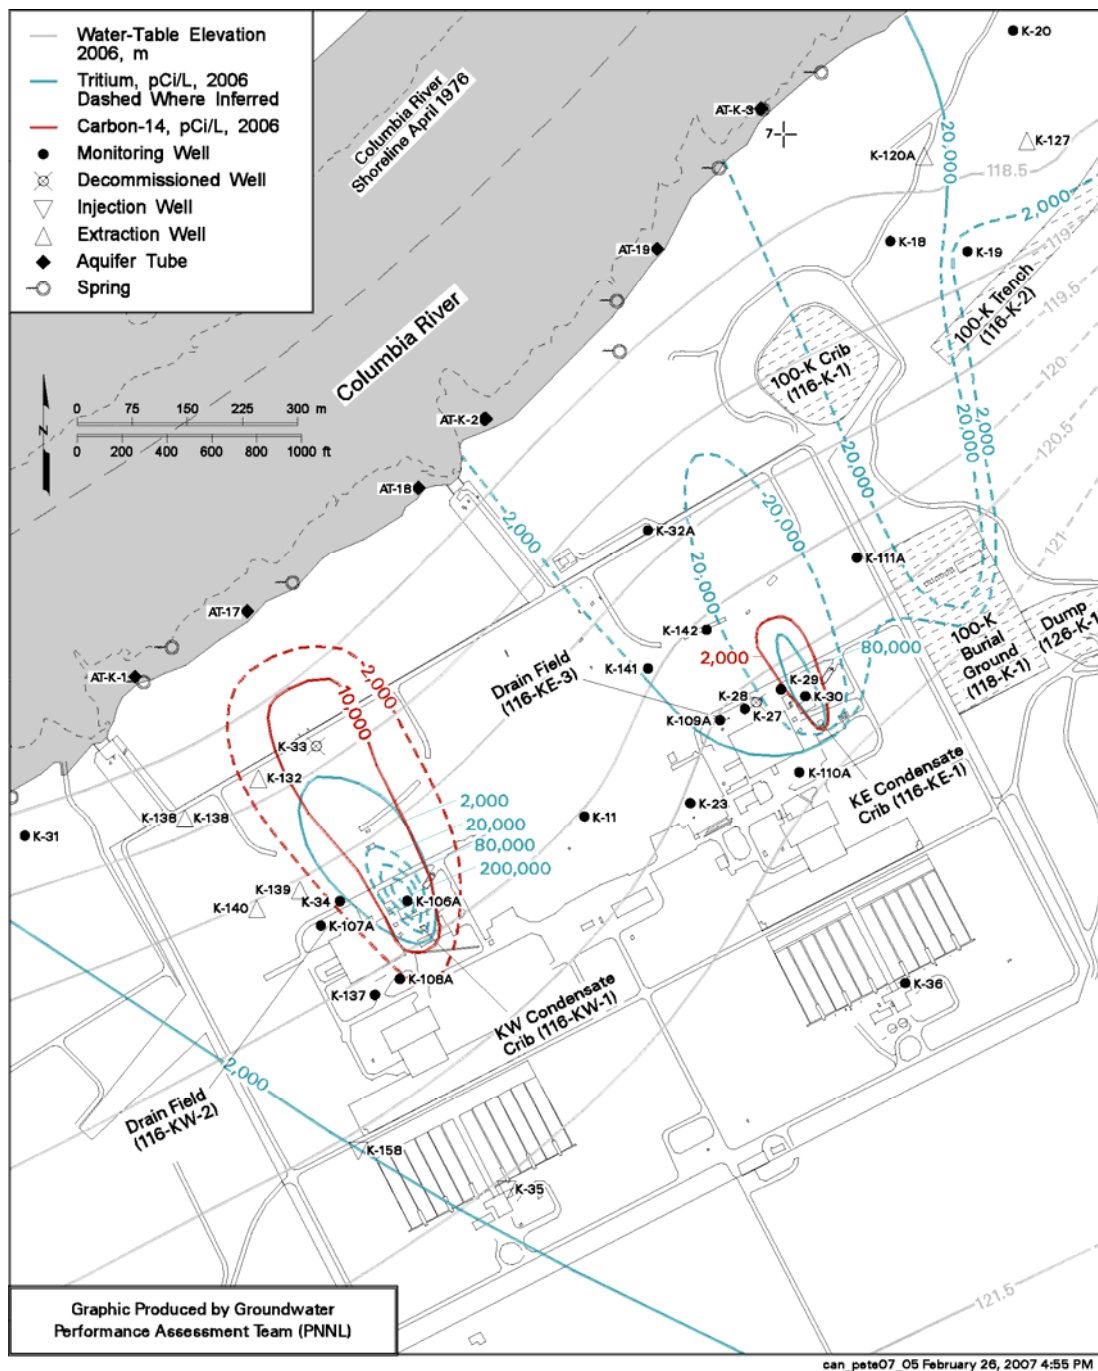


Figure 1. Location Map for Wells in the Vicinity of the K Basins, and 2006 Tritium and Carbon-14 Plumes (modified from Peterson and Raidl 2007).

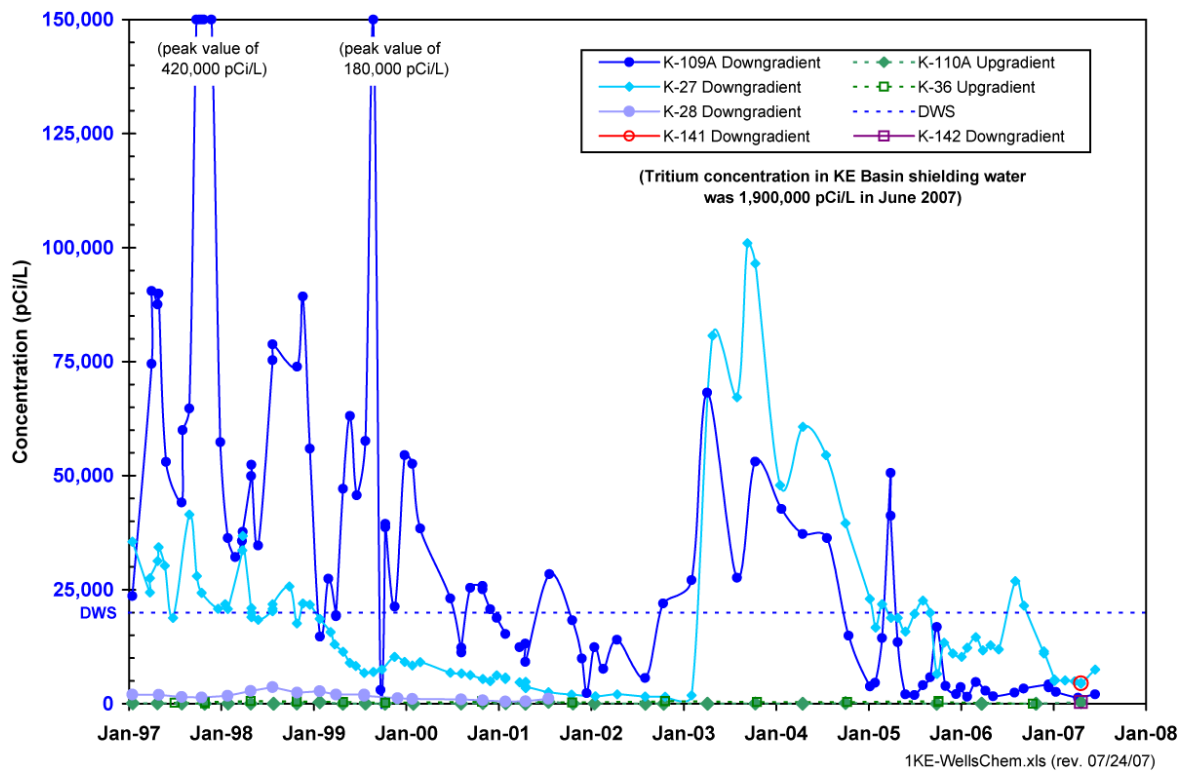


Figure 2. Tritium in Groundwater Near the KE Basin

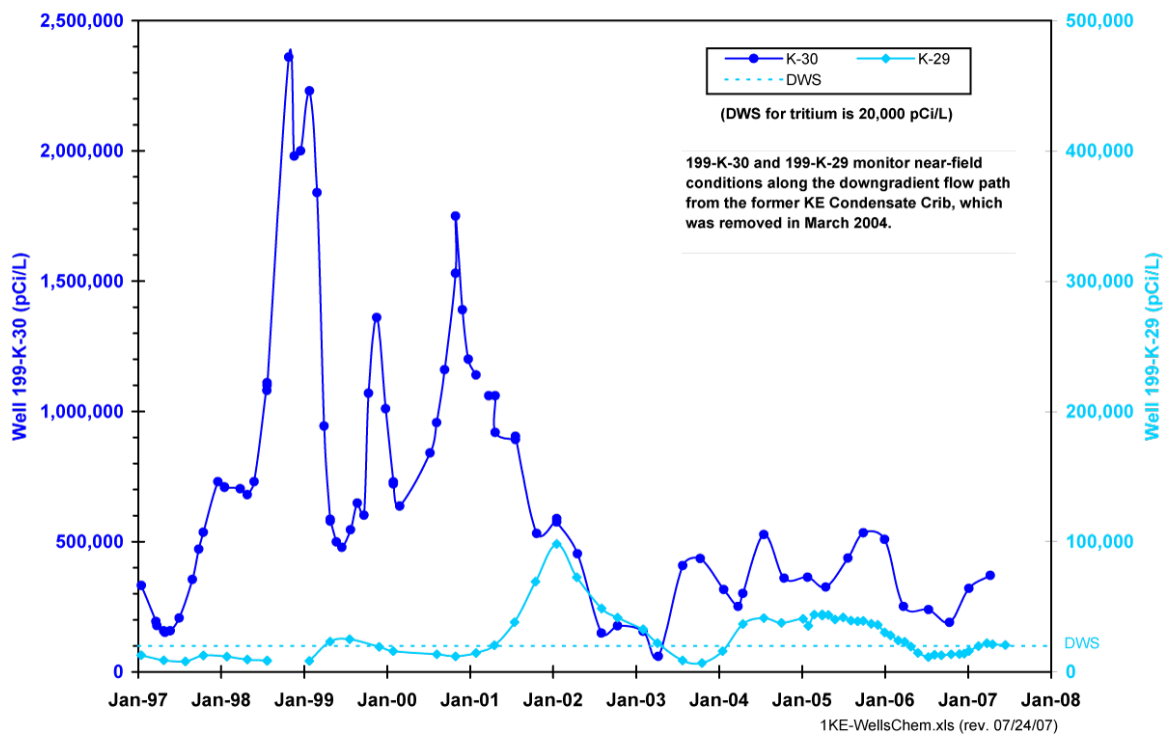


Figure 3. Tritium in Groundwater Along East Side of KE Reactor Building

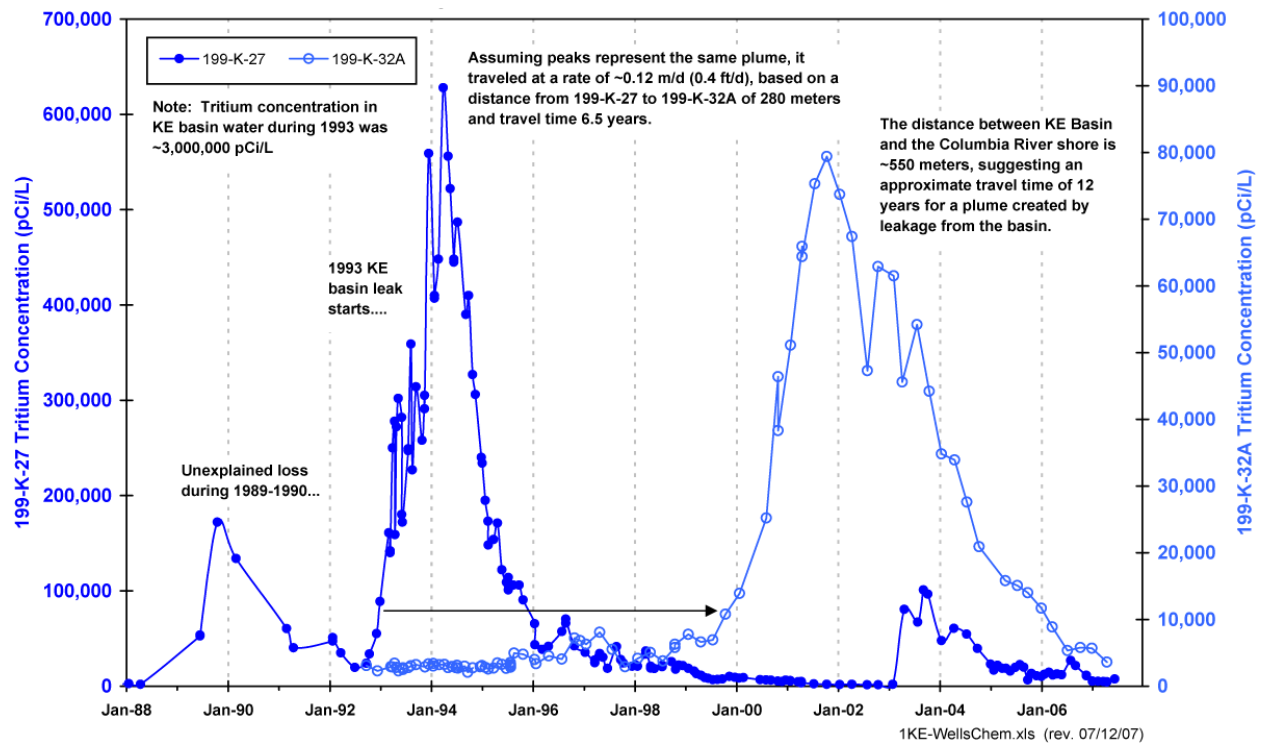


Figure 4. Migration of Tritium Plume Created by Leakage from KE Basin in 1993

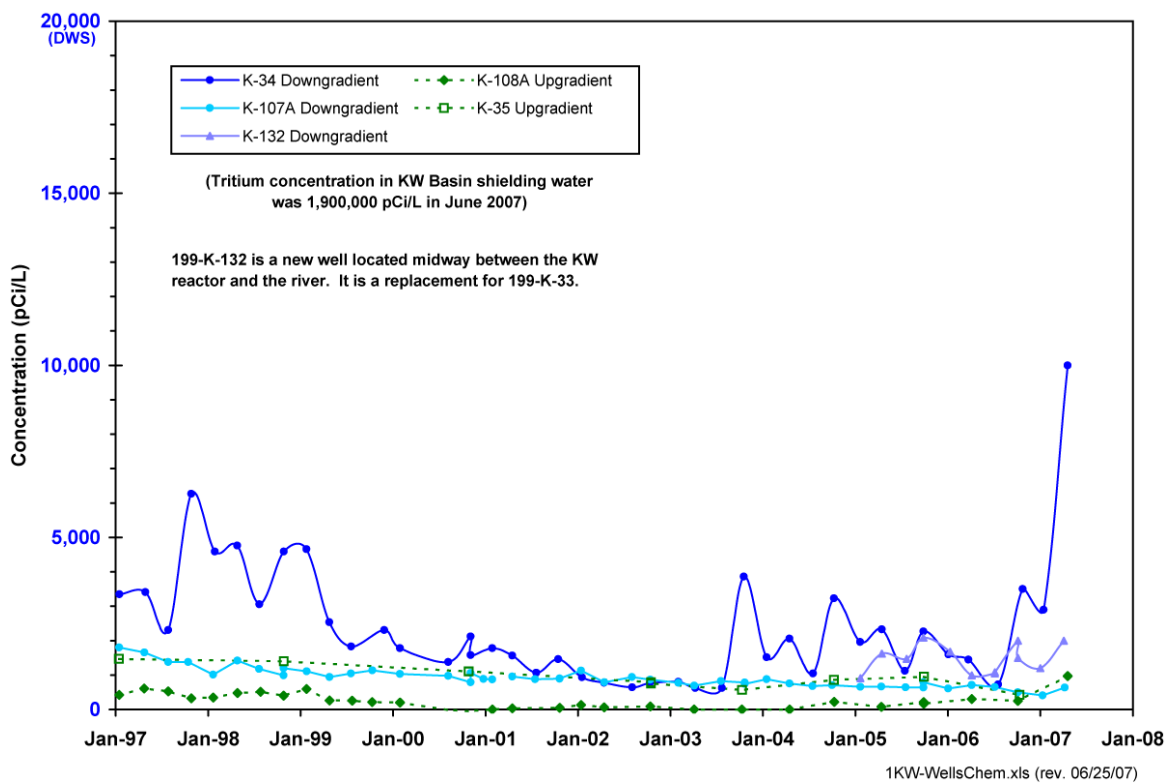


Figure 5. Tritium in Groundwater Near the KW Basin

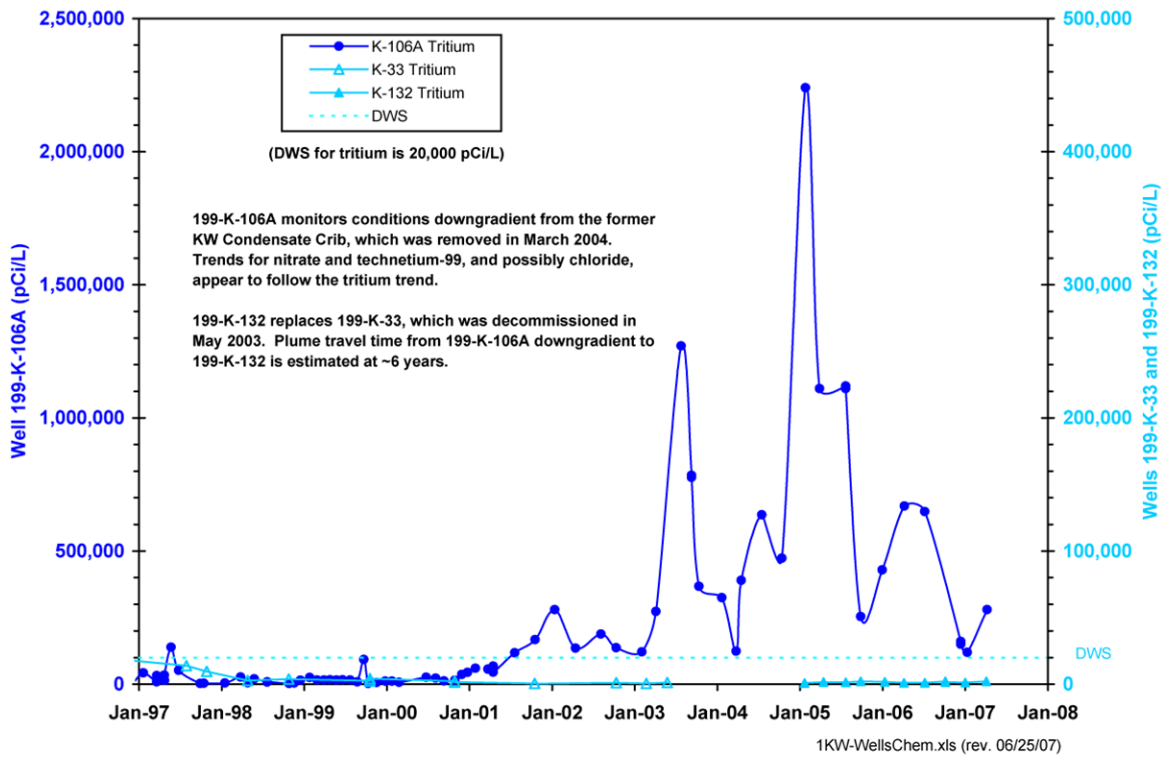


Figure 6. Tritium in Groundwater Along East Side of the KW Reactor Building

Distribution*

<u>No. of Copies</u>		<u>No. of Copies</u>	
6 DOE Richland Operations Office		Washington Closure Hanford, LLC	
LD Earley	A5-19	RA Carlson	X0-17
JP Hanson	A5-13		
RD Hildebrand	A6-38	58 Pacific Northwest National Laboratory	
PM Pak	A5-16		
KM Thompson	A6-38	MD Freshley	K9-33
J Zeisloft	A3-04	JS Fruchter	K6-96
		RE Peterson	K6-75
3 Fluor Hanford, Inc. (K Basins Closure Project)		Hanford Technical Library (2)	P8-55
GS Hunacek	X3-79		
RM Jochen	X3-74		
DJ Watson (Dave)	X3-79		
6 Fluor Hanford, Inc. (Groundwater Project)			
MJ Hartman	E6-35		
RL Jackson	E6-35		
SP Luttrell	E6-35		
RF Raidl	E6-35		
LC Swanson	E6-35		
WD Webber	E6-35		

*Note: This report will be distributed in .pdf format via email, unless otherwise requested by recipients. If other copies are needed, please contact R.E. Peterson (509-373-9020), Pacific Northwest National Laboratory, Richland, Washington.