



PNNL-19071

Prepared for the U.S. Department of Energy
Under Contract DE-AC05-76RL01830

Annual Hanford Seismic Report for Fiscal Year 2009

Pacific Northwest National Laboratory
Hanford Seismic Assessment Team
AC Rohay RE Clayton
MD Sweeney JL Devary
DC Hartshorn

December 2009



DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor Battelle Memorial Institute, nor any of their employees, makes **any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights.** Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof, or Battelle Memorial Institute. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

PACIFIC NORTHWEST NATIONAL LABORATORY
operated by
BATTELLE
for the
UNITED STATES DEPARTMENT OF ENERGY
under Contract DE-AC05-76RL01830

Printed in the United States of America

**Available to DOE and DOE contractors from the
Office of Scientific and Technical Information,
P.O. Box 62, Oak Ridge, TN 37831-0062;
ph: (865) 576-8401
fax: (865) 576-5728
email: reports@adonis.osti.gov**

**Available to the public from the National Technical Information Service,
U.S. Department of Commerce, 5285 Port Royal Rd., Springfield, VA 22161
ph: (800) 553-6847
fax: (703) 605-6900
email: orders@ntis.fedworld.gov
online ordering: <http://www.ntis.gov/ordering.htm>**



This document was printed on recycled paper.

(9/2003)

Annual Hanford Seismic Report for Fiscal Year 2009

A. C. Rohay
M. D. Sweeney
D. C. Hartshorn
R. E. Clayton
J. L. Devary

December 2009

Prepared for
the U.S. Department of Energy
under Contract DE-AC05-76RL01830

Pacific Northwest National Laboratory
Richland, Washington 99352

Summary

The Hanford Seismic Assessment Program (HSAP) provides an uninterrupted collection of high-quality raw and processed seismic data from the Hanford Seismic Network for the U.S. Department of Energy and its contractors. The HSAP is responsible for locating and identifying sources of seismic activity and monitoring changes in the historical pattern of seismic activity at the Hanford Site. The data are compiled, archived, and published for use by the Hanford Site for waste management, natural phenomena hazards assessments, and engineering design and construction. In addition, the HSAP works with the Hanford Site Emergency Services Organization to provide assistance in the event of a significant earthquake on the Hanford Site. The Hanford Seismic Network and the Eastern Washington Regional Network consist of 44 individual sensor sites and 15 radio relay sites maintained by the Hanford Seismic Assessment Team.

During FY 2009, the Hanford Seismic Network recorded nearly 3000 triggers on the seismometer system, which included over 1700 seismic events in the southeast Washington area and an additional 370 regional and teleseismic events. There were 1648 events determined to be local earthquakes relevant to the Hanford Site. Nearly all of these earthquakes were detected in the vicinity of Wooded Island, located about eight miles north of Richland just west of the Columbia River. Recording of the Wooded Island events began in January with over 250 events per month through June 2009. The frequency of events decreased starting in July 2009 to approximately 10-15 events per month through September 2009. Most of the events were considered minor (coda-length magnitude [M_c] less than 1.0) with 47 events in the 2.0-3.0 range. The estimated depths of the Wooded Island events are shallow (averaging less than 1.0 km deep) with a maximum depth estimated at 2.3 km. This places the Wooded Island events within the Columbia River Basalt Group (CRBG).

The highest-magnitude event ($3.0M_c$) occurred on May 13, 2009 within the Wooded Island swarm at depth 1.8 km. With regard to the depth distribution, 1613 earthquakes were located at shallow depths (less than 4 km, most likely in the Columbia River basalts), 16 earthquakes were located at intermediate depths (between 4 and 9 km, most likely in the pre-basalt sediments), and 19 earthquakes were located at depths greater than 9 km, within the crystalline basement. Geographically, 1630 earthquakes were located in swarm areas and 18 earthquakes were classified as random events.

The low magnitude of the Wooded Island events has made them undetectable to all but local area residents. However, some Hanford employees working within a few miles of the area of highest activity and individuals living in homes directly across the Columbia River from the swarm center have reported feeling many of the larger magnitude events.

The Hanford Strong Motion Accelerometer (SMA) network was triggered numerous times by the Wooded Island swarm events. The maximum acceleration value recorded by the SMA network was approximately 3 times lower than the reportable action level for Hanford facilities (2% g) and no action was required.

The swarming is likely due to pressure that has built up, cracking the brittle basalt layers within the Columbia River Basalt Formation (CRBG). Similar earthquake “swarms” have been recorded near this same location in 1970, 1975 and 1988. Prior to the 1970s, swarming may have occurred, but equipment was not in place to record those events.

The Wooded Island swarm, due its location and the limited magnitude of the events, does not pose any significant risk to Hanford waste storage facilities. Since swarms of the past did not intensify in magnitude, seismologists do not expect that these events will persist or increase in intensity. However, Pacific Northwest National Laboratory (PNNL) will continue to monitor the activity.

Abbreviations and Acronyms

BWIP	Basalt Waste Isolation Project
CRBG	Columbia River Basalt Group
DOE	U.S. Department of Energy
ETNA	strong motion accelerometer manufactured by Kinemetrics
EWRN	Eastern Washington Regional Network
FY	fiscal year
GPRS	General Packet Radio Service
GPS	Global Positioning System
HSAP	Hanford Seismic Assessment Program
HSN	Hanford Seismic Network
M_c	coda-length magnitude
M_L	local magnitude
PNNL	Pacific Northwest National Laboratory
SMA	strong motion accelerometer
USGS	U.S. Geological Survey
UTC	Coordinated Universal Time
UW	University of Washington
WHC	Westinghouse Hanford Company

Contents

Summary	iii
Abbreviations and Acronyms	v
1.0 Introduction	1.1
1.1 Mission.....	1.1
1.2 History of Monitoring Seismic Activity at Hanford	1.1
1.3 Documentation and Reports	1.2
2.0 Network Operations.....	2.1
2.1 Seismometer Stations	2.1
2.1.1 Station Maintenance.....	2.6
2.1.2 Data Acquisition.....	2.7
2.2 Strong Motion Accelerometer Stations	2.8
2.2.1 Location.....	2.8
2.2.2 Station Design	2.8
2.2.3 Strong Motion Accelerometer Operations Center.....	2.10
2.2.4 Strong Motion Operational Characteristics	2.10
3.0 Geology and Tectonic Analysis.....	3.1
3.1 Earthquake Stratigraphy.....	3.1
3.2 Geologic Structure Beneath the Monitored Area	3.1
3.3 Tectonic Pattern.....	3.4
4.0 Earthquake Catalog Description.....	4.1
4.1 Coda-Length Magnitude	4.1
4.2 Velocity Model.....	4.1
4.3 Quality Factors (Q).....	4.6
5.0 Seismic Activity – FY 2009	5.1
5.1 Summary	5.1
5.2 First Quarter FY 2009 Earthquakes	5.4
5.2.1 Location and Depth of Earthquakes	5.4
5.2.2 Major Anticlinal Ridges	5.4
5.2.3 Earthquake Swarm Areas	5.4
5.2.4 Random or Floating Events.....	5.4
5.3 Second Quarter FY 2009 Earthquakes	5.4
5.3.1 Location and Depth of Earthquakes	5.4
5.3.2 Major Anticlinal Ridges	5.5
5.3.3 Earthquake Swarm Areas	5.5
5.3.4 Random or Floating Events.....	5.5
5.4 Third Quarter FY 2009 Earthquakes	5.6
5.4.1 Location and Depth of Earthquakes	5.6

5.4.2	Major Anticlinal Ridges	5.6
5.4.3	Earthquake Swarm Areas	5.6
5.4.4	Random or Floating Events	5.6
5.5	Fourth Quarter FY 2009 Earthquakes	5.7
5.5.1	Location and Depth of Earthquakes	5.7
5.5.2	Major Anticlinal Ridges	5.7
5.5.3	Earthquake Swarm Areas	5.7
5.5.4	Random or Floating Events	5.9
6.0	Strong Motion Accelerometer Operations	6.1
6.1	Fourth Quarter FY 2009 Triggers of the Hanford SMA Network	6.1
6.2	FY 2009 Triggers of the Hanford SMA Network	6.2
7.0	Capabilities in the Event of a Significant Earthquake	7.1
8.0	References	8.1

Figures

Figure 2.1. Seismometer and Strong Motion Accelerometer Stations in the Hanford Seismic Network	2.3
Figure 2.2. Seismometer Stations in the Eastern Washington Regional Network	2.5
Figure 2.3. Cold Creek Station (CCRK) in 2009 after Dry Creek Fire.	2.6
Figure 2.4. Schematic Diagram of a Strong Motion Accelerometer Installation	2.10
Figure 3.1. Physical and Structural Geology of the Hanford Site, Washington	3.2
Figure 3.2. Geologic Cross Sections through the Columbia Basin (Reidel et al. 1994)	3.3
Figure 5.1. FY 2009 Earthquakes Recorded Within the Hanford Monitoring Area (October 2008 through September 2009)	5.3
Figure 5.2. Earthquakes Occurring in the Hanford Monitoring Area Between July 1, 2009 and September 30, 2009 (fourth quarter)	5.8
Figure 5.3. Cross-Sectional Depiction (along 119W30 longitude) of Earthquakes Occurring in the Hanford Monitoring Area between July 1, 2009 and September 30, 2009 (fourth quarter)	5.9
Figure 6.1. Acceleration Records from the September 11, 2009 magnitude 2.7 Swarm Event at the 300 Area SMA	6.1
Figure 6.2. Acceleration Records from the May 13, 2009 Wooded Island Swarm Event at the 400 Area SMA	6.3

Tables

Table 2.1. Seismometer Stations in the Hanford Seismic Network	2.2
Table 2.2. Seismometer Stations in the Eastern Washington Regional Network	2.4
Table 2.3. Free-Field Strong Motion Accelerometer Sites	2.8
Table 2.4. Instrument Parameters for the Kinematics ETNA System in the Hanford SMA Network	2.9
Table 3.1. Thicknesses of Stratigraphic Units in the Monitoring Area (from Reidel et al. 1994)	3.4
Table 4.1. Local Seismic Data, October 1, 2008 – September 30, 2009	4.2
Table 4.2. Crustal Velocity Model for Eastern Washington (from Rohay et al. 1985)	4.6
Table 5.1. Depth Distribution of Earthquakes for FY 2009	5.1
Table 5.2. Earthquake Locations for FY 2009	5.2
Table 6.1. Maximum Accelerations from the Highest Magnitude (M_c) Wooded Island Earthquake Swarm Events during FY 2009	6.2

1.0 Introduction

This annual report documents the locations, magnitudes, and seismic interpretations of earthquakes recorded for the Hanford monitoring area of south-central Washington during fiscal year (FY) 2009 (October 2008 through September 2009). The report provides summaries of seismic events recorded during the first three quarters of FY 2009 and a more comprehensive discussion of seismic events for the fourth quarter of FY 2009. Comprehensive discussions of seismic events recorded during the first three quarters of FY 2009 may be found in previously published quarterly reports (Rohay et al. 2009a, 2009b, 2009c).

1.1 Mission

The principal mission of the Hanford Seismic Assessment Program (HSAP) is to maintain the seismometer and strong motion accelerometer (SMA) sites, report data from measured events, and provide assistance in the event of an earthquake. This mission supports the U.S. Department of Energy (DOE) and the other Hanford Site contractors in their compliance with DOE Order 420.1B, Chapter IV, Section 3.d “Seismic Detection” and DOE Order G 420.1-1, Section 4.7, “Emergency Preparedness and Emergency Communications.” DOE Order 420.1B requires facilities or sites with hazardous materials to maintain instrumentation or other means to detect and record the occurrence and severity of the seismic event. The HSAP maintains the seismic network located on and around the Hanford Site. The data collected from the seismic network can be used to support facility or site operations to protect the public, workers, and the environment from the impact of seismic events.

In addition, the HSAP provides an uninterrupted collection of high-quality raw seismic data from the Hanford Seismic Network (HSN) and the Eastern Washington Regional Network (EWRN) and provides interpretations of seismic events from the Hanford Site and the vicinity. The program locates and identifies sources of seismic activity, monitors changes in the historical pattern of seismic activity, and builds a “local” earthquake database (processed data) that is permanently archived. The focus of this report is the precise location of earthquakes proximal to or on the Hanford Site, specifically, between 46-47° north latitude and between 119-120° west longitude. Data from the EWRN and other seismic networks in the Northwest provide the HSAP with necessary regional input for the seismic hazards analysis at the Hanford Site. These seismic data are used to support Hanford Site contractors for waste management activities, natural phenomena hazards assessments, and engineering design and construction.

1.2 History of Monitoring Seismic Activity at Hanford

Assessing seismic activity at the Hanford Site was initiated in 1969 by the U.S. Geological Survey (USGS) under a contract with the U.S. Atomic Energy Commission. In 1975, the University of Washington (UW) assumed responsibility for the network and subsequently expanded it. In 1979, the Basalt Waste Isolation Project (BWIP) became responsible for collecting seismic data for the Hanford Site as part of site characterization activities. Rockwell Hanford Operations, followed by Westinghouse Hanford Company (WHC), operated the local network and were the contract technical advisors for the EWRN operated and maintained by UW. Funding ended for BWIP in December 1988; the seismic program (including the UW contract) was transferred to the WHC Environmental Division. Maintenance responsibilities for the EWRN also were assigned to WHC, who made major upgrades to EWRN sites.

Effective October 1, 1996, all seismic assessment activities were transferred to the Pacific Northwest National Laboratory (PNNL).¹

The Hanford SMA network was constructed during 1997, becoming operational in May 1997. It was shut down in FY 1998 due to lack of funding but became operational again in FY 1999 and has operated continuously since that time.

1.3 Documentation and Reports

The HSAP issues quarterly reports of local activity, an annual catalog of earthquake activity in southeastern Washington, and special-interest bulletins on local seismic events. This includes information and special reports as requested by DOE and Hanford Site contractors. Earthquake information provided in these reports is subject to revision as new information becomes available. An archive of all seismic data from the HSAP is maintained by PNNL on computer servers.

¹ Pacific Northwest National Laboratory is operated by Battelle for the U.S. Department of Energy under Contract DE-AC05-76RL01830.

2.0 Network Operations

2.1 Seismometer Stations

The seismic network consists of two types of earthquake sensors—seismometers and strong motion accelerometers (SMAs). Seismometers are designed primarily to detect micro earthquakes near Hanford recording seismograms that are used to determine the magnitudes and locations of seismic events. SMA stations are designed to measure ground motion and are discussed in Section 2.2.

The HSN and the EWRN consist of 44 seismometer stations. This includes three recently acquired Transportable Array (TA) stations located at Cold Creek (CCRK), Didier Farms (DDRF), and Phinney Hill (PHIN). The TA stations are tri-axial, broad-band seismometers with full digital telemetry capabilities. Most stations reside in remote locations and require solar panels and batteries for power. The HSN includes 26 stations (Table 2.1 and Figure 2.1), and the EWRN consists of 39 stations (Table 2.2 and Figure 2.2). Twenty-one stations are shared by both networks. Note that the Bickelton (BLT) and Phinney Hill (PHIN) stations are shown on Figure 2.2.

The EWRN is used by the HSAP for two major reasons. A large earthquake located in the Pacific Northwest outside of Hanford could produce significant ground motion and damage at the Hanford Site. For example, the magnitude 7.0 event that occurred in 1872 near Chelan/Entiat or other events located in the region (e.g., eastern Cascade mountain range) could have such an effect. The EWRN would provide valuable information to help determine the impacts of such an event. Additionally, the characterization of seismicity throughout the surrounding areas, as required for the Probabilistic Seismic Hazard Analysis, supports facility safety assessments at the Hanford Site. Both the HSN and the EWRN are fully integrated within the Pacific Northwest Seismic Network managed by the University of Washington.

Table 2.1. Seismometer Stations in the Hanford Seismic Network

Station ^(a)	Latitude Deg. Min. N.	Longitude Deg. Min. W.	Elevation (m)	Station Name
CCRK ^(b)	46°55.85	119°85.49	560	Cold Creek
DDRF ^(b)	46°49.12	119°05.96	270	Didier Farms
FHE ^(b)	46°57.11	119°29.82	455	Frenchman Hills East
PHIN ^(b)	45°89.52	119°92.78	270	Phinney Hill
GBB ^(b)	46°36.49	119°37.62	177	Gable Butte
BEN	46°31.13	119°43.02	340	Benson Ranch
BLT	45°54.91	120°10.55	659	Bicklelton
BRV	46°29.12	119°59.47	920	Black Rock Valley
BVW	46°48.66	119°52.99	670	Beverly
CRF	46°49.50	119°23.22	189	Corfu
ET3	46°34.64	118°56.25	286	Eltopia Three
GBL	46°35.92	119°27.58	330	Gable Mountain
H2O	46°23.75	119°25.38	158	Water
LOC	46°43.02	119°25.85	210	Locke Island
MDW	46°36.79	119°45.66	330	Midway
MJ2	46°33.45	119°21.54	146	May Junction Two
OT3	46°40.14	119°13.98	322	Othello Three
PRO	46°12.73	119°41.15	550	Prosser
RED	46°17.92	119°26.30	366	Red Mountain
RSW	46°23.67	119°35.48	1,045	Rattlesnake Mountain
SNI	46°27.85	119°39.60	312	Snively Ranch
VT2	46°58.04	119°58.95	387	Vantage Two
WA2	46°45.32	119°33.94	244	Wahluke Slope
WIW	46°25.76	119°17.26	128	Wooded Island
WRD	46°58.20	119°08.69	375	Warden
YPT	46°02.93	118°57.73	325	Yellepit
(a) The first column is the alphanumeric seismic station designator. The latitude and longitude, elevation above sea level in meters, and the full station name follow this. The locations of the stations all are in Washington; locations were derived from the Global Positioning System (GPS).				
(b) Three-component station.				

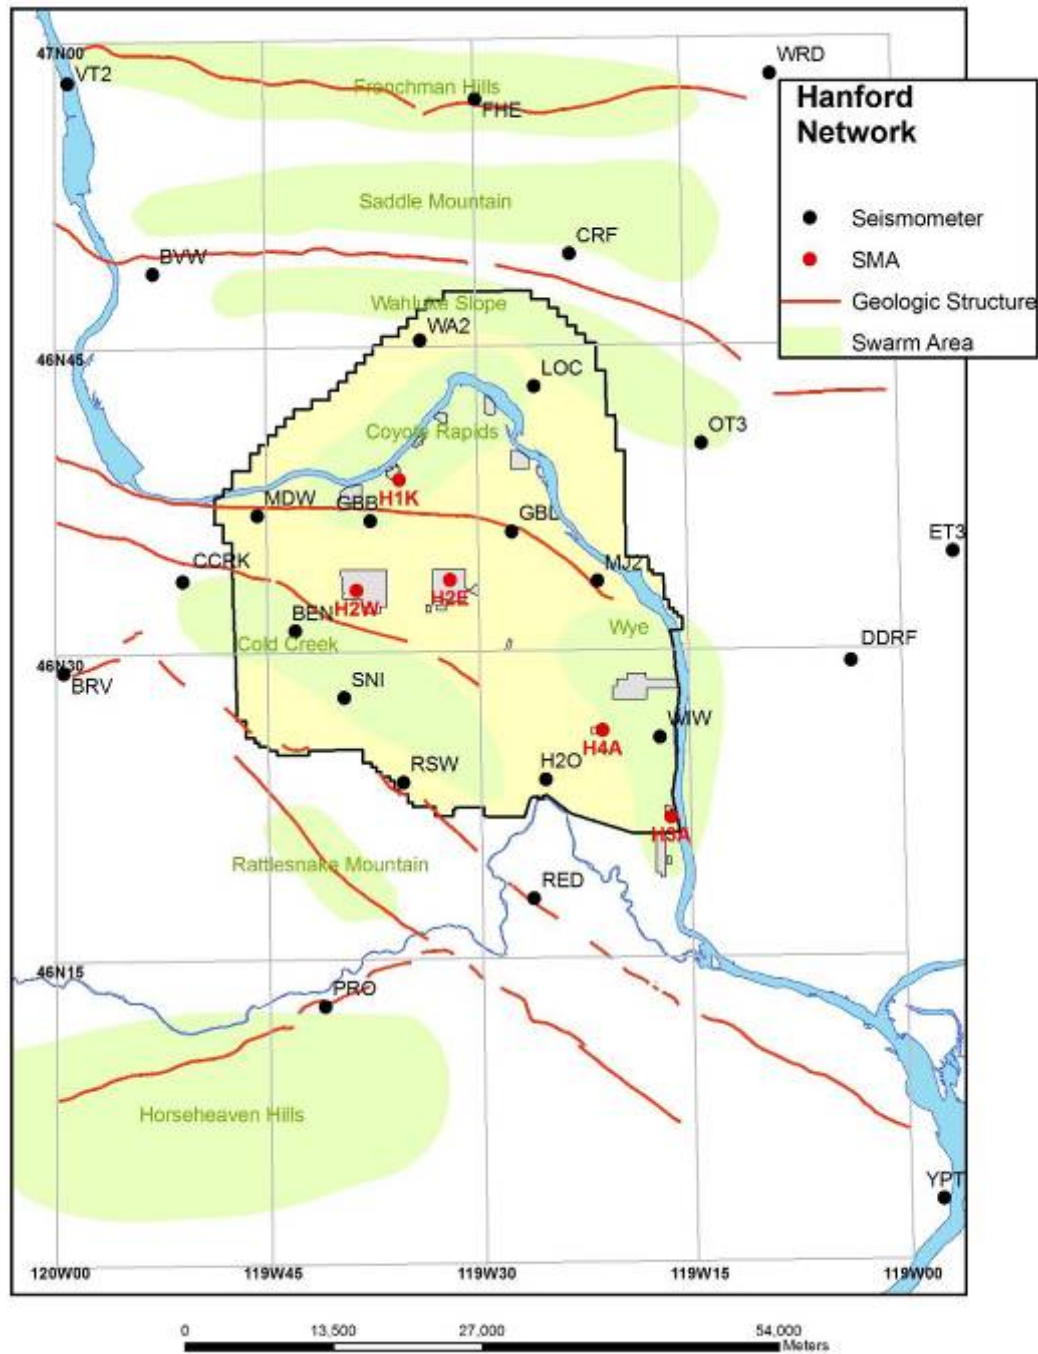


Figure 2.1. Seismometer and Strong Motion Accelerometer Stations in the Hanford Seismic Network

Table 2.2. Seismometer Stations in the Eastern Washington Regional Network

Station ^(a)	Latitude Deg. Min. N.	Longitude Deg. Min. W.	Elevation (m)	Station Name
CCRK ^(b)	46°55.85	119°85.49	560	Cold Creek
DDRF ^(b)	46°49.12	119°05.96	270	Didier Farms
FHE ^(b)	46°57.11	119°29.82	455	Frenchman Hills East
PHIN ^(b)	45°89.52	119°92.78	270	Phinney Hill
BLT	45°54.91	120°10.55	659	Bickleton
BRV	46°29.12	119°59.47	920	Black Rock Valley
BVW	46°48.66	119°52.99	670	Beverly
CBS	47°48.26	120°02.50	1,067	Chelan Butte South
CRF	46°49.50	119°23.22	189	Corfu
DPW	47°52.25	118°12.17	892	Davenport
DY2	47°59.11	119°46.28	890	Dyer Hill Two
ELL	46°54.58	120°33.98	789	Ellensburg
EPH	47°21.38	119°35.76	661	Ephrata
ET3	46°34.64	118°56.25	286	Eltopia Three
ETW	47°36.26	120°19.94	1,477	Entiat
GBL	46°35.92	119°27.58	330	Gable Mountain
LNO	45°52.31	118°17.11	771	Linton Mountain Oregon
LOC	46°43.02	119°25.85	210	Locke Island
MDW	46°36.79	119°45.66	330	Midway
MJ2	46°33.45	119°21.54	146	May Junction Two
MOX	46°34.64	120°17.89	501	Moxee City
NAC	46°43.99	120°49.42	728	Naches
NEL	48°04.21	120°20.41	1,500	Nelson Butte
OD2	47°23.26	118°42.58	553	Odessa Two
OT3	46°40.14	119°13.98	322	Othello Three
PAT2	45°53.03	119°45.40	259	Paterson Two
PRO	46°12.73	119°41.15	550	Prosser
RSW	46°23.67	119°35.48	1,045	Rattlesnake Mountain
SAW	47°42.10	119°24.03	701	St. Andrews
TBM	47°10.20	120°35.88	1,006	Table Mountain
TRW	46°17.32	120°32.31	723	Toppenish Ridge
TWW	47°08.29	120°52.10	1,027	Teanaway
VT2	46°58.04	119°58.95	387	Vantage Two
WA2	46°45.32	119°33.94	244	Wahluke Slope Two
WAT	47°41.92	119°57.24	821	Waterville
WIW	46°25.76	119°17.26	128	Wooded Island
WRD	46°58.20	119°08.69	375	Warden
YA2	46°31.60	120°31.80	652	Yakima Two
YPT	46°02.93	118°57.73	325	Yellepit
(a) The first column is the alphanumeric seismic station designator. The latitude and longitude, elevation above sea level in meters, and the full station name follow this. The locations of the stations all are in Washington unless otherwise indicated; locations were determined from the Global Positioning System (GPS).				
(b) Three-component station.				

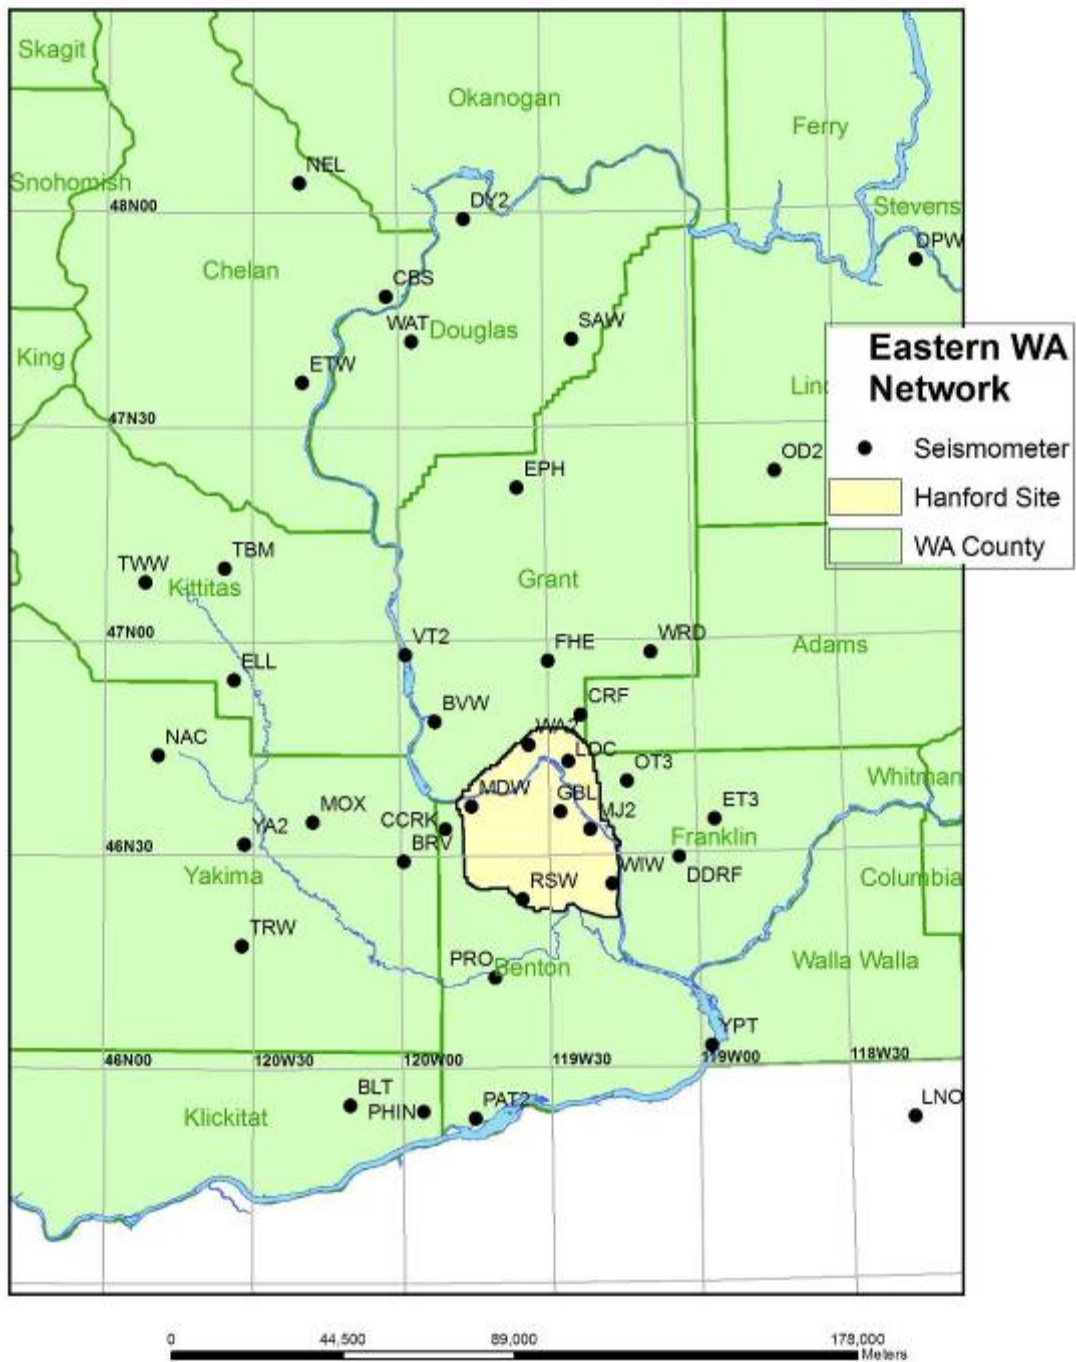


Figure 2.2. Seismometer Stations in the Eastern Washington Regional Network

The HSN and EWRN networks have 54 combined data channels because the five three-component sites (Gable Butte, Frenchman Hills East, Cold Creek, Didier Farms, and Phinney Hill) require 2 additional data channels per station. The tri-axial stations record motion in the vertical, north-south horizontal, and east-west horizontal directions. The other 39 stations are single vertical component seismometers. Fifteen radio telemetry relay sites are used by both networks to continuously transmit seismogram data to the Seismic Assessment Laboratory in the Sigma V building, Richland, Washington, for processing and archiving.

2.1.1 Station Maintenance

Fire continues to be a major threat to the seismic data collection. The fourth quarter of FY 2009 experienced another major fire in South Central Washington. The Dry Creek fire blackened 49,000 acres and burned over the newly acquired broad band station at Cold Creek (CCRK). Figure 2.3 illustrates that the fire singed the site, but fortunately did not do any major damage or cause any data loss.



Figure 2.3. Cold Creek Station (CCRK) in 2009 after Dry Creek Fire.

The annual trip to the high elevation station (4921 ft) at Nelson Butte (NEL) occurred earlier this year due to an unresponsive seismometer. The temporary repairs from the fire of last year had failed and a complete new data line was trenched into place.

The relay station located on Rattlesnake Mountain (elevation 3450 ft) was affected by the loss of power and pending demolition of Building 6552-C. The relay station remains located within Building 6552-C until demolition, however, batteries and solar panels were installed to provide power to the equipment. Two major options are being considered for relocation of the Rattlesnake Mountain relay station 1) utilizing a new tower and building being constructed by Energy Northwest on Rattlesnake Mountain or 2) moving the relay station to the Bonneville Power Administration (BPA) microwave station located in Kennewick, WA (Jump Off Joe Butte - elevation 2200 ft). Joint use lease negotiations

with BPA were initiated and planning for equipment purchases was begun in the event we pursue this option. This will insure the continuation of uninterrupted seismic data collection in Eastern Washington.

During FY 2007, the HSAP began upgrading the Hanford seismometer network with the ultimate goal of replacing analog radio telemetry with digital, internet-based telemetry. The upgrade will help eliminate the reliance on aging radio receiving and multiplexing equipment currently located in the Seismic Assessment Laboratory in the Sigma V building. The upgrade planned for the Gable Butte seismometer station (GBB) was postponed due to the swarm events recorded at Wooded Island (cf. Section 5.0). The broadband seismometer and digital telemetry equipment originally planned for the GBB station was installed at Wooded Island to better monitor the earthquake swarm and will remain there until the seismic activity subsides.

The Earthworm software system is in the process of being upgraded to release version 7. The upgrade is performed in stages with redundant computer systems in place until all software testing is performed. The improvements will include enhancements of existing Earthworm task modules. Testing of the computer components with the new software is underway.

2.1.2 Data Acquisition

The signals from the seismometer stations are monitored for changes in signal amplitude that are expected from earthquakes. The seismic network is subdivided into spatial groupings of stations that are monitored for nearly simultaneous amplitude changes, resulting in triggering a permanent recording of the events. The groupings and associated weighting schemes are designed to allow very small seismic events to be recorded and to minimize false triggers. Events are classified as local (south-central Washington near the Hanford Site), regional (western United States and Canada), and teleseisms (from farther distances around the world). Local and regional events are usually earthquakes, but quarry and mining explosions also are recorded. Quarry and mining explosions usually can be identified from wave characteristics and the time of occurrence and may be confirmed with local government agencies and industries. Frequently, military exercises at the U.S. Army Yakima Training Center produce a series of acoustic shocks that trigger the recording system. Sonic booms and thunder also produce acoustic signals that may trigger the recording system.

The HSAP uses Earthworm, a PC-based system developed by the USGS and used by the Pacific Northwest Seismic Network at the UW, to record triggered events. One Earthworm system has been in continuous operation since January 6, 1999. A second system was installed in mid-March 1999. Both systems have been running in parallel since that time, with periodic hardware and software upgrades performed. Seismogram data from triggered events are collected on a SUN workstation (Sun Microsystems, Santa Clara, California) for assessment by HSAP staff. This information is evaluated to determine if the event is “false” (for example, due to a sonic boom) or is an earthquake or ground-surface or underground blast. Earthquake events are evaluated to determine epicenter locations, focal depths, and magnitudes (Section 4).

Although the two Earthworm systems are practically identical, slight differences in the trigger algorithms, combined with the granularity of the signal-measurement time windows, sometimes result in triggered events from one Earthworm system but not the other. These different or *exclusive* events are generally “false” triggers resulting from acoustical sources and not earthquakes or quarry blasts.

Sometimes these exclusive events correspond to barely detectable, distant regional, or teleseismic earthquakes.

2.2 Strong Motion Accelerometer Stations

2.2.1 Location

The Hanford SMA network consists of five free-field SMA stations (see Figure 2.1; Table 2.3). SMAs are located in the 200 East and 200 West Areas, in the 100-K Area adjacent to the K Basins, in the 400 Area near the former Fast Flux Test Facility, and at the south end of the 300 Area.

The locations of SMA stations were chosen based on two criteria: 1) density of workers and 2) siting of hazardous facilities (Moore and Reidel 1996). The 200 East and 200 West Areas contain single-shell and double-shell tanks in which high-level radioactive wastes from past processing of fuel rods are stored. In addition, the Canister Storage Facility (holding encapsulated spent fuel rods) and the new Waste Treatment and Immobilization Plant being constructed are both located in the 200 East Area. The 100-K Area contains the K Basins, where spent fuel rods from the N Reactor were stored prior to encapsulation.

Table 2.3. Free-Field Strong Motion Accelerometer Sites

Site	Site ID	Location	Latitude Longitude Elevation
100 K Area	H1K	South of K Basins outside 100 Area fence lines	46° 38.51' 119° 35.53' 152 m
200 East Area	H2E	East of B Plant; northwest of Waste Treatment and Immobilization Plant; north of 7th Street and east of Baltimore Avenue	46° 33.58' 119° 32.00' 210 m
200 West Area	H2W	West of Plutonium Finishing Plant (PFP) and 200 West Area tree barrier	46° 33.11' 119° 38.64' 201 m
300 Area	H3A	South end of 300 Area inside fence lines (NE 1/4, SW 1/4, Sec. 11, T10N, R28E)	46° 21.83' 119° 16.55' 119 m
400 Area	H4A	500 ft from fence line on east side of facility and north of parking area)	46° 26.13' 119° 21.30' 171 m

The Cold Vacuum Drying Facility, also located in the 100-K Area, is used to encapsulate spent fuel rods from the K Basins prior to shipment to the Canister Storage Building in the 200 East Area. The 400 Area is the site of construction activities.

2.2.2 Station Design

All free-field SMA stations consist of a four-panel solar array and two 30-gal galvanized drums that contain equipment. Each panel has a maximum 42-W output. The two 30-gal drums are set in the ground such that the base of each drum is about 1 m below the ground surface. One drum houses only the SMA;

the other drum, which is connected via a sealed conduit to the SMA drum, contains the batteries. Data communication is provided by a General Packet Radio Service (GPRS) system, a continuous radio data-link to an Internet service provider. The GPRS system along with the solar power regulator is housed in a small enclosure mounted at the rear of the solar array. The enclosure serves as a junction box for all cabling between equipment inside and outside the drums through conduit. The antenna for the GPRS is mounted on top of the enclosure. The enclosure permits quick access to check battery conditions and a connection directly to the RS-232 port of the SMA without removing the drum lids.

The SMA stations are three-component units consisting of vertical, north-south horizontal, and east-west horizontal seismometers manufactured by Kinometrics, Inc., Pasadena, California, and known as the ETNA system (specifications summarized in Table 2.4). Each ETNA unit contains a digital recorder, a data storage unit, and a Global Positioning System (GPS) receiver (Figure 2.5) with the equipment housed in a watertight box.

Table 2.4. Instrument Parameters for the Kinometrics ETNA System in the Hanford SMA Network

Parameter	Value or Range
Sensor	
Type	Triaxial EpiSensor Accelerometer
Full-scale	$\pm 2 \text{ g}^{(a)}$
Frequency range	0–80 Hz
Damping	Approximately 70% critical ^(a)
Data Acquisition	
Number of channels	3
Sample rate	200 samples/sec
Resolution	18 bits
Digital output	Real-time, RS-232 output stream
Seismic Trigger	
Filter	0.1–12.5 Hz
Trigger level	$0.02\% \text{ g}^{(b)}$
Alarm (call-out) threshold	Not activated
Pre-event memory	10 s
Post-event time	40 s
(a) Setting is dependent on instrument calibration.	
(b) See Section 2.2.4 for discussion of trigger thresholds.	

The GPRS system provides the Internet address connection to access the system. Stations can be monitored from any computer with appropriate access, and data can be downloaded to a dedicated computer in the Seismic Assessment Laboratory. The data also can be downloaded directly at each site via a built-in cable connection at the enclosure in case of communication failure.

The GPS receiver is used principally to access the National Bureau of Standards timing system. The GPS receiver antenna is mounted on the enclosure at the rear of the solar array. The GPS receiver is activated internally approximately every 4 hr and checks the “location of the instrument” and the time. Any differences between the internal clock and the GPS time are recorded by the SMA. Any corrections

to the internal timing are made automatically. Typically, the greatest correction recorded is approximately 4 milliseconds (ms).

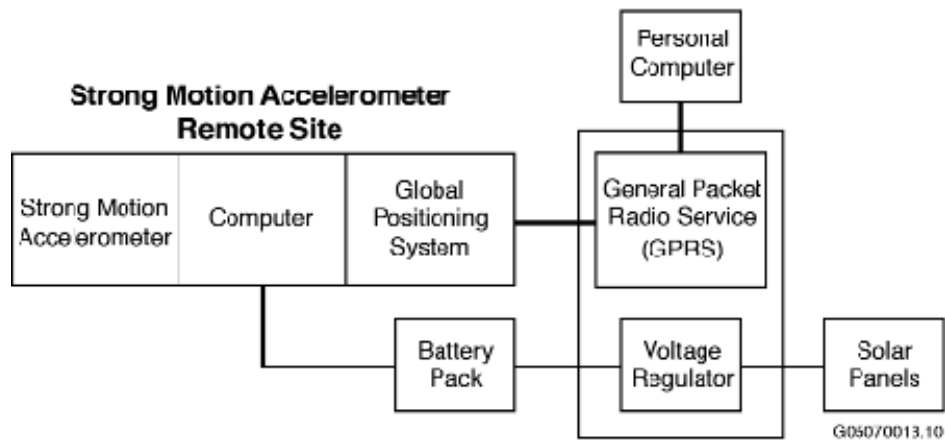


Figure 2.4. Schematic Diagram of a Strong Motion Accelerometer Installation

2.2.3 Strong Motion Accelerometer Operations Center

The combined operations, data recording, data interpretation, and maintenance facility is located in the Sigma V Building and is operated by the HSAP.

2.2.4 Strong Motion Operational Characteristics

Signals from the three accelerometer channels use an 18-bit digitizer with data temporarily stored in a memory buffer. The digital sampling rate is 200 samples/s. The three channels are monitored for signals that exceed a programmable trigger threshold. When one accelerometer channel is triggered, the other channels automatically record. The nominal threshold used from 1998 to 2006 was 0.1% g (0.05% of the full-scale range of 2.0 g; g is the acceleration of gravity, 9.8 m/s² or 32 ft/s²). Threshold trigger levels are set to trigger infrequently on noise sources (e.g., vehicles, sonic booms) near each site. In 2006, larger data storage capacities were installed that allowed the trigger thresholds to be reduced to 0.02% g (see Section 6). This permits the recording of ground motion data for smaller, non-damaging earthquakes that can be useful in estimating impacts of larger earthquakes. It also helps confirm the correct operation of the instruments by analyzing the smaller-amplitude triggers.

When one of the accelerometer channels exceeds the trigger threshold, the recorders save information within the data buffers. Data recording begins 10 s before the actual trigger time, continues until the trigger threshold is no longer exceeded, and ends with an additional 40 s of data. The saved files created by a triggered event are stored on memory cards to be retrieved and examined by HSAP staff.

3.0 Geology and Tectonic Analysis

The Hanford Site lies within the Columbia Basin, an intermontane basin between the Cascade Range and the Rocky Mountains filled with Cenozoic volcanic rocks and sediments. This basin forms the northern part of the Columbia Plateau physiographic province (Fenneman 1931) and the Columbia River flood-basalt province (Reidel et al. 1989). In the central and western parts of the Columbia Basin, the Columbia River Basalt Group (CRBG) overlies Tertiary continental sedimentary rocks and is overlain by late Tertiary and Quaternary fluvial and glaciofluvial deposits (Campbell 1989; Reidel et al. 1989, 1994; DOE 1988). In the eastern part, little or no sediment separates the basalt and underlying crystalline basement, and a thin (<10-m) veneer of eolian sediments overlies the basalt (Reidel et al. 1989, 1994).

The Columbia Basin has two structural subdivisions or subprovinces—the Yakima Fold Belt and the Palouse Slope. The Yakima Fold Belt includes the western and central parts of the Columbia Basin and is a series of anticlinal ridges and synclinal valleys with major thrust faults typically along the northern flanks (Figure 3.1) (Reidel and Fecht 1994a, 1994b). The Palouse Slope is the eastern part of the basin and is less deformed than the Yakima Fold Belt, with only a few faults and low-amplitude long-wave-length folds on an otherwise gently westward dipping paleoslope. Figure 3.2 shows north-south (B-B') and east-west (A-A') cross sections through the Columbia Basin based on surface mapping (Reidel and Fecht 1994a, 1994b), deep boreholes (Reidel et al. 1994), geophysical data (Rohay et al. 1985; DOE 1988), and magnetotelluric data obtained as part of BWIP (DOE 1988).

3.1 Earthquake Stratigraphy

Seismic studies at the Hanford Site have shown that the earthquake activity is related to crustal stratigraphy (large groupings of rock types) (Rohay et al. 1985; DOE 1988). The main geologic units important to earthquakes at the Hanford Site and the surrounding area are

- Miocene Columbia River Basalt Group
- Sub-basalt sediments of Paleocene, Eocene, Oligocene, and Early Miocene age
- Precambrian and Paleozoic cratonic basement
- Mesozoic accreted terranes forming the basement west of the craton margin.

3.2 Geologic Structure Beneath the Monitored Area

Between the late 1950s and the mid 1980s, deep boreholes were drilled for hydrocarbon exploration in the Columbia Basin. These boreholes provided accurate measurements of the physical properties of the CRBG and the pre-basalt sediments (Reidel et al. 1989, 1994), but the thickness of the sub-basalt sediments and nature of the basement are still poorly understood. Table 3.1, derived from Reidel et al. (1994), was developed for the geologic interpretation in this report. The thicknesses of these units are variable across the monitored area. Table 3.1 summarizes the approximate thickness at the borders of the monitored area.


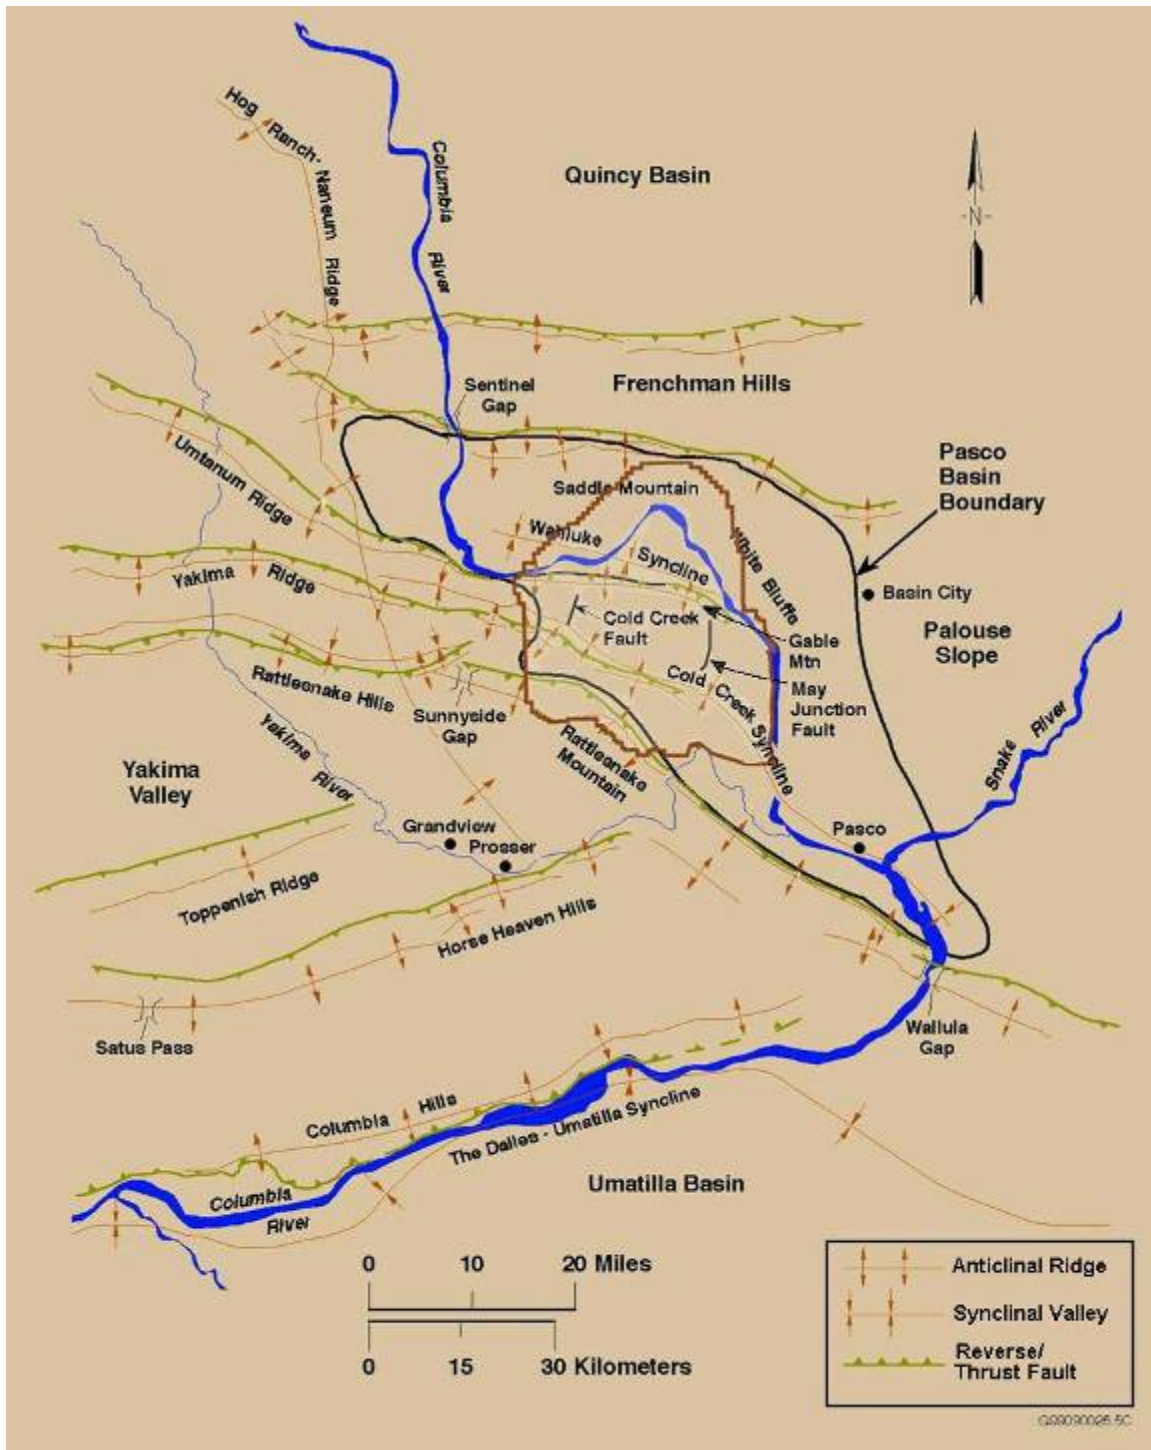


Figure 3.1. Physical and Structural Geology of the Hanford Site, Washington

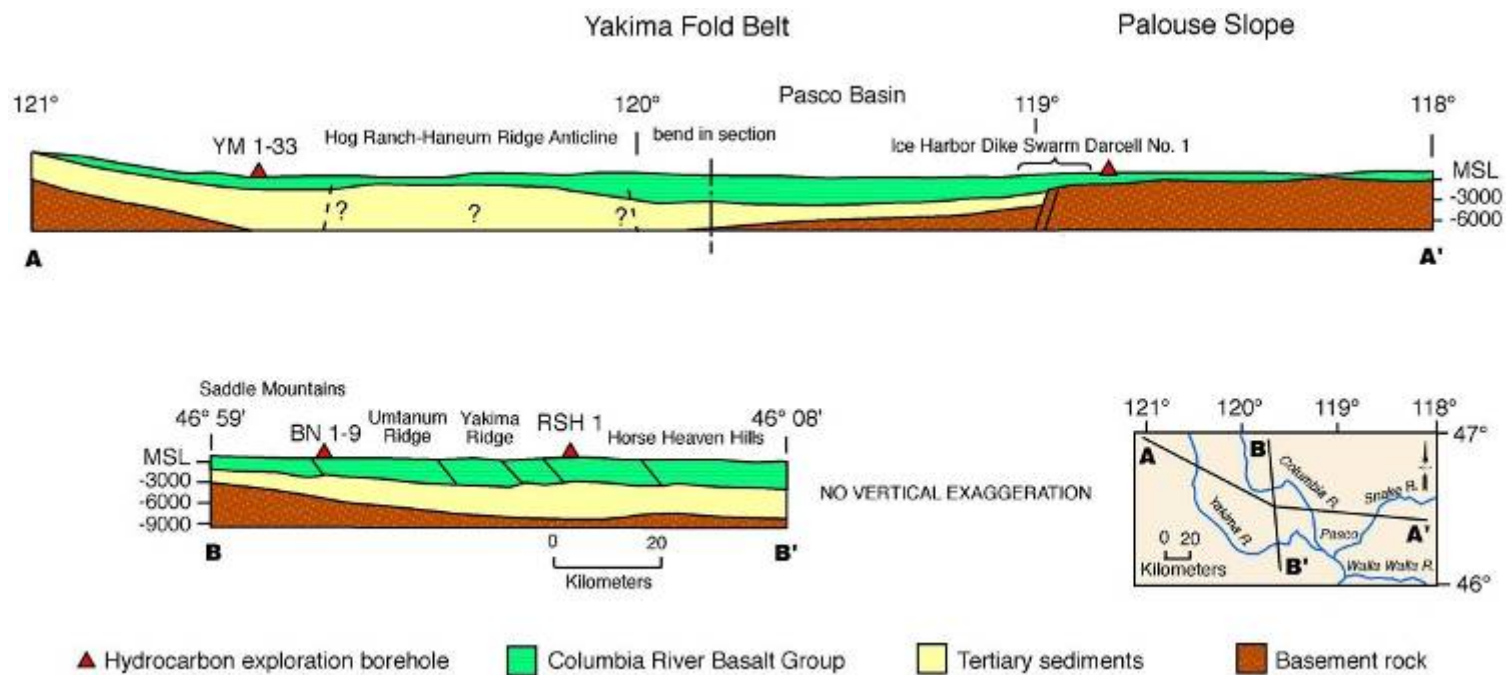

G01010082.2

Figure 3.2. Geologic Cross Sections through the Columbia Basin (Reidel et al. 1994)

Table 3.1. Thicknesses of Stratigraphic Units in the Monitoring Area (from Reidel et al. 1994)

Stratigraphy	North	South	East	West
Columbia River Basalt Group (includes suprabasalt sediments)	3.0 km	4.5 km	2.2 km	4.2 km
Pre-basalt sediments	3.0 km	>4.5 km	0	>6.0 km

The thickness of the basalt and the sub-basalt sediments varies as a result of different tectonic environments. The western edge of the North American craton (late Precambrian/Paleozoic continental margin and Precambrian craton) is located in the eastern portion of the monitored area (Reidel et al. 1994). The stratigraphy on the craton consists of CRBG overlying basement; the basement is continental crustal rock that underlies much of western North America. The stratigraphy west of the craton consists of 4 to 5 km of CRBG overlying up to 6 km of pre-basalt sediments. This in turn overlies accreted terranes of Mesozoic age. The area west of the craton was subsiding during the Eocene and Oligocene, accumulating great thickness of pre-CRBG sediments. Continued subsidence in this area during the Miocene resulted in thicker CRBG compared to that on the craton. Subsidence continues today but at a greatly reduced rate (Reidel et al. 1994).

3.3 Tectonic Pattern

Studies have concluded that earthquakes can occur in the following six different tectonic environments (earthquake sources) at the Hanford Site (Geomatrix 1996):

- **Major Geologic Structures.** Reverse/thrust faults in the CRBG associated with major anticlinal ridges such as Rattlesnake Mountain, Yakima Ridge, and Umtanum Ridge could produce some of the largest earthquakes.
- **Secondary Faults.** These faults are typically smaller (1 to 20 km in length) than the main reverse/thrust faults that occur along the major anticlinal ridges (up to 100 km in length). Secondary faults can be segment boundaries (tear faults) and small faults of any orientation that formed along with the main structure.
- **Swarm Areas.** Small geographic areas not known to contain any geologic structures produce clusters of events (swarms), usually located in synclinal valleys. These clusters consist of a series of small shocks with no outstanding principal event. Swarms occur over a period of days or months, and the events may number into the hundreds and then quit, only to start again at a later date. This differs from the sequence of foreshocks, mainshock, and trailing-off aftershocks that have the same epicenter or are associated with the same fault system. In the past, swarms were thought to occur only in the CRBG. Most swarm areas are in the basalt, but swarm events also appear to occur in all geologic layers. However, typically a swarm event at a specific time is usually restricted to one layer. Seven earthquake swarm areas are recognized in the HSN area, but this list will be updated as new swarm areas develop. The Saddle Mountains, Wooded Island, Wahluke, Coyote Rapids, and Horse Heaven Hills swarm areas are typically active at one time or another during the year (see Figure 5.2 for a map of these swarm areas). The other earthquake swarm areas are active less frequently.
- **Entire Columbia Basin.** The entire basin, including the Hanford Site, could produce a “floating” earthquake. A floating earthquake is one that, for seismic design purposes, can happen anywhere in a tectonic province and is not associated with any known geologic structure. Seismic interpretation classifies it as a random event for purposes of seismic design and vibratory ground motion studies.

- **Basement Source Structures.** Studies (Geomatrix 1996) suggest that major earthquakes can originate in tectonic structures in the basement. Because little is known about geologic structures in the basement beneath the Hanford Site, earthquakes cannot be directly tied to a mapped fault. Earthquakes occurring in the basement without known sources are treated as random events.

Cascadia Subduction Zone. This source has been postulated to be capable of producing a magnitude 9 earthquake. Because this source is along the western boundary of Washington State and outside the HSN, the Cascadia subduction zone is not an earthquake source that is monitored at the Hanford Site, so subduction zone earthquakes are not reported here. Because any earthquake along the Cascadia subduction zone can have a significant impact on the Hanford Site or can be felt like the February 2001 Nisqually earthquake, UW monitors and reports on this earthquake source for the DOE. Ground motion from any moderate or larger Cascadia subduction zone earthquake is detected by Hanford SMAs and reported (see Section 6).

4.0 Earthquake Catalog Description

An interactive program called XPED, developed at the University of Washington, is used to determine earthquake locations and magnitudes. This program reads seismogram data recorded by the Earthworm system and lets the user measure arrival times and durations from earthquakes. Arrival and duration times are used as input to the hypocenter routine within XPED to estimate locations and magnitudes of the seismic events. XPED results for local earthquakes (46-47° north latitude, 119-120° west longitude) are reported in Table 4.1; due to the great number of Wooded Island events recorded in FY 2009, only those Wooded Island events with magnitude (M_c) greater than or equal to 1.5 are listed in Table 4.1. Other seismic events located in southeastern Washington, the Pacific Northwest, or outside the region also are evaluated, with results stored on the computer system; these results are not reported in this document. These other results sometimes are used as a check to confirm that the HSN is functioning properly (e.g., quality checks on data recording).

4.1 Coda-Length Magnitude

Coda-length magnitude (M_c), an estimate of local magnitude (M_L) (Richter 1958), is calculated using a relationship developed for Washington State by Crosson (1972):

$$M_c = 2.82 \log (D) - 2.46$$

where D is the duration of the observed event. Many of the earthquakes have magnitude determinations that are very small ($M_c < 0$) and highly uncertain. In Section 4, we define earthquakes as “minor” with magnitudes (M_c) smaller than 1.0. Coda-length magnitudes for events classified as explosions are not reported because they are biased by a prominent surface wave that extends the apparent duration in a way inconsistent with coda-length measurement.

4.2 Velocity Model

XPED uses the crustal velocity model for eastern Washington given in Table 4.2. The model does not include a surficial layer for the Hanford or Ringold formations because most seismometer stations are sited on basalt. The crustal velocity model extends 38 km deep (to the mantle) and consists of six layers, each with uniform seismic velocity. The crustal velocity model was developed using available geologic information and calibrated from seismic data recorded from accurately located earthquake and blast events in eastern Washington. Time corrections (delays) are incorporated into the velocity model to account for significant deviations in station elevations or stations situated on sedimentary layers. Station delays also are determined empirically from accurately located earthquakes and blast events in the region.

Table 4.1. Local Seismic Data, October 1, 2008 – September 30, 2009

Type	Date	Time	Latitude	Longitude	Depth	Mag	NS/NP	Gap	Dmin	RMS	Q	Location
	08/10/03	12:26:03.18	46N09.04	119W22.58	12.00	0.6	7/09	218	16	0.04	AD	16 km SSW of Richland
	08/10/04	18:44:33.3	46N09.41	119W22.24	10.73	0.2	7/09	216	16	0.05	AD	15 km SSW of Richland
	08/10/08	00:30:45.67	46N08.85	119W22.87	10.79	0.6	8/10	219	17	0.05	AD	17 km SSW of Richland
	08/10/25	22:37:49.55	46N36.16	119W40.66	4.14	-0.6	4/08	159	3	0.05	AD	6 km NNW of 200 West
X	08/11/05	20:16:00.39	46N11.46	119W27.94	2.23		9/09	250	12	0.11	BD	17 km SW of Richland
P	08/11/17	22:08:31.95	46N14.40	119W27.52	0.41		5/05	245	6	0.56	DD	14 km WSW of Richland
	08/11/18	19:42:42.82	46N07.83	119W10.44	7.42	0.5	8/11	193	18	0.12	BD	9 km SSW of Kennewick
P	08/11/18	21:23:46.22	46N12.95	119W23.43	0.25		5/05	149	9	0.15	AD	11 km SW of Richland
	08/11/28	05:55:40.04	46N42.83	119W34.22	4.77	0.1	6/07	142	4	0.05	AC	8 km NNE of 100-K
	08/11/29	13:03:09.27	46N20.36	119W40.66	3.56	0.6	9/10	165	9	0.11	BC	16 km NNE of Prosser
	08/12/08	06:30:15.73	46N19.35	119W41.17	2.14	-0.1	6/09	251	10	0.06	BD	14 km NNE of Prosser
	08/12/23	02:46:42.29	46N19.44	119W31.02	5.44	0.1	9/12	110	6	0.07	AB	17 km SW of 400 Area
X	08/12/23	19:51:58.31	46N08.96	119W10.82	0.96		11/11	156	20	0.15	AC	7 km SW of Kennewick
	08/12/25	12:25:17.16	46N19.40	119W30.73	6.42	0.1	5/09	205	6	0.07	AD	17 km SW of 400 Area
	09/01/04	01:32:04.64	46N24.58	119W16.78	1.08	1.6	20/020	86	2	0.06	AA	Wooded Island Swarm
X	09/01/13	17:37:59.98	46N09.22	119W10.77	1.05		7/007	154	20	0.06	AC	7 km SW of Kennewick
	09/01/26	20:24:01.23	46N24.72	119W17.07	1.31	1.6	17/017	85	1	0.1	AA	Wooded Island Swarm
	09/02/06	09:42:29.94	46N23.44	119W27.13	17.00	0.5	12/015	97	2	0.06	AB	17 km NW Richland
	09/02/10	07:41:21.10	46N24.57	119W16.78	1.34	2.4	22/022	86	2	0.08	AA	Wooded Island Swarm
	09/02/12	18:53:21.07	46N24.73	119W17.27	0.95	1.5	13/013	96	1	0.07	AB	Wooded Island Swarm
	09/02/12	20:36:53.91	46N24.77	119W17.22	1.28	2.1	22/022	84	1	0.08	AA	Wooded Island Swarm
	09/02/16	06:58:09.95	46N24.51	119W17.28	1.18	1.7	22/022	85	2	0.07	AA	Wooded Island Swarm
	09/02/16	06:58:09.96	46N24.51	119W17.32	0.96	1.5	19/021	85	2	0.09	AA	Wooded Island Swarm
	09/02/16	07:43:26.85	46N24.55	119W17.26	1.29	2.0	16/016	85	2	0.06	AA	Wooded Island Swarm
P	09/02/16	17:56:33.20	46N01.78	119W54.89	0.03		8/008	91	15	0.14	BC	23 km SSW of Prosser
	09/02/21	16:52:26.00	46N24.45	119W17.31	1.79	2.9	20/025	85	2	0.09	AA	Wooded Island Swarm
	09/02/23	01:28:00.33	46N24.63	119W16.72	1.39	1.6	23/023	86	2	0.08	AA	Wooded Island Swarm
	09/02/27	18:20:51.65	46N37.09	119W17.87	15.84	0.1	15/016	69	7	0.08	AA	25 km SSW of Othello
	09/03/07	17:27:53.02	46N24.22	119W16.87	0.41	2.1	21/021	87	1	0.05	AA	Wooded Island Swarm
	09/03/07	17:33:37.07	46N23.96	119W16.73	0.40	2.1	19/019	108	1	0.08	AB	Wooded Island Swarm
	09/03/08	09:30:04.25	46N24.56	119W16.73	1.54	2.4	18/021	86	2	0.09	AA	Wooded Island Swarm
	09/03/08	14:41:41.20	46N12.12	119W36.81	8.16	0.1	16/021	106	5	0.11	AB	12 km E of Prosser
	09/03/08	15:42:13.16	46N24.26	119W16.39	0.43	2.1	19/022	89	1	0.1	AA	Wooded Island Swarm
	09/03/09	05:28:36.45	46N24.53	119W16.49	1.49	2.1	19/022	87	2	0.09	AA	Wooded Island Swarm
	09/03/10	21:56:15.94	46N24.36	119W16.84	0.42	2.1	19/020	87	2	0.12	AA	Wooded Island Swarm
	09/03/10	23:00:41.52	46N24.09	119W16.80	1.34	1.9	17/020	106	1	0.07	AB	Wooded Island Swarm
	09/03/12	03:37:14.40	46N23.98	119W16.69	0.38	1.7	19/019	110	1	0.06	AB	Wooded Island Swarm
	09/03/12	05:47:14.24	46N24.02	119W16.73	1.56	2.0	14/018	108	1	0.1	AB	Wooded Island Swarm
	09/03/12	17:39:54.60	46N24.38	119W16.57	1.05	2.8	19/022	88	2	0.12	AA	Wooded Island Swarm
	09/03/13	02:10:04.82	46N24.36	119W16.26	1.21	2.1	20/021	89	2	0.09	AA	Wooded Island Swarm
	09/03/13	15:38:31.51	46N23.83	119W16.57	0.05	1.8	18/021	89	1	0.08	AA	Wooded Island Swarm
	09/03/13	19:25:52.31	46N24.00	119W16.59	0.42	2.3	16/019	115	1	0.09	AB	Wooded Island Swarm
	09/03/14	15:02:23.21	46N24.09	119W17.16	0.14	1.5	23/023	87	1	0.08	AA	Wooded Island Swarm
	09/03/15	11:08:48.58	46N24.21	119W16.50	0.23	1.6	15/015	95	3	0.08	AB	Wooded Island Swarm

Table 4.1. Local Seismic Data, October 1, 2008 – September 30, 2009 (*continued*)

Type	Date	Time	Latitude	Longitude	Depth	Mag	NS/NP	Gap	Dmin	RMS	Q	Location
	09/03/15	15:54:05.37	46N24.12	119W17.10	1.03	1.6	16/016	93	3	0.1	AB	Wooded Island Swarm
	09/03/15	17:58:05.65	46N24.09	119W16.88	0.31	1.6	15/015	94	3	0.07	AB	Wooded Island Swarm
	09/03/16	05:42:31.89	46N23.91	119W16.54	0.29	1.7	16/016	95	3	0.1	AB	Wooded Island Swarm
	09/03/16	07:31:19.59	46N23.90	119W17.03	1.65	2.5	16/016	94	3	0.08	AB	Wooded Island Swarm
	09/03/16	22:29:52.23	46N24.25	119W16.99	0.26	1.5	16/016	93	2	0.11	AB	Wooded Island Swarm
	09/03/17	05:04:29.04	46N23.97	119W16.61	1.07	2.3	23/023	89	1	0.07	AA	Wooded Island Swarm
	09/03/18	06:40:31.91	46N24.37	119W16.60	1.17	2.9	17/017	115	2	0.05	AB	Wooded Island Swarm
	09/03/18	06:48:48.24	46N24.32	119W16.10	1.87	2.8	17/017	133	2	0.09	AB	Wooded Island Swarm
	09/03/18	14:09:16.48	46N24.56	119W16.42	1.45	1.5	13/015	120	2	0.08	AB	Wooded Island Swarm
	09/03/18	14:15:10.89	46N24.51	119W16.55	1.28	1.6	13/015	116	2	0.09	AB	Wooded Island Swarm
	09/03/18	14:16:19.44	46N24.56	119W16.49	0.36	1.6	4/006	118	2	0.06	AD	Wooded Island Swarm
	09/03/18	14:20:07.95	46N24.34	119W16.44	0.39	1.8	15/016	121	2	0.11	AB	Wooded Island Swarm
	09/03/18	14:22:36.28	46N24.58	119W16.66	1.20	1.5	16/016	113	2	0.08	AB	Wooded Island Swarm
	09/03/19	06:26:27.43	46N24.80	119W17.52	0.41	1.9	23/023	83	1	0.1	AA	Wooded Island Swarm
	09/03/21	10:11:37.61	46N51.98	119W31.41	16.73	2.3	38/045	45	9	0.13	AA	28 km W of Othello
	09/03/23	18:17:24.86	46N23.63	119W16.08	1.03	2.0	18/020	92	0	0.06	AB	Wooded Island Swarm
	09/03/24	10:52:19.89	46N23.59	119W18.00	1.61	1.6	11/013	114	2	0.06	AB	Wooded Island Swarm
	09/03/24	11:13:53.10	46N23.68	119W16.38	0.94	1.6	20/020	91	0	0.07	AB	Wooded Island Swarm
	09/03/25	23:02:42.44	46N23.45	119W16.86	0.37	1.9	18/023	82	0	0.05	AA	Wooded Island Swarm
	09/03/26	07:26:10.69	46N23.56	119W17.25	0.78	1.6	11/014	104	1	0.04	AB	Wooded Island Swarm
	09/03/26	09:19:10.07	46N23.62	119W17.08	1.36	1.7	16/021	92	1	0.08	AB	Wooded Island Swarm
	09/03/30	08:11:58.09	46N24.01	119W16.72	1.37	1.6	18/020	88	1	0.07	AA	Wooded Island Swarm
	09/03/31	04:34:23.20	46N23.82	119W18.25	0.30	1.7	17/019	77	2	0.08	AA	Wooded Island Swarm
	09/03/31	10:25:10.86	46N24.55	119W18.14	0.05	1.6	14/014	83	2	0.07	AA	Wooded Island Swarm
	09/04/03	06:31:55.76	46N24.53	119W17.29	1.15	2.4	22/22	85	2	0.1	AA	Wooded Island Swarm
	09/04/03	19:28:41.79	46N23.55	119W16.93	0.16	2.0	19/19	81	0	0.12	AA	Wooded Island Swarm
	09/04/04	07:56:85.96	46N23.80	119W17.61	1.44	2.6	20/24	78	1	0.07	AA	Wooded Island Swarm
	09/04/04	10:55:62.06	46N23.94	119W17.65	0.40	2.4	21/21	77	2	0.06	AA	Wooded Island Swarm
	09/04/04	16:05:92.77	46N23.56	119W17.23	1.50	2.3	21/21	80	1	0.09	AA	Wooded Island Swarm
	09/04/07	04:30:55.60	46N24.32	119W17.80	0.41	2.1	23/23	78	2	0.08	AA	Wooded Island Swarm
	09/04/07	08:29:85.31	46N23.60	119W17.05	0.11	1.8	14/14	93	1	0.1	AB	Wooded Island Swarm
	09/04/07	10:23:47.26	46N24.77	119W17.69	0.96	2.0	23/23	83	1	0.09	AA	Wooded Island Swarm
	09/04/07	11:04:53.74	46N24.79	119W17.62	0.96	2.2	18/21	83	1	0.05	AA	Wooded Island Swarm
	09/04/07	11:41:90.91	46N24.54	119W17.56	1.42	2.2	23/24	84	2	0.1	AA	Wooded Island Swarm
	09/04/07	23:19:53.78	46N24.71	119W17.38	0.04	2.2	23/23	84	1	0.07	AA	Wooded Island Swarm
	09/04/07	23:27:46.54	46N24.06	119W17.80	0.18	2.5	24/24	76	2	0.07	AA	Wooded Island Swarm
	09/04/07	23:39:52.14	46N23.86	119W17.80	0.43	1.8	21/22	77	2	0.11	AA	Wooded Island Swarm
	09/04/08	04:03:93.73	46N24.19	119W15.90	2.08	2.8	23/23	90	1	0.09	AA	Wooded Island Swarm
	09/04/10	18:25:42.58	46N23.14	119W16.77	0.04	1.9	17/20	84	0	0.07	AA	Wooded Island Swarm
	09/04/14	10:54:71.48	46N23.13	119W16.53	0.24	1.8	19/19	92	0	0.08	AB	Wooded Island Swarm
	09/04/14	12:22:76.46	46N23.87	119W17.67	0.03	2.3	19/19	78	1	0.06	AA	Wooded Island Swarm
	09/04/15	10:09:49.30	46N23.59	119W17.30	0.19	1.5	19/25	103	1	0.05	AB	Wooded Island Swarm
	09/04/17	22:24:52.95	46N28.88	119W35.19	19.07	-0.3	13/15	110	9	0.03	AB	9 km SSE of 200 West
	09/04/28	02:54:59.72	46N24.04	119W17.10	0.03	1.7	20/24	87	1	0.12	AA	Wooded Island Swarm

Table 4.1. Local Seismic Data, October 1, 2008 – September 30, 2009 (*continued*)

Type	Date	Time	Latitude	Longitude	Depth	Mag	NS/NP	Gap	Dmin	RMS	Q	Location
	09/04/29	16:51:19.59	46N42.54	119W34.59	4.42	0.7	24/26	73	5	0.12	AB	8 km NNE of 100
	09/05/03	18:08:74.49	46N24.63	119W18.21	0.03	1.6	17/17	79	2	0.05	AA	Wooded Island Swarm
	09/05/04	10:47:42.51	46N24.77	119W16.38	2.19	2.9	20/23	87	2	0.09	AA	Wooded Island Swarm
	09/05/05	06:35:86.70	46N23.21	119W16.16	0.29	2.1	21/25	93	0	0.06	AB	Wooded Island Swarm
	09/05/07	14:25:00.12	46N24.31	119W18.17	1.16	1.7	8/10	165	2	0.08	AC	Wooded Island Swarm
	09/05/08	10:58:44.53	46N23.41	119W16.88	0.07	2.1	20/22	82	0	0.05	AA	Wooded Island Swarm
	09/05/08	11:41:59.54	46N24.22	119W17.57	0.42	1.6	24/24	81	2	0.06	AA	Wooded Island Swarm
	09/05/09	16:33:17.24	46N17.48	119W41.48	0.43	0.4	7/10	174	8	0.1	AC	11 km NNE of Prosser
	09/05/12	15:56:92.76	46N24.27	119W17.01	1.13	2.0	22/22	87	2	0.08	AA	Wooded Island Swarm
	09/05/12	16:56:75.83	46N24.37	119W16.97	1.02	2.1	23/23	86	2	0.08	AA	Wooded Island Swarm
	09/05/12	20:41:87.42	46N24.29	119W16.97	0.98	2.1	24/24	87	2	0.08	AA	Wooded Island Swarm
	09/05/13	07:15:63.24	46N24.63	119W16.75	1.48	1.9	19/21	86	2	0.09	AA	Wooded Island Swarm
	09/05/13	07:29:63.25	46N24.19	119W17.08	0.40	1.5	23/23	87	1	0.07	AA	Wooded Island Swarm
	09/05/13	07:44:72.99	46N24.38	119W17.11	1.78	3.0	20/24	86	2	0.1	AA	Wooded Island Swarm
	09/05/13	07:50:55.64	46N24.32	119W16.98	1.86	2.6	20/23	86	2	0.08	AA	Wooded Island Swarm
	09/05/13	14:05:74.22	46N24.00	119W17.14	0.02	1.6	24/24	87	1	0.1	AA	Wooded Island Swarm
	09/05/13	15:25:94.25	46N23.95	119W16.97	0.91	1.8	23/24	88	1	0.08	AA	Wooded Island Swarm
	09/05/14	01:04:80.28	46N24.02	119W17.71	1.48	1.5	22/22	77	2	0.07	AA	Wooded Island Swarm
	09/05/14	20:00:46.06	46N42.68	119W34.34	3.24	0.3	14/17	87	4	0.07	AA	8 km NNE of 100-K
	09/05/15	02:15:49.61	46N24.38	119W16.46	1.43	2.0	21/21	88	2	0.09	AA	Wooded Island Swarm
	09/05/15	02:26:04.80	46N24.37	119W16.19	1.67	1.9	21/22	89	2	0.07	AA	Wooded Island Swarm
	09/05/16	09:00:36.28	46N24.10	119W17.92	0.43	1.7	11/11	167	3	0.08	AC	Wooded Island Swarm
	09/05/16	09:02:31.92	46N24.07	119W17.96	0.49	2.1	17/17	91	3	0.12	AB	Wooded Island Swarm
	09/05/16	09:10:12.74	46N24.05	119W17.74	0.02	2.6	23/23	76	2	0.09	AA	Wooded Island Swarm
	09/05/17	01:11:73.13	46N23.55	119W17.66	0.03	1.7	20/20	80	1	0.13	AA	Wooded Island Swarm
	09/05/17	01:11:92.94	46N23.94	119W17.38	0.02	1.7	14/17	79	1	0.06	AA	Wooded Island Swarm
	09/05/17	17:55:42.49	46N23.62	119W17.30	1.21	2.0	21/21	80	1	0.08	AA	Wooded Island Swarm
	09/05/19	03:15:60.59	46N24.28	119W16.47	0.42	1.5	21/21	88	1	0.11	AA	Wooded Island Swarm
	09/05/27	10:25:08.58	46N28.00	119W40.56	18.42	-0.3	13/16	165	1	0.09	AC	11 km SSW of 200 West
	09/06/01	12:11:42.10	46N44.18	119W26.33	0.04	-0.9	5/08	142	2	0.26	BD	16 km NE of 100-K
P	09/06/04	19:14:35.43	46N16.51	119W23.38	1.96		16/16	177	4	0.14	AC	8 km W of Richland
P	09/06/09	17:19:55.86	46N17.00	119W24.31	2.83		6/06	220	2	0.05	AD	9 km W of Richland
	09/06/10	09:25:49.05	46N42.48	119W34.64	1.32	2.5	31/35	36	5	0.1	AB	8 km NNE of 100-K
	09/07/04	13:58:28.71	46N27.03	119W35.27	15.23	-0.4	9/09	125	5	0.07	AB	13 km SSE of 200 West
	09/07/13	12:30:12.20	46N13.12	119W39.03	15.78	0.2	12/15	148	18	0.06	AC	9 km E of Prosser
	09/07/22	19:00:00.47	46N24.91	119W16.18	1.84	1.5	21/21	87	2	0.09	AA	Wooded Island Swarm
	09/07/23	11:11:03.97	46N24.85	119W16.21	2.30	2.5	23/24	87	2	0.07	AA	Wooded Island Swarm
	09/07/30	07:34:43.43	46N28.07	119W46.48	18.83	-0.2	4/05	271	7	0.04	AD	15 km SW of 200 West
	09/08/09	02:28:08.49	46N38.59	119W22.91	15.04	-0.6	17/22	49	7	0.09	AA	15 km NE of 200 East
	09/08/09	02:45:54.82	46N18.72	119W30.21	17.97	0.8	19/20	107	5	0.15	AB	17 km W of Richland
	09/08/15	22:06:15.86	46N08.54	119W02.00	12.45	1.2	8/14	143	11	0.12	AC	10 km SE of Kennewick
	09/08/19	09:54:10.85	46N30.72	119W39.83	20.27	-0.1	12/12	123	4	0.06	AB	6 km SSW of 200 West
	09/08/19	10:35:08.39	46N26.08	119W20.98	16.00	-0.5	11/13	77	7	0.09	AA	1 km E of 400 Area
	09/08/24	19:11:06.75	46N44.10	119W27.52	0.02	-0.1	6/10	104	2	0.10	AC	15 km NE of 100-K Area

Table 4.1. Local Seismic Data, October 1, 2008 – September 30, 2009 (*continued*)

Type	Date	Time	Latitude	Longitude	Depth	Mag	NS/NP	Gap	Dmin	RMS	Q	Location
P	09/08/27	21:43:56.08	46N14.90	119W27.74	2.11		10/10	207	5	0.14	AD	14 km WSW of Richland
	09/09/01	06:26:06.36	46N23.94	119W16.03	1.16	2.1	19/20	91	1	0.05	AB	Wooded Island Swarm
	09/09/03	12:25:39.27	46N23.94	119W16.17	0.91	1.5	19/20	90	1	0.08	AA	Wooded Island Swarm
	09/09/07	10:39:31.14	46N47.34	119W53.87	3.12	1.4	22/22	59	2	0.14	AA	20 km SSE of Vantage
	09/09/09	20:18:05.48	46N44.85	119W20.88	5.56	-0.5	4/06	201	7	0.11	BD	16 km WSW of Othello
	09/09/09	20:19:51.02	46N50.36	119W08.18	18.50	-0.3	4/06	296	19	0.14	BD	3 km ENE of Othello
	09/09/11	19:34:52.58	46N24.93	119W16.41	2.01	2.7	20/27	86	1	0.09	AA	Wooded Island Swarm
	09/09/19	13:15:59.32	46N29.66	119W39.94	8.83	0.2	12/16	123	3	0.09	AB	7 km SSW of 200 West
	09/09/19	19:25:27.13	46N29.72	119W39.84	8.77	-0.1	12/15	120	3	0.06	AB	7 km SSW of 200 West
	09/09/19	19:29:25.17	46N29.71	119W40.10	9.19	0.2	13/19	126	3	0.07	AB	7 km SSW of 200 West
	09/09/19	19:47:32.70	46N29.75	119W39.98	8.05	0.8	13/18	123	3	0.05	AB	7 km SSW of 200 West
	09/09/19	19:50:27.48	46N29.64	119W39.88	9.00	-0.8	6/07	125	3	0.06	AC	7 km SSW of 200 West
	09/09/19	19:51:06.63	46N29.94	119W39.68	7.43	-0.9	7/09	128	3	0.09	AB	7 km SSW of 200 West
	09/09/19	20:00:49.33	46N29.98	119W39.78	7.13	-0.9	5/07	164	3	0.04	AD	7 km SSW of 200 West
	09/09/19	20:02:31.70	46N29.76	119W39.97	7.82	0.8	17/20	123	3	0.05	AB	7 km SSW of 200 West
	09/09/19	20:23:01.26	46N29.74	119W39.94	9.39	0.3	12/13	122	3	0.06	AB	7 km SSW of 200 West
	09/09/19	23:42:08.74	46N29.76	119W39.34	7.84	-0.5	7/09	130	3	0.02	AB	7 km S of 200 West

Explanation of Table 4.1

Type:	P is Probable Blast; X is Confirmed Blast; blank is local earthquake.
Date:	The year and date in Universal Time Coordinated (UTC). UTC is used throughout this report unless otherwise indicated.
Time:	The origin time of the earthquake given in Coordinated Universal Time (UTC). To covert UTC to Pacific Standard Time, subtract eight hours; to Pacific Daylight Time, subtract seven hours.
Latitude:	North latitude, in degrees and minutes, of the earthquake epicenter.
Longitude:	West longitude, in degrees and minutes, of the earthquake epicenter.
Depth:	The depth of the earthquake in kilometers (km).
Mag:	The magnitude is expressed as coda-length magnitude M_c , an estimate of local magnitude M_L (Richter 1958). If magnitude is blank, a determination was not made.
NS/NP:	Number of stations/number of phases used in the solutions.
Gap:	Azimuthal gap; the largest angle (relative to the epicenter) containing no stations.
DMIN:	The distance from the earthquake epicenter to the closest station.
RMS:	The root-mean-square residual (observed arrival times minus the predicted arrival times) at all stations used to locate the earthquake. It is useful as a measure of quality of the solution only when five or more well-distributed stations are used in the solution. Good solutions are normally characterized by RMS values of less than about 0.3 s.
Q:	Quality factors; indicate the general reliability of the solution/location (A is best quality, D is worst). See Section 4.3 of this report, "Quality Factors."

4.3 Quality Factors (Q)

XPED assigns a two-letter **Quality factor** (Table 4.1) that indicates the general reliability of the solution (**A** is best quality, **D** is worst). Similar quality factors are used by the USGS for events located with the computer program HYPO71. The first letter of the quality code is a measure of the hypocenter quality based primarily on arrival time residuals. For example: Quality **A** requires a root-mean-square residual (**RMS**) less than 0.15 s, while a **RMS** of 0.5 s or more is **D** quality (other estimates of the location uncertainty also affect this quality parameter). The second letter of the quality code is related to the spatial distribution of stations that contribute to the event location, including the number of stations (**NS**), the number of p-wave and s-wave phases (**NP**), the largest gap in event-station azimuth distribution (**GAP**), and the closest distance from the epicenter to a station (**DMIN**). Quality **A** requires a solution with **NP** >8, **GAP** <90°, and **DMIN** <5 km (or the hypocenter depth if it is greater than 5 km). If **NP** ≤5, **GAP** >180°, or **DMIN** >50 km, the solution is assigned Quality **D**.

Uncertainties associated with estimated depths depend upon the number of stations and number of phase measurements (**NS/NP**) utilized in the XPED calculation. Generally speaking, if the number of phases exceeds 10 measurements, the depth estimate is considered to be reliable. In this case the second letter in the quality evaluation is either “A” or “B” (cf. Table 4.1). For example, the number of phase measurements from earthquakes ultimately classified as “deep” events typically falls within the 10-20 measurement range; these depth estimates are considered reliable. However, the number of phase measurements from earthquakes classified as “shallow” or “intermediate” may be less than 10 readings; in this case the depth estimate is less certain and the event could be classified as occurring in the CRBG or pre-basalt layers.

Table 4.2. Crustal Velocity Model for Eastern Washington (from Rohay et al. 1985)

Depth to Top of Velocity Layer (km)	Layer	Velocity (km/s)
0.0	Saddle Mountains and Wanapum Basalts and intercalated Ellensburg Formation	3.7
0.4	Grande Ronde Basalt and pre-basalt sediments	5.2
8.5	Basement, Layer 1	6.1
13.0	Basement, Layer 2	6.4
23.0	Sub-basement	7.1
38.0	Mantle	7.9

5.0 Seismic Activity – FY 2009

5.1 Summary

During FY 2009, the Hanford Seismic Network recorded nearly 3000 triggers on the seismometer system, which included over 1700 seismic events in the southeast Washington area and an additional 370 regional and teleseismic events. There were 1648 events determined to be local earthquakes relevant to the Hanford Site. Nearly all of these earthquakes were detected in the vicinity of Wooded Island, located about eight miles north of Richland just west of the Columbia River. Recording of the Wooded Island events began in January with over 250 events per month through June 2009. The frequency of events decreased starting in July 2009 to approximately 10-15 events per month through September 2009. Most of the events were considered minor (coda-length magnitude [M_c] less than 1.0) with 47 events in the 2.0-3.0 range. The estimated depths of the Wooded Island events are shallow (averaging less than 1.0 km deep) with a maximum depth estimated at 2.3 km. This places the Wooded Island events within the Columbia River Basalt Group (CRBG).

The highest-magnitude event ($3.0M_c$) occurred on May 13, 2009 within the Wooded Island swarm at depth 1.8 km. The depth distribution and geographic pattern of the 1648 earthquakes that occurred in the Hanford monitoring area are classified in Table 5.1 and Table 5.2.

With regard to the depth distribution, 1613 earthquakes were located at shallow depths (less than 4 km, most likely in the Columbia River basalts), 16 earthquakes were located at intermediate depths (between 4 and 9 km, most likely in the pre-basalt sediments), and 19 earthquakes were located at depths greater than 9 km, within the crystalline basement. Geographically, 1630 earthquakes were located in swarm areas and 18 earthquakes were classified as random events.

Table 5.1. Depth Distribution of Earthquakes for FY 2009

Category	First Quarter	Second Quarter	Third Quarter	Fourth Quarter	FY 2009
Shallow (0-4 km deep)	2	800	768	43	1613 (98%)
Intermediate (4-9 km deep)	5	1	1	9	16 (1%)
Deep (greater than 9 km deep)	3	3	2	11	19 (1%)
Total	10	804	771	63	1648 (100%)

Table 5.2. Earthquake Locations for FY 2009

Seismic Sources		First Quarter 10/01–12/31	Second Quarter 1/01–3/31	Third Quarter 4/01–6/30	Fourth Quarter 7/01–9/30	FY 2009
Geologic Structure			-	-	-	
Swarm Areas	Frenchman Hills					
	Saddle Mountains/ Royal Slope		1			1
	Wahluke Slope				1	1
	Coyote Rapids	2		3	1	6
	Wye		800	764	41	1605
	Cold Creek			2	12	14
	Rattlesnake Mountain.	2				2
	Horse Heaven Hills		1			1
	Total for swarm areas	4	802	769	55	1630 (99%)
Random Events		6	2	2	8	18(1%)
Total for all earthquakes		10	804	771	63	1648

Table 4.1 includes all events that were recorded within the Hanford monitored area during FY 2009. Only those Wooded Island events with magnitude (M_c) greater than or equal to 1.5 are included in Table 4.1. Figure 5.1 shows the locations of events listed in Table 4.1.

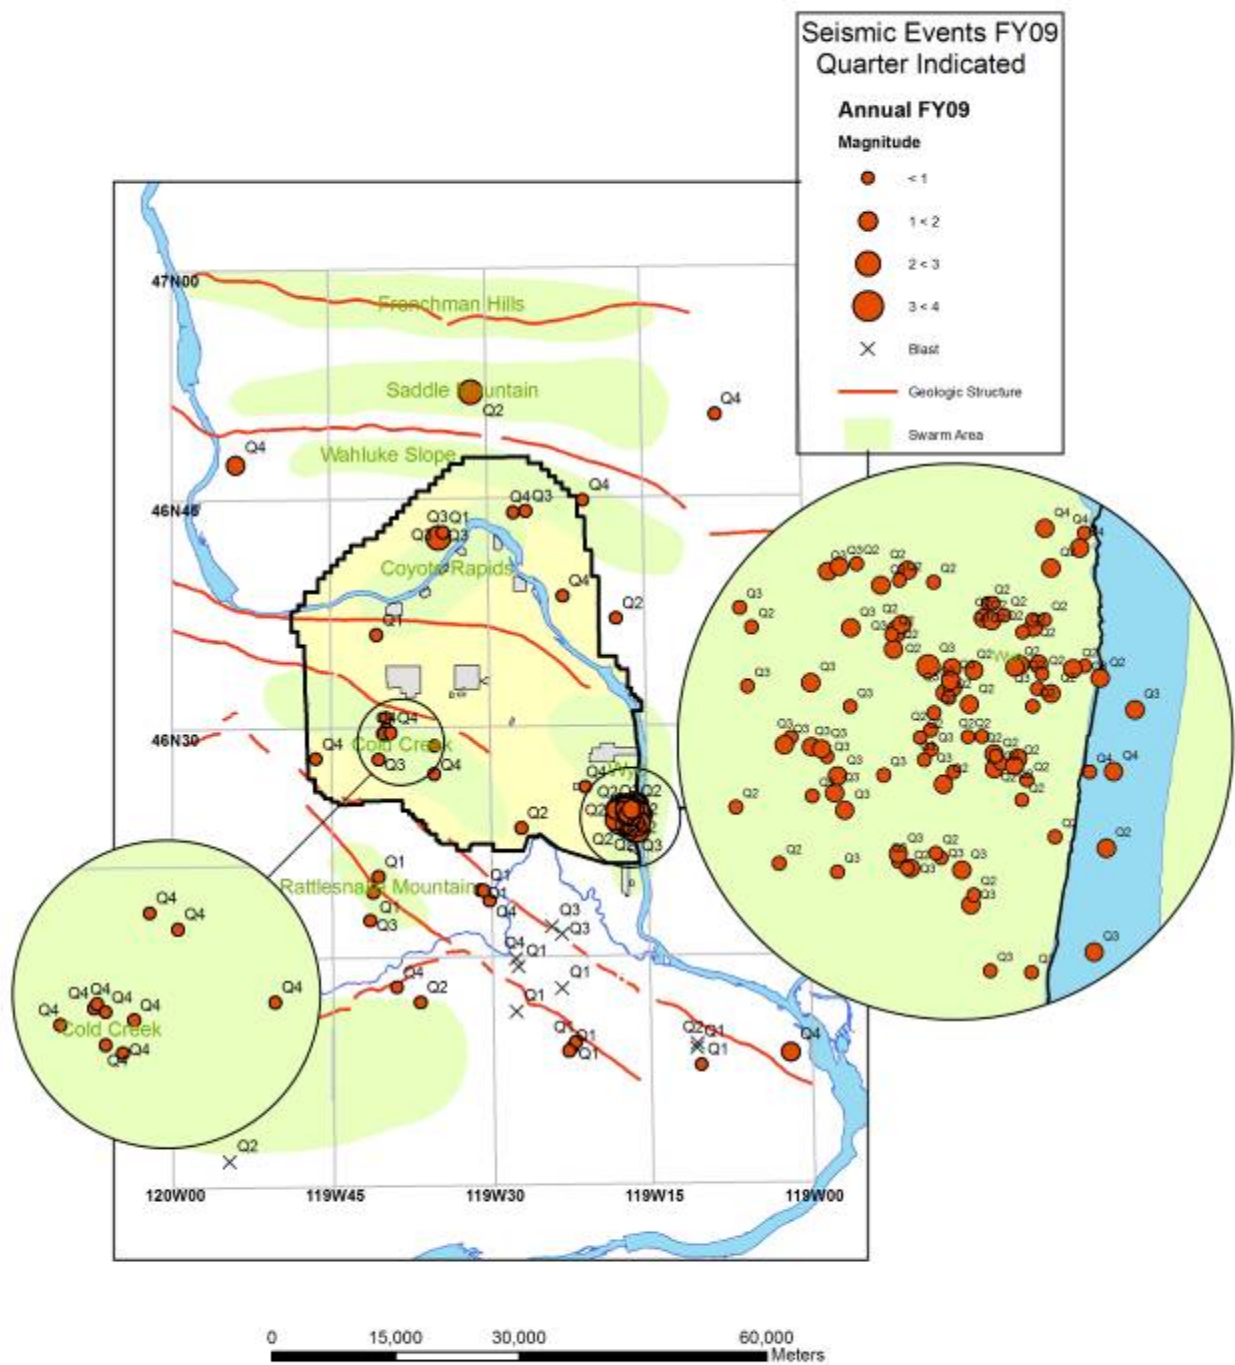


Figure 5.1. FY 2009 Earthquakes Recorded Within the Hanford Monitoring Area (October 2008 through September 2009)

5.2 First Quarter FY 2009 Earthquakes

For the Hanford Seismic Network, 10 local earthquakes were recorded during the first quarter of FY 2009. In the following discussions, *minor earthquakes* refer to seismic events for which the magnitude is less than 1.0 M_c .

5.2.1 Location and Depth of Earthquakes

With regard to the depth distribution, 2 earthquakes occurred at shallow depths (less than 4 km, most likely in the Columbia River Basalt Group -CRBG), 5 earthquakes at intermediate depths (between 4 and 9 km, most likely in the pre-basalt sediments), and 3 earthquakes were located at depths greater than 9 km, within the basement. Geographically, 4 earthquakes occurred in swarm areas and 6 earthquakes were classified as random events.

Swarms were generally thought to occur only at relatively shallow depths within the CRBG, however, in recent years swarms have been recorded at deeper locations, for example, within the Horseheaven Hills (Rohay et al, 2008a).

5.2.2 Major Anticlinal Ridges

No earthquakes were associated with the major geologic structures in the area surrounding the Hanford Site for the first quarter of FY 2009.

5.2.3 Earthquake Swarm Areas

No earthquakes with magnitude greater than 1.0 M_c were recorded in the first quarter of FY 2009.

5.2.4 Random or Floating Events

No earthquakes with magnitude greater than 1.0 M_c were recorded in the first quarter of FY 2009.

5.3 Second Quarter FY 2009 Earthquakes

The Hanford Seismic Network recorded over 800 local earthquakes during the second quarter of FY 2009. Nearly all of these earthquakes were detected in the vicinity of Wooded Island. Most of the events were considered minor with 19 events with magnitude (M_c) estimated in the 2.0-3.0 range.

Outside of the Wooded Island swarm, four earthquakes were recorded. Three earthquakes were considered minor with magnitudes (M_c) less than 1.0 and one event registered 2.3 M_c .

5.3.1 Location and Depth of Earthquakes

With regard to the depth distribution, 800 earthquakes occurred at shallow depths (less than 4 km, most likely in the Columbia River basalts), 1 earthquake at intermediate depth (between 4 and 9 km, most likely in the pre-basalt sediments), and 3 earthquakes were located at depths greater than 9 km, within the crystalline basement. Geographically, 802 earthquakes occurred in swarm areas and 2 earthquakes were classified as random events.

5.3.2 Major Anticlinal Ridges

No earthquakes were associated with the major geologic structures in the area surrounding the Hanford Site for the second quarter of FY 2009.

5.3.3 Earthquake Swarm Areas

Eight-hundred and two (802) earthquakes were characterized as swarm events in the second quarter of FY 2009.

Saddle Mountains Swarm Area

A magnitude 2.3 event was recorded on March 21, 2009 and located at depth 16.7 km within the basement.

Wye Swarm Area

Beginning in January 2009 and continuing through March 2009 approximately 800 earthquakes were recorded in the vicinity of Wooded Island. Most of the events were considered minor with 19 events with magnitude (M_c) in the 2.0-3.0 range. Only those Wooded Island events with magnitude (M_c) greater than or equal to 1.5 are included in Table 4.1. The estimated depths of the Wooded Island events are shallow (averaging less than 1.0 km deep) with a maximum depth estimated at 1.9 km. The maximum magnitude events (2.9 M_c) occurred on February 21 and March 18 at depths 1.8 and 1.2 km, respectively. The Hanford SMA network was triggered numerous times by these events and the SMA recordings are discussed in section 6.0.

The low magnitude of the Wooded Island events has made them undetectable to all but local area residents. The Hanford SMA network was triggered numerous times by these events and the SMA recordings are discussed in section 6.0. Some Hanford employees working within a few miles of the swarm area and individuals living directly across the Columbia River from the swarm center have reported feeling many of the larger magnitude events.

The swarming is likely due to pressure that has built up, cracking the brittle basalt layers within the Columbia River Basalt Formation (CRBG). Similar earthquake swarms have been recorded near this same location in 1970, 1975 and 1988. Prior to the 1970s, swarming may have occurred, but equipment was not in place to record those events.

The Wooded Island swarm, due its location and the limited magnitude of the events, does not pose any significant risk to Hanford waste storage facilities. Since swarms of the past did not intensify in magnitude, seismologists do not expect that these events will persist or increase in intensity. However, Pacific Northwest National Laboratory (PNNL) will continue to monitor the activity.

5.3.4 Random or Floating Events

No earthquakes with magnitude greater than 1.0 M_c were recorded in the second quarter of FY 2009.

5.4 Third Quarter FY 2009 Earthquakes

The Hanford Seismic Network recorded 771 local earthquakes during the third quarter of FY 2009. As in the previous quarter, nearly all of these earthquakes were detected in the vicinity of Wooded Island. Most of the events were considered minor with 25 events with magnitude (M_c) estimated in the 2.0-3.0 range.

Outside of the Wooded Island swarm, seven earthquakes were recorded. Three earthquakes were considered minor with magnitudes (M_c) less than 1.0 and one event registered 2.5 M_c .

5.4.1 Location and Depth of Earthquakes

With regard to the depth distribution, 768 earthquakes were located at shallow depths (less than 4 km, most likely in the Columbia River basalts), 1 earthquake was located at intermediate depth (between 4 and 9 km, most likely in the pre-basalt sediments), and 2 earthquakes were located at depths greater than 9 km, within the crystalline basement. Geographically, 769 earthquakes were located in swarm areas and 2 earthquakes were classified as random events.

5.4.2 Major Anticlinal Ridges

No earthquakes were associated with the major geologic structures in the area surrounding the Hanford Site for the third quarter of FY 2009.

5.4.3 Earthquake Swarm Areas

Seven-hundred and sixty-nine (769) earthquakes were characterized as swarm events in the third quarter of FY 2009.

Coyote Rapids Swarm Area

An event measuring 2.5 M_c was recorded on June 10, 2009 at depth 1.3 km, within the CRBG.

Wye Swarm Area

During the April – June time period 764 earthquakes were recorded in the vicinity of Wooded Island. The frequency of Wooded Island events has subsided with 16 events recorded during June 2009. Most of the events were considered minor with 25 events with magnitude (M_c) in the 2.0-3.0 range. Only those Wooded Island events with magnitude (M_c) greater than or equal to 1.5 are included in Table 4.1. The estimated depths of the Wooded Island events are shallow (averaging less than 1.0 km deep) with a maximum depth estimated at 2.2 km. The maximum magnitude event (3.0 M_c) occurred on May 13 at depth 1.8 km. The Hanford SMA network was triggered numerous times by these events and the SMA recordings are discussed in section 6.0.

5.4.4 Random or Floating Events

No earthquakes with magnitude greater than 1.0 M_c were recorded in the third quarter of FY 2009.

5.5 Fourth Quarter FY 2009 Earthquakes

During the fourth quarter of FY 2009, the HSN recorded 481 triggers, which included 109 events located in the southeast Washington area and an additional 107 regional and teleseismic events. Sixty-three earthquakes were located in the Hanford monitoring area plus one blast event.

5.5.1 Location and Depth of Earthquakes

The depth distribution and geographic pattern of the sixty-three earthquakes that occurred in the Hanford monitoring area are classified in Table 5.1 and Table 5.2. Epicenters of these events are shown in Figure 5.2 (only Wooded Island events with magnitude greater than 1.5 M_c shown). The depth distribution of these events is shown in Figure 5.3 with the events projected onto the 119W30 Longitude cross section.

With regard to the depth distribution, forty-three earthquakes were located at shallow depths (less than 4 km, most likely in the Columbia River basalts), nine earthquakes were located at intermediate depths (between 4 and 9 km, most likely in the pre-basalt sediments), and eleven earthquakes were located at depths greater than 9 km, within the crystalline basement. Geographically, fifty-five earthquakes were located in swarm areas and eight earthquakes were classified as random events.

5.5.2 Major Anticlinal Ridges

No earthquakes were associated with the major geologic structures in the area surrounding the Hanford Site for the fourth quarter of FY 2009.

5.5.3 Earthquake Swarm Areas

Fifty-five earthquakes were characterized as swarm events in the fourth quarter of FY 2009.

Cold Creek Swarm Area

A minor event was recorded on July 4 located at depth 15.2 km within the crystalline basement. A minor event was recorded on August 19 located at depth 20.3 km within the crystalline basement. On September 19 a swarm of ten minor events was recorded with nearly the same epicenters and depths ranging from 7.1-9.4 km. These events appear to have a common location with depth approximately 8.3 km, deep within the pre-basalt sediments.

Coyote Rapids Swarm Area

A minor event was recorded on August 24, 2009 at depth 0.02 km, within the CRBG.

Wye Swarm Area

During the fourth quarter 2009 forty-one earthquakes were recorded in the vicinity of Wooded Island. Most of the events were considered minor with three events with magnitude (M_c) in the 2.0-3.0 range. Only those Wooded Island events with magnitude (M_c) greater than or equal to 1.5 are included in Table 4.1. The estimated depths of the Wooded Island events are shallow (averaging less than 1.0 km deep) with a maximum depth estimated at 2.3 km. The maximum magnitude event (2.7 M_c) occurred on September 11 at depth 2.0 km. The Hanford SMA network was triggered numerous times by these events and the SMA recordings are discussed in section 6.0.

Wahluke Slope Swarm Area

A minor event was recorded on September 9 and located at depth 5.6 km within the pre-basalt sediments.

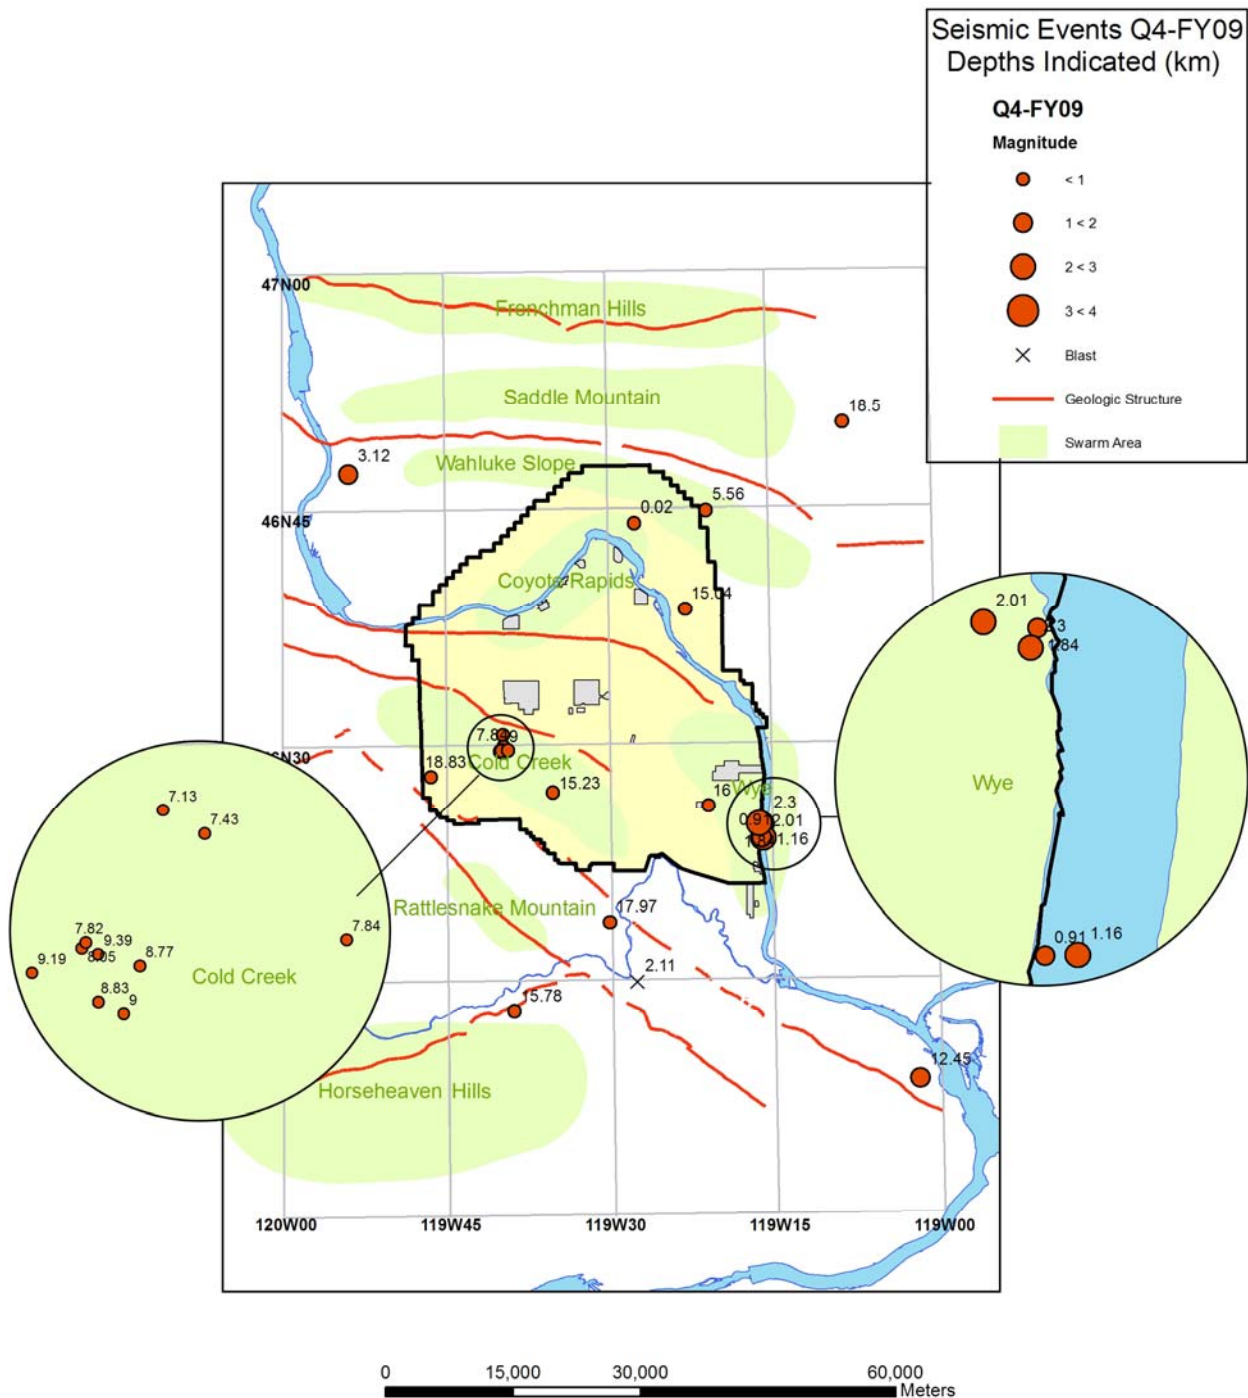


Figure 5.2. Earthquakes Occurring in the Hanford Monitoring Area Between July 1, 2009 and September 30, 2009 (fourth quarter)

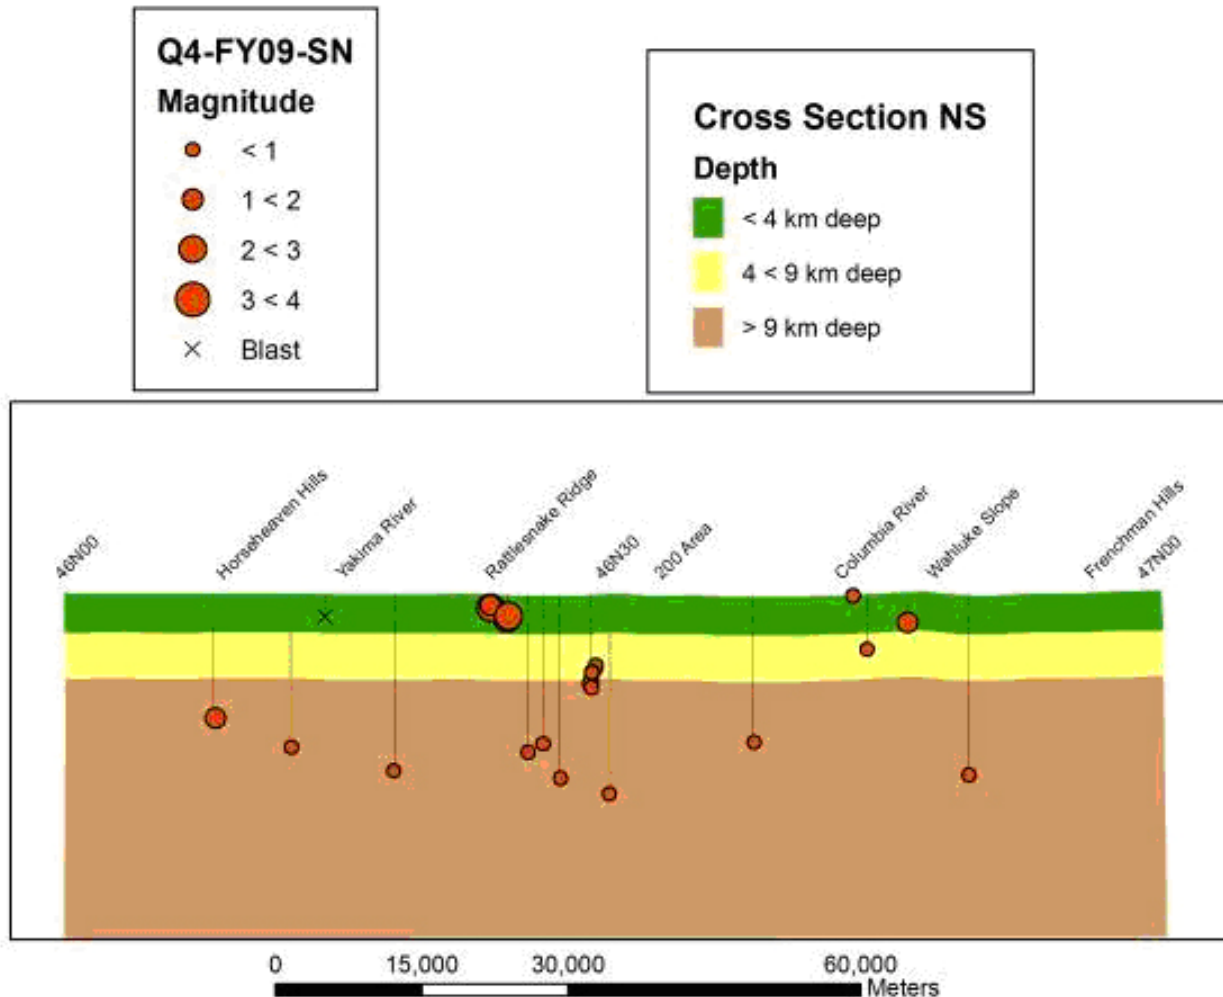


Figure 5.3. Cross-Sectional Depiction (along 119W30 longitude) of Earthquakes Occurring in the Hanford Monitoring Area between July 1, 2009 and September 30, 2009 (fourth quarter)

5.5.4 Random or Floating Events

Eight earthquake events were recorded that were located outside of swarm areas during the fourth quarter of FY 2009. A minor event with epicenter located between the Rattlesnake Mountain and Horseheaven Hills swarm areas at depth 15.8 (crystalline basement) was recorded on July 13. A minor event with epicenter on-site near the western Hanford site boundary at depth 18.8 km (crystalline basement) was recorded on July 30. A minor event with epicenter located on-site within Franklin County at depth 15.0 km (crystalline basement) was recorded on August 9. A minor event with epicenter located about 7 km south of the Hanford site at depth 18.0 km (crystalline basement) was also recorded on August 9. A magnitude 1.2 (M_c) event with epicenter located near Kennewick, WA west of the Columbia River at depth 12.5 km (crystalline basalt) was recorded on August 15. A minor event with epicenter located on-site west of the Wye swarm area at depth 16.0 km (crystalline basement) was recorded on August 19. A magnitude 1.4 (M_c) event with epicenter located west of the Wahluke Slope swarm at depth 3.1 km (CRBG) was recorded on September 7. A minor event with epicenter located east of the Saddle Mountain swarm area at depth 18.5 km (crystalline basement) was recorded on September 9.

6.0 Strong Motion Accelerometer Operations

The Hanford SMA network has been in continuous operation since November 20, 1998. Initially, the threshold used in the SMA network was 0.1% g. In 2006, the trigger threshold was reduced to 0.02% g when new instruments with greater storage capacity were installed. The lower trigger threshold saves the ground motion recordings from smaller, non-damaging earthquakes that can be useful in estimating the ground motion expected from larger earthquakes, and to confirm correct operation of the instruments by analyzing the smaller-amplitude triggers (see Section 2.2).

6.1 Fourth Quarter FY 2009 Triggers of the Hanford SMA Network

The Hanford SMA network was triggered numerous times by the Wooded Island swarm events. The September 11 event (magnitude 2.7 M_c , depth 2.0 km) triggered the 300 Area SMA (located approximately 6.4 km south of the epicenter) and the 400 Area SMA (located approximately 6.9 km west of the epicenter). Peak horizontal accelerations 0.31% g at the 300 Area SMA and 0.20% g at the 400 Area SMA were recorded. The maximal acceleration value was approximately 6 times lower than the reportable action level for Hanford facilities (2% g) and no action was required. Figure 6.1 depicts the acceleration record for the September 11 event at the 300 Area SMA.

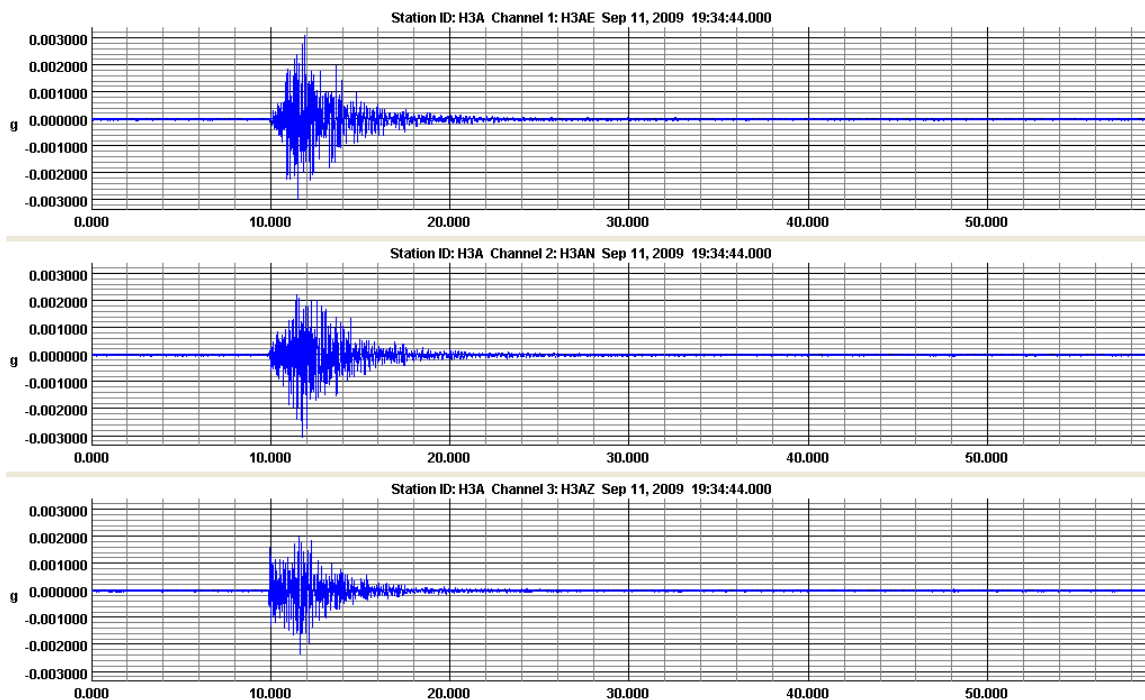


Figure 6.1. Acceleration Records from the September 11, 2009 magnitude 2.7 Swarm Event at the 300 Area SMA

6.2 FY 2009 Triggers of the Hanford SMA Network

The Hanford SMA network was triggered numerous times by the Wooded Island swarm events during FY 2009. The largest event which occurred on May 13 (magnitude 3.0 M_c , depth 1.8 km), triggered the 300 Area SMA (located approximately 4.8 km south of the epicenter), the 400 Area SMA (located approximately 6.3 km west of the epicenter), and the 200-East Area SMA (located approximately 25.6 km northwest of the epicenter). Peak horizontal accelerations 0.75% g at the 400 Area SMA, 0.66% g at the 300 Area SMA, and 0.04% g at the 200-East SMA were recorded. The maximal acceleration value was nearly 3 times lower than the reportable action level for Hanford facilities (2% g) and no action was required. Figure 6.2 depicts the acceleration record for the May 13 event at the 400 Area SMA.

Table 6.1 lists the maximal accelerations recorded at the 300 Area and 400 Area SMA's for the highest magnitude (M_c) events within the Wooded Island swarm recorded during FY 2009. The other SMA triggers associated with the Wooded Island swarm events were very similar to the response to the May 13 (3.0 M_c) event but most showed lower ground acceleration values. No action was required for those triggers.

Table 6.1. Maximum Accelerations from the Highest Magnitude (M_c) Wooded Island Earthquake Swarm Events during FY 2009

SMA Unit			300 A		400 A	
Date	Time	Magnitude (M_c)	% g Horizontal	% g Vertical	% g Horizontal	% g Vertical
2/21/2009	16:51	2.9	0.84	0.25	0.66	0.30
3/12/2009	17:39	2.8	0.54	0.32	0.13	0.10
3/18/2009	6:39	2.9	0.56	0.36	0.25	0.13
3/18/2009	6:47	2.8	0.53	0.43	0.11	0.07
4/4/2009	7:57	2.6	0.44	0.14	0.33	0.22
4/7/2009	23:27	2.5	0.09	0.09	0.18	0.08
4/8/2009	4:04	2.8	0.33	0.18	0.14	0.08
5/4/2009	10:47	2.9	0.57	0.29	0.40	0.30
5/13/2009	7:45	3.0	0.66	0.21	0.75	0.37
5/13/2009	7:50	2.6	0.33	0.14	0.16	0.11
5/16/2009	9:10	2.6	0.19	0.08	0.08	0.05
7/23/2009	11:10	2.5	0.11	0.09	0.07	0.06
9/11/2009	19:34	2.7	0.31	0.23	0.20	0.14

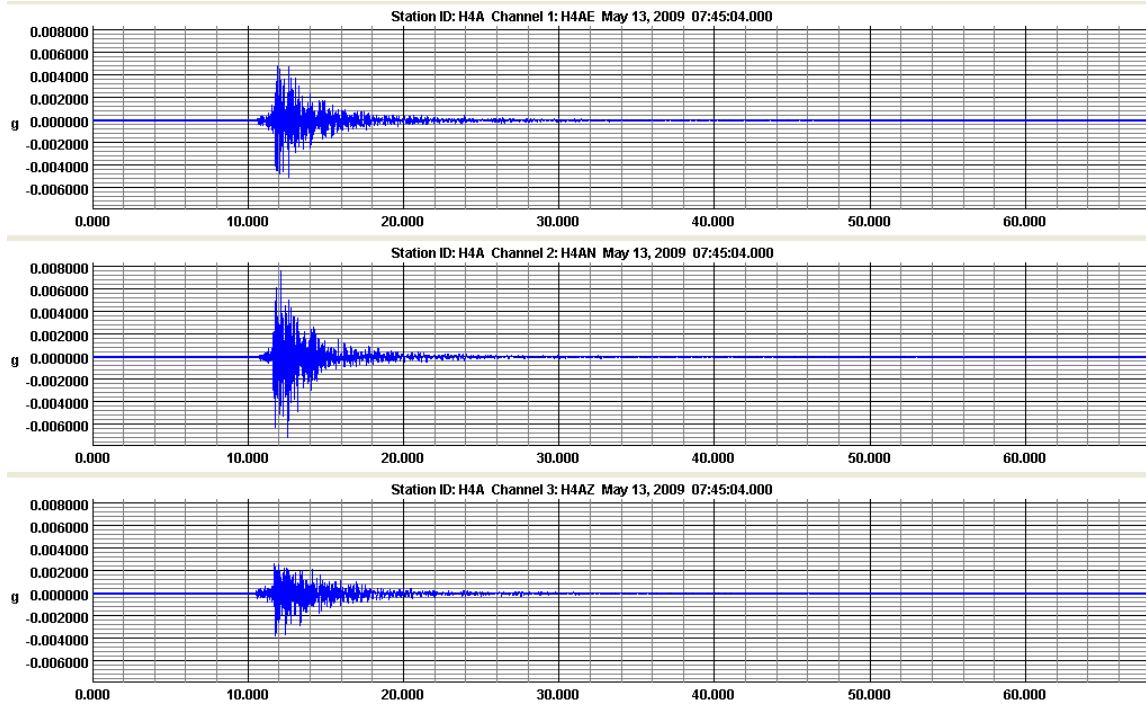


Figure 6.2. Acceleration Records from the May 13, 2009 Wooded Island Swarm Event at the 400 Area SMA

On January 30, 2009 an earthquake was reported with epicenter near Poulsbo, Washington in Puget Sound with magnitude (M_c) 4.5 and depth 58 km. The 100 K, 200 West, and 200 East Area SMA's recorded triggers for this event with maximum horizontal acceleration 0.02% g and maximum vertical acceleration 0.01% g. The SMA trigger threshold of 0.02% g was barely exceeded and no action was required.

On June 10, 2009 an earthquake was recorded within the Coyote Rapids swarm area with epicenter approximately 8 km NNE of the 100-K Area, magnitude (M_c) 2.5, and depth 1.3 km. The 100-K Area SMA recorded a trigger for this event with maximum horizontal acceleration 0.17% g and maximum vertical acceleration 0.15% g. The maximal acceleration recorded (0.18% g) was 11 times smaller than the reportable action level (2% g) for Hanford facilities. The 200-West and 200-East SMA's also triggered with maximum horizontal and vertical accelerations in the 0.02%-0.05% range. No action was required.

7.0 Capabilities in the Event of a Significant Earthquake

The SMA network was designed to provide ground motion data in areas at the Hanford Site that have high densities of people and/or facilities containing hazardous materials, to ensure that the Hanford Site is in compliance with DOE Order 420.1B, Chapter IV, Section 3.d, “Seismic Detection.” The network also allows the HSAP to support Hanford Site emergency services organizations in complying with DOE Order G 420.1-1, Section 4.7, “Emergency Preparedness and Emergency Communications,” by providing area ground motion data in the event of an earthquake on the Hanford Site. This section summarizes the capabilities of the HSAP in the event of an earthquake at Hanford.

Historically, only a few facilities at the Hanford Site had instruments to provide data on peak ground accelerations or any type of ground motion. The current SMA instruments were located so that if an earthquake occurred, ground motion data would be readily available to assess the damage at the 100-K Area, the 200 East and West Areas, and the 300 and 400 Area facilities, which have the greatest concentration of people and also contain hazardous materials (Moore and Reidel 1996).

Many facilities at the Hanford Site have undergone various degrees of seismic analysis, either during design or during requalification. Although the seismic design of a building may be known, when an earthquake is “felt” in a facility on the Hanford Site, a determination must be made as to the extent of damage before it can be reoccupied and the systems restarted. A “felt” earthquake may not cause any significant damage to a building but, without adequate characterization of the ground motion, initial determination of the building’s possibility of having damage may be impossible.

In the event of a major regional earthquake such as the 2001 Nisqually event, building managers, emergency directors, and engineers can obtain ground motion data recorded by the SMA network from the HSAP in the Sigma V Building. This is done through the Hanford Site Emergency Services organization. Normal hours of operation for the HSAP are between 6 a.m. and 4:30 p.m., Monday through Friday. If a SMA is triggered, the HSAP will download events that were recorded and determine the peak ground accelerations. This information is then passed on to Hanford Site Emergency Services personnel where the facility engineers can use the data to determine if the ground motion exceeded, is equal to, or is less than the building design. This, along with assessments from trained engineers, allows the facility manager to make a rapid and cost-effective determination on whether a building is safe to re-occupy or should not be used until it has been inspected in more detail. Buildings that have designs exceeding the recorded ground motion could be put back into service very quickly; buildings with designs that are very close to or less than measured ground motion could be given priority for onsite damage inspections.

8.0 References

- Campbell NP. 1989. "Structural and Stratigraphic Interpretation of Rocks under the Yakima Fold Belt, Columbia Basin, Based on Recent Surface Mapping and Well Data." In *Volcanism and Tectonism in the Columbia River Flood-Basalt Province*, SP Reidel and PR Hooper (eds.), Special Paper 239, pp. 209–222. Geological Society of America, Boulder, Colorado.
- Crosson RS. 1972. "Small Earthquakes, Structure and Tectonics of the Puget Sound Region." *Bulletin of the Seismological Society of America* 62(5):1133–1171.
- DOE. 1988. *Site Characterization Plan for the Reference Location, Hanford, Washington – Consultation Draft*. DOE/RW-0164, Vol. 1, U.S. Department of Energy, Washington, D.C.
- DOE Order 420.1B, Chapter IV, Section 3.d. "Seismic Detection." U.S. Department of Energy, Washington, D.C.
- DOE Order G 420.1-1, Section 4.7. "Emergency Preparedness and Emergency Communications." U.S. Department of Energy, Washington, D.C.
- Fenneman NM. 1931. *Physiography of Western United States*. McGraw-Hill Book Company, Inc., New York.
- Geomatrix. 1996. *Probabilistic Seismic Hazard Analysis, DOE Hanford Site, Washington*. WHC-SD-W236A-TI-002, Rev. 1, Westinghouse Hanford Company, Richland, Washington.
- Moore C and SP Reidel. 1996. *Hanford Site Seismic Monitoring Instrumentation Plan*. WHC-SD-GN-ER-30036, Westinghouse Hanford Company, Richland, Washington.
- Reidel SP and KR Fecht. 1994a. *Geologic Map of the Richland 1:100,000 Quadrangle, Washington*. Open File Report 94-8, Division of Geology and Earth Resources, Washington State Department of Natural Resources, Olympia.
- Reidel SP and KR Fecht. 1994b. *Geologic Map of the Priest Rapids 1:100,000 Quadrangle, Washington*. Open File Report 94-13, Division of Geology and Earth Resources, Washington State Department of Natural Resources, Olympia.
- Reidel SP, NP Campbell, KR Fecht, and KA Lindsey. 1994. "Late Cenozoic Structure and Stratigraphy of South-Central Washington." In *Regional Geology of Washington State*, E Cheney and R Lasmanis (eds.), Bulletin 80, pp. 159-180. Division of Geology and Earth Resources, Washington State Department of Natural Resources, Olympia.
- Reidel SP, KR Fecht, MC Hagood, and TL Tolan. 1989. "Geologic Development of the Central Columbia Plateau." In *Volcanism and Tectonism in the Columbia River Flood-Basalt Province*, SP Reidel and PR Hooper (eds.), Special Paper 239, pp. 247-264. Geological Society of America, Boulder, Colorado.
- Richter CF. 1958. *Elementary Seismology*. W. H. Freeman & Company, San Francisco, California.

Rohay AC, DW Glover, and SD Malone. 1985. *Time-Term Analysis of Upper Crustal Structure in the Columbia Basin, Washington*. RHO-BW-SA-435 P, Rockwell Hanford Operations, Richland, Washington.

Rohay AC, MD Sweeney, DC Hartshorn, RE Clayton, and JL Devary. 2008a. *Third Quarter Seismic Report for Fiscal Year 2008*. PNNL-17830, Pacific Northwest National Laboratory, Richland, Washington.

Rohay AC, MD Sweeney, DC Hartshorn, RE Clayton, and JL Devary. 2009a. *First Quarter Seismic Report for Fiscal Year 2009*. PNNL-18293, Pacific Northwest National Laboratory, Richland, Washington.

Rohay AC, MD Sweeney, DC Hartshorn, RE Clayton, and JL Devary. 2009b. *Second Quarter Seismic Report for Fiscal Year 2009*. PNNL-18633, Pacific Northwest National Laboratory, Richland, Washington.

Rohay AC, MD Sweeney, DC Hartshorn, RE Clayton, and JL Devary. 2009c. *Third Quarter Seismic Report for Fiscal Year 2009*. PNNL-18188, Pacific Northwest National Laboratory, Richland, Washington.

Distribution

No. of Copies

OFFSITE

Administrator
Kennewick General Hospital
P.O. Box 6128
Kennewick, WA 99336

R. Carson
Department of Geology
Whitman College
345 Bayer Avenue
Walla Walla, WA 99362

T. Conrads
Parsons Constructors, Inc.
3005 E. Ainsworth Street
Pasco, WA 99301

J. Schelling
Washington Emergency Management
Division
Building 20, M/S: TA-20
Camp Murray, WA 98430-5122

Idaho Geological Survey
Morrill Hall
University of Idaho
P.O. Box 443014
Moscow, ID 83844-3014

J. Kimball
Defense Nuclear Facilities Safety Board
625 Indiana Avenue NW, Suite 700
Washington, DC 20004

No. of Copies

S. Lilligren
Nez Perce Tribe
P.O. Box 365
Lapwai, ID 83540

J. Litehiser
Bechtel National, Inc.
P.O. Box 193965
San Francisco, CA 94119-3965

- 2 Oregon Department of Geology and
Mineral Industries
Suite 965, 800 NE Oregon Street #28
Portland, OR 97232
ATTN: Library
I. Madin

N. Rasmussen
3140 Ravenshoe Drive
Las Vegas, NV 89134

S. P. Reidel
WSU Tri-Cities
2710 University Drive
Richland, WA 99354

P. Rizzo
105 Mall Boulevard
Suite 270E, Expo Mart
Monroeville, PA 15146

M. Stickney
Montana Bureau of Mines and Geology
Montana Tech University
Earthquake Studies Office
1300 West Park Street
Butte, MT 59701-8997

**No. of
Copies**

3 University of Washington
Seismology Laboratory
Department of Earth and Space Sciences
Box 351310
Seattle, WA 98195-1310
ATTN: P. Bodin
R. Steele
J. Vidale

2 University of Washington
U.S. Geological Survey
Department of Earth and Space Sciences
Box 351310
Seattle, WA 98195-1310
ATTN: C. Weaver
T. Yelin

U.S. Fish and Wildlife Service
3250 Port of Benton Boulevard
Richland, WA 99352

U.S. Geological Survey
Mail Stop 977
345 Middlefield Road
Menlo Park, CA 94025
ATTN: T. Brocher

2 Washington Division of Geology and Earth
Resources
P.O. Box 47007
Olympia, WA 98504-7007
ATTN: Library
T. Walsh

Washington State University
Department of Geology
P.O. Box 643420
Pullman, WA 99164-2812

R. Whale
Shell E&P
200 N. Dairy Ashford
Houston, TX 77079

**No. of
Copies**

I. G. Wong
URS Corporation
1333 Broadway, Suite 800
Oakland, CA 94612

J. Zollweg
Boise State University
Department of Geosciences
Boise, ID 83725

ONSITE**6 DOE Richland Operations Office**

B. L. Charboneau	A6-33
K. L. Flynn	A6-35
T. Y. Hale	A7-89
R. D. Hildebrand	A6-38
J. G. Morse	A6-38
Y. T. Sherman	A6-35

2 DOE Office of River Protection

R. A. Gilbert	H6-60
M. R. Moreno	H6-60
R.K. Nielsen	H6-60

Washington River Protection Solutions

F. M. Mann	H6-03
------------	-------

7 CH2M Hill Plateau Remediation Co.

M. E. Brown	G5-51
J. T. Curtis	B3-15
S. A. Fargo	H8-60
S. M. Faulk	A3-05
B. H. Ford	E6-44
M. I. Wood	H8-44

**No. of
Copies****Stoller**

R. G. McCain B2-62

Washington State Department of Ecology

J. Caggiano H0-57

**No. of
Copies****16 Pacific Northwest National Laboratory**

R. E. Clayton K6-75

J. L. Devary (5) K6-96

D. C. Hartshorn K6-75

B. E. Opitz K6-75

A. C. Rohay K6-75

M. D. Sweeney (5) K6-75

Hanford Technical Library (2) P8-55



902 Battelle Boulevard
P.O. Box 999
Richland, WA 99352
1-888-375-PNNL (7665)

www.pnl.gov



U.S. DEPARTMENT OF
ENERGY